		HNICAL SF	PECIFICAT	ΓΙΟΝ	I-E	T-3010.	00-5524			
BR	CLIENT			PETROBE	RAS			SHEET	1 _{of}	17
	JOB		SESDV M	IONITORII	NG SYS	STEM				
PETROBRAS	AREA	A								
	TITLE	MO	NITORIN	G SYSTEM	√ FΩR 9	SUBSEA	\	INIT	ERNA	,
SUB				HUT-DOW				/// //	LKNA	
COB		LINEIXO		FPU SCO		_ (0_0.	3 •)	SUB/E	S/EDA/E	ΕΑΙ
				VISION IN						
REV.	EV. DESCRIPTION AND/OR REVISED SHEETS									
0		ea Emergeno		l on the previ						
	REV. 0	REV. A	REV. B	REV. C	REV. D	REV. E	REV. F	REV. G	Rev	Н
DATE	28/02/2025									
DESIGN	EAI									
EXECUTION	BYE8									
CHECK	DVHV									
APPROVAL	NTHF				·					
THE INFORMATION C	CONTAINED IN THIS	DOCUMENT IS PETR	OBRAS PROPERTY	AND MAY NOT BE US	SED FOR PURPO	OSES OTHER TH	AN THOSE SPE	CIFICALLY INDIC	CATED HERE	IN.
THIS FORM IS PAR	T OF PETROBRAS	N-0381 REV. L								



TECHNICAL SPECIFICATION IN I-ET-3010.00-5524-854-PX9-001 REV. 0

JOB SESDV MONITORING SYSTEM SHEET 2 of 17

MONITORING SYSTEM FOR SUBSEA EMERGENCY SHUT-DOWN VALVE (SESDV) – FPU SCOPE

TABLE OF CONTENTS

1	IN	TRODUCTION	3
2	AE	3BREVIATIONS	3
3	RE	EFERENCE DOCUMMENTS, CODES AND STANDARDS	3
	3.1	International standards	3
	3.2	PETROBRAS Documents	4
4	DE	EFINITIONS	4
5	TE	ECHNICAL CARACTERISTICS	5
	5.1	Design and fabrication	5
	5.2	Qualification	5
6	GE	ENERAL TECHNICAL REQUIREMENTS	5
	6.1	System overview	5
7	M	ONITORING SYSTEM TOPSIDE COMPONENTS	7
	7.1	Topside system overview	7
	7.2	SESDV Topside Processing	7
	7.3	ICSS Interface	8
	7.4	Software Requirements	8
	7.5	SESDV Electrical JBs	10
	7.6	SESDV topside cabling	11
	7.7	Umbilical Topside Interface	11
8	M	ONITORING SYSTEM SUBSEA COMPONENTS	12
	8.1	SUBSEA Instrumentation	12
9	IN	STALLATION AND COMMISSIONING REQUIREMENTS	13
10) TE	ECHNICAL DOCUMENTATION	14
11	l TE	ESTS AND INSPECTIONS	14
12	SE	ESDV MONITORING SYSTEM SCOPES	14
	12.1	FPU CONTRACTOR/SELLER responsibilities	14
	12.2	2 FPU OPERATOR responsibilities	15
	12.3	3 UMBILICAL CONTRACTOR responsibilities	15
	12.4	SESDV CONTRACTOR responsibilities	15
	12.5	5 Scopes of Supply	16
	12.6	S Scopes of Work	17



TECHNIC	AL SPECIFICATION	[№] I-ET-3010.00-5524-85	4-PX	9-001	REV.	0
JOB	SESDV MONIT	ORING SYSTEM	SHEET	3	of	17

1 INTRODUCTION

This document presents the Technical Specification of the FPU scope for the Subsea Emergency Shut-down Valve (SESDV) Monitoring System.

2 ABBREVIATIONS

AC - Alternating Current;

TITLE

DC - Direct Current;

EC - Electrical connector

ET -Technical Specification;

EFL – Electric Flying Lead

FAT – Factory Acceptance Test;

FPU – Float Production Unit;

GMT - Greenwich Mean Time;

HFL - Hydraulic Flying Lead

ICSS - Integrated Control and Safety System

IEC - International Electrotechnical Commission;

PBOF - Pressure Balanced Oil Filled;

PLC - Programmable Logic Controller

PT – Pressure Transducer;

ROV –Remotely Operated Vehicle;

RM – Material Requisition;

SESDV – Subsea Emergency Shut-down Valve;

UEH – Electro-Hydraulic Umbilical;

UEP – Stationary Production Unit;

UTA – Umbilical Termination Assembly;

SDU – Subsea Distribution Unit;

SIT - Site Integration Test;

ZT – Position transducer.

3 REFERENCE DOCUMMENTS, CODES AND STANDARDS

This section lists standards and documents applicable to the design of the control and monitoring system:

3.1 International standards



TECHNICA	AL SPECIFICATION	N°	I-ET-3010.00-5524-85	4-PX9	-001	REV.	0	
JOB	SESDV MONIT	OF	RING SYSTEM	SHEET	4	of	17	

- [1]API 6A Specification for Wellhead and Christmas Tree Equipment
- [2]API 17E Specification for Subsea Umbilicals

TITLE

- [3]API 17F Standard for Subsea Production Control Systems
- [4] API 17Q Recommended Practice on Subsea Equipment Qualification
- [5]ASME B16.5:2013 Standard Specification for Alloy-Steel and Stainless Steel Bolting for Low-Temperature Service
- [6] ASME B16.5:2013 Pipe Flanges and Flanged Fittings
- [7] DNVGL-RP-B401:2017 Cathodic Protection Design
- [8]IEC 60079 (latest revision) Series Explosive Atmosphere Standards
- [9]IEC 60092 (latest revision) Electrical installations in ships ALL PARTS
- [10] IEC 60502-1- Power cables with extruded insulation and their accessories for rated voltages from 1 kV (Um = 1,2 kV) up to 30 kV (Um = 36 kV)
- [11] IEC 60529 (latest revision) Degrees of Protection Provided by Enclosures (IP Code)
- [12] IEC 61892-6 (latest revision) Mobile and fixed offshore units Electrical installations Part 6: Installation
- [13] DNV-RP-H103 Modelling and Analysis of Marine Operations
- [14] ISO 13628-6:2006 (Note: The cleaning classification for hydraulic fluids of the old NAS 1638 standard ("Cleanliness Requirements used in Hydraulic Systems") is cited in this specification as a reference best known by the industry. The most current standard is SAE AS 4059 ("Cleanliness Classification for Hydraulic Fluids");

3.2 PETROBRAS Documents

- [15] I-ET-3000.00-1510-800-PEK-002 UMBILICAL TERMINATION ASSEMBLY (UTA) CONTROL SYSTEM FOR SUBMARINE EXPORT SYSTEMS
- [16] I-ET-3010.2Q-1200-850-P4X-001- SPECIAL MONITORING SYSTEMS (if applicable)
- [17] I-ET-3000.00-1519-29B-PZ9-012- TOPSIDE ARRANGEMENT AND INTERFACES WITH SUBSEA UMBILICAL SYSTEMS

4 DEFINITIONS

SESDV CONTRACTOR	The company responsible to design, construct and supply the SESDV SYSTEM
FPU CONTRACTOR/SELLER	The entity that is responsible for the Engineering, Procurement, and Construction of the Floating Production Unit (FPU), as established in the contract of the FPU and supply the FPU topside infrastructure of SESDV SYSTEM
FPU OPERATOR	PETROBRAS or company contracted by PETROBRAS to operate FPU topside.



TE	CHNICAL SPECIFICATION	N° I-ET-3010.00-5524-85	4-PX9	-001	REV.	0
JOB	SESDV MONIT	FORING SYSTEM	SHEET	5	of	17
TITLE	MONITORING OVERTIMES	DOLLDOEA EMEDOENOV O		014/1		

SUPPLIER	Company hired by FPU CONTRACTOR/SELLER,
	to supply components from SESDV MONITORING
	SYSTEM.
MAY	It is used when alternatives are equally acceptable
SHOULD	It is used when a provision is not mandatory, but is
	recommended as a good practice
SHALL	It is used when a provision is mandatory
AVAILABILITY	Probability that the system will remain operating
	under the conditions specified in the project during
	its useful life.

5 TECHNICAL CARACTERISTICS

5.1 Design and fabrication

- **5.1.1** All subsea monitoring components shall be designed in accordance with [2] and [3].
- **5.1.2** Selection of materials for all subsea structures shall be in accordance with [7] item 5.5 and be designed for the same design life as the SESDV.
- **5.1.3** All enclosures and equipment to be placed in hazardous areas shall comply and be certificated according to [8].
- **5.1.4** All enclosures with a required degree of ingress protection shall comply with [11].
- **5.1.5** All electrical cabling specifications and installations shall comply with [9] and IEC [12].
- 5.1.6 Electrical and communication analyses shall be performed, including simulations considering the parameters of specified cable types (for deck and umbilical lines). For electrical analysis, the maximum length of the UEH shall be 10 km using TSP conductors with 2.5mm² cross section.

5.2 Qualification

5.2.1 All subsea equipment shall be qualified in accordance with [3], [4] or [14].

6 GENERAL TECHNICAL REQUIREMENTS

6.1 System overview

- **6.1.1** Each SESDV foreseen at field project shall receive electrical conductors, coming from the FPU, through a general arrangement using UEH and UTA, as shown in Figure 1.
- **6.1.2** The monitoring system and actuation can follow two arrangement options:
 - One umbilical connects FPU to just one SESDV (Option 1 –Figure 1).
 - One umbilical connects FPU to more than one SESDV, through a SDU (Option 2 -Figure 1).

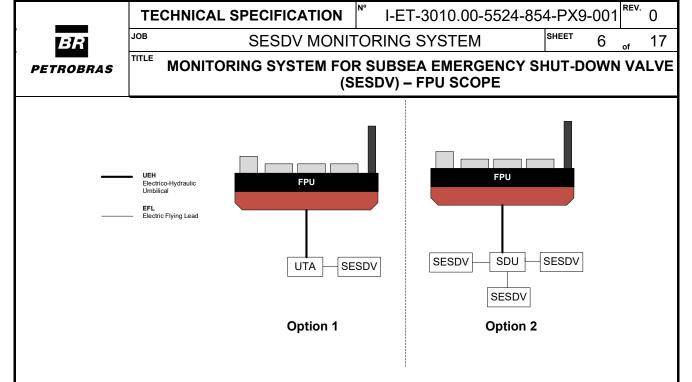


Figure 1: General schematic of the subsea layout with SESDV Monitoring System.

- 6.1.3 This technical specification describes FPU provisions for SESDV monitoring system. FPU CONTRACTOR/SELLER shall provide the required structure for all SESDV foreseen in field project. The base case for this technical specification is Option 1, however if the subsea layout would foresee Option 2, the topside supply (i.e., topside cabling and acquisition channels) shall be dimensioned accordingly.
- **6.1.4** Figure 2 presents the general architecture of SESDV Monitoring System

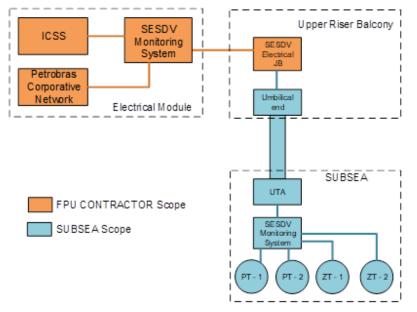


Figure 2: General Architecture of SESDV Monitoring System.

- **6.1.5** Cabling shall be designed in accordance with international standards.
- **6.1.6** Connectors/terminations shall be properly protected from exposure before final assembly to junction boxes and other equipment.
- **6.1.7** All junction boxes/cabinets shall be properly identified with visible tags.
- **6.1.8** All cabling (at dry area) shall be properly identified with visible tags.



TE	CHNICAL SPECIFICATION	[№] I-ET-3010.00-5524-85	4-PX	9-001	REV.	0
JOB	SESDV MONIT	FORING SYSTEM	SHEET	7	of	17
TITLE	MONITORING OVERTIMES	DOUBLE EMERGENOV				

- **6.1.9** Individual conductors within a bundle (multi-cable) shall be properly identified on both ends, through tags and/or color coding.
- **6.1.10** Cabling shall conform to [10].
- **6.1.11** The SESDV MONITORING SYSTEM shall contain sensors (main and redundant) to monitor:
 - Valve position indication (ZT) of the SESDV shutter.
 - Pressure (PT) from hydraulic actuation system control line of SESDV system.
- 6.1.12 From FPU Topside, the electrical cables from the UEH shall be connected to a topside processing system connected with FPU ICSS, for the power supply and data acquisition of the SESDV MONITORING SYSTEM signals.
- 6.1.13 If there is a conflict of specifications in this documentation and in its references, the most demanding specification shall prevail, unless otherwise expressly directed by PETROBRAS.
- **6.1.14** For electrical analysis, the maximum length of the UEH shall be 10 km using TSP conductors with 2.5mm² cross section.

7 MONITORING SYSTEM TOPSIDE COMPONENTS

7.1 Topside system overview

- **7.1.1** Topside scope of supply shall comply by:
 - 7.1.1.1 1 (one) SESDV Topside Processing (Section 7.2),
 - 7.1.1.2 1 (one) SESDV Electrical JB (Section 7.5) for each SESDV umbilical slot
 - 7.1.1.3 Topside electrical cabling (section 7.6).

7.2 SESDV Topside Processing

- **7.2.1** The SESDV Topside Processing system shall:
 - 7.2.1.1 Power Supply subsea sensors.
 - 7.2.1.2 Collect and storage subsea sensors data (in high frequency).
 - 7.2.1.3 Forward subsea sensor data to ICSS.
- 7.2.2 All cabling from SESDV Monitoring System shall be terminated in a cabinet located in the Electrical Module. It is FPU CONTRACTOR/SELLER responsibility to supply and install the cabinet and its components. The cabinet name will depend upon the project and its details will be fully described on the following documents:
 - Subsea Interface Cabinet if Ref [17] is applicable or
 - SAS Cabinet if General Technical Document (GTD) is applicable
- **7.2.3** The SESDV Topside Processing shall be designed for using 15U in its corresponding cabinet.
- **7.2.4** FPU CONTRACTOR/SELLER shall foresee individual circuit brakers for SESDV Topside Processing. FPU CONTRACTOR/SELLER shall provide inside cabinet surge



TE	CHNICAL SPECIFICATION	^{N°} I-ET-3010.00-5524-85	4-PX9	-001	REV.	0
JOB	SESDV MONIT	FORING SYSTEM	SHEET	8	of	17
TITLE	MONITORING OVERTIMES	DOUBLE EMERGENOV				

protectors connected to FPU grounding system.

- 7.2.5 The SESDV Topside processing shall be powered by a nominal voltage of 220 V AC (+/- 10%), 50-60Hz, to be supplied through a cable including a protective earth conductor.
- 7.2.6 SESDV Topside processing shall provide DC power supplies and media converters inside cabinet and prioritize installation using 19-inch multi-slot rack. LAN Network connection (Cat-6 network cable) shall permit remote access by corporative network.
- 7.2.7 SESDV Topside processing shall have two communication interfaces:
 - 7.2.7.1 On interface connected to Corporative Network (through Petrobras Firewall) to allow remote access,
 - 7.2.7.2 One interface connected to ICSS to forward sensor data.
- 7.2.8 FPU CONTRACTOR/SELLER shall provide user interface devices, including keyboard, mouse, and monitor (KVM 1U rack mounted), for local access to the supervisory system. All user interface devices shall be installed at a comfortable height for human users and with proper consideration for ergonomics.

7.3 ICSS Interface

- 7.3.1 The forwarding of sensor data to ICSS can use TCP/IP protocol (observed cybersecurity, considering automation network) and final solution shall be presented for PETROBRAS approval.
- 7.3.2 For each SESDV, FPU CONTRACTOR/SELLER shall provide two dry contacts from FPU ICSS for each hydraulic function line. The two dry contacts functions for each line shall be SESDVX_OPEN_COMMAND and SESDVX_CLOSE_COMMAND (Where "X" is a sequential number). The FPU ICSS logic shall be closing the dry contact for 60 seconds after the command is executed at the solenoid from SESDV HPU rack
- **7.3.3** FPU CONTRACTOR/SELLER shall provide cabling needed for required interface between ICSS and SESDV Topside processing.
- **7.3.4** FPU CONTRACTOR/SELLER shall terminate at SAK terminals the dry contacts from FPU ICSS and SESDV electrical conductors from SESDV Electrical JBs.
- 7.3.5 FPU CONTRACTOR/SELLER shall also record at FPU ICSS the SESDV position indicator (ZT) and pressure indicator (PT) signals.
- **7.3.6** The Supervisory screen from the ICSS shall indicate the information of each SESDV sensor from monitoring system.
- **7.3.7** Information from SESDV position indicator (ZT) shall be included in the FPU cause and effect matrix.

7.4 Software Requirements

- 7.4.1 The software shall be based on Microsoft Windows solution. The use of a wellestablished integrated automation solution able to provide all required functionalities is strongly advised.
- **7.4.2** In the case of power loss, the main processing equipment shall be able to restart automatically without the need for operator intervention.
- **7.4.3** FPU CONTRACTOR/SELLER shall provide a document, during the commissioning,

	TE	CHNICAL SPECIFICATION	I-ET-3010.00-5	524-854-PX9	-001	REV.	0
BR	JOB	SESDV MONIT	ORING SYSTEM	SHEET	9	of	17
	TITLE						

containing all administrator passwords needed to operate and manage all equipment.

- **7.4.4** The software shall act as an interface to human operators and external systems of the monitoring system.
- 7.4.5 Dedicated supervisory screens shall report the value of every monitored variable as they are acquired, along with the status of communication channels of each monitoring unit, including cabinet housekeeping data.
- **7.4.6** The software shall allow for querying and plotting of historical data for user-selectable intervals.
- **7.4.7** Data shall be recorded in sets of array files compatible with Microsoft Excel 2003 or newer (*.CSV).
- **7.4.8** Data shall have included inside GMT timestamp.

PETROBRAS

- **7.4.9** A database system for storage of generated all data points (monitored variables and housekeeping) shall be included in a OPC server.
- 7.4.10 The database shall operate on a circular buffer pattern, whereby older records shall gradually be overwritten by newer samples once the database reaches its capacity. Storage space shall be provided as a dedicated RAID 1 array, sized for at least 24 months of logging at the highest possible data sampling rate.
- **7.4.11** The software shall record the SESDV position indicator with sample rate of 1Hz.
- **7.4.12** The software solution shall design a continuous high frequency sample rate (4Hz) circular buffer pattern solution of the acquisition of the pressure transmitter, whereby older records shall gradually be overwritten by newer samples once the buffer reaches its capacity. The buffer window shall be 10 minutes.
- 7.4.13 When the software receives a SESDV OPEN/CLOSE command (dry contacts), the software will extract a 10-minute data array starting 1 minute earlier than the received command as illustrated in Figure 3.

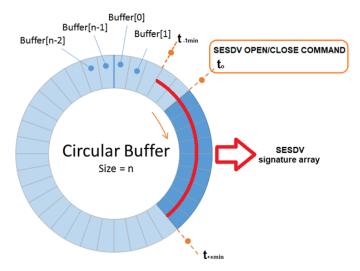


Figure 3: SESDV signature array circular buffer schematic.

7.4.14 To comply with the sample frequency requirement on 7.4.12, the PLC shall be able to retrieve the data at high frequencies without any package losses. A buffer solution may be proposed by FPU CONTRACTOR/SELLER. Proposed solution shall be presented to PETROBRAS for review and approval during FPU detailing phase.

	TECHNI	CAL SPECIFICATION	[№] I-ET-3010.00-5524-8	354-PX	9-001 RE	v. 0
BR	JOB	SESDV MONIT	ORING SYSTEM	SHEET	10 _{of}	17
	TIT! F					

- **7.4.15** The data batch shall be compiled into a CSV file and stored. The data shall be available for consultation through Petrobras Corporative Network.
- 7.4.16 Confirmation of this functionality shall be done by applying a 2Hz sinusoidal signal (based on Nyquist Rate) at the JB and confirmation that the CSV file is generated with the expected high frequency data upon an open/close command of the valve. This test shall be done during FAT activities at the shipyard. General concept of the test is illustrated on Figure 4.

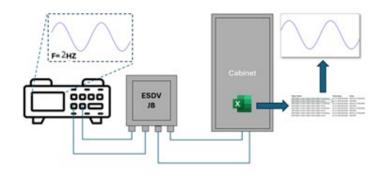


Figure 4: Sine Test general concept.

- 7.4.17 Two categories of password protected user accounts shall be implemented, common and privileged. Access to all functionalities of the software shall be restricted exclusively to authenticated users belonging to one of these categories.
- 7.4.18 Configuration duties, including the management of the various monitoring units and of the user accounts themselves, shall be restricted to privileged users. All view-only functionalities shall be available to all authenticated users.
- **7.4.19** The software shall keep a log of all accesses, both local and remote, for a minimum of 12 months.
- 7.4.20 The software shall provide Web Interface (HTTP) access to all screens from within PETROBRAS corporate network. Authenticated users shall be given access to all functionalities just as they are available locally.
- **7.4.21** The Web Interface shall be fully compatible with the latest versions of the Internet Explorer, Mozilla Firefox and Google Chrome browsers, without the aid of any plugins.
- **7.4.22** At least 20 concurrent accesses to the software shall be supported by the Web Interface.
- **7.4.23** The standard Microsoft Windows remote desktop solution shall also be provided to allow remote access to the system from onshore facilities.

7.5 SESDV Electrical JBs

PETROBRAS

- **7.5.1** FPU CONTRACTOR/SELLER shall provide one JB (named SESDV Electrical JB) for each SESDV slots position in FPU.
- 7.5.2 SESDV Electrical JB shall be installed close to umbilical end of each SESDV.
- 7.5.3 SESDV Electrical JB has the function to arrange SESDV electrical signals of 2 (two) PT sensors (main and redundant), and 2 (two) ZT sensors (main and redundant) of each SESDV.

	TECHN	IICAL SPECIFICATION	[№] I-ET-3010.00-5	5524-854-PX	9-001	REV.	0
BR	JOB	SESDV MONIT	ORING SYSTEM	SHEET	11	of	17
	TITLE						

- 7.5.3.1 The PT and ZT sensors shall have its entire electrical interface established by 2 (two) wires, which simultaneously perform the electrical supply and the analog communication (passive 4-20mA sensor). Analog communication and power supply shall be in accordance with Appendix D of [3].
- 7.5.4 At SESDV Electrical JB, FPU CONTRACTOR/SELLER shall consider 4 inlets for SUBSEA side for each SESDV attended. For these inlets plugs (installed) and cable glands (as spare) shall be provided. After umbilical installation the plugs will be replaced by cable glands.
- **7.5.5** FPU CONTRACTOR/SELLER shall consider that one umbilical can attend more than one SESDV (See Figure 1).
- **7.5.6** The connection of four sensors shall demand three (positive sharing) or four (one pair to each sensor) pairs depending on subsea electrical connection. See Figure 5.

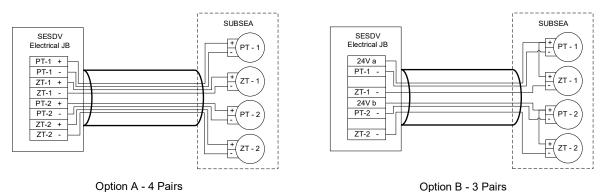


Figure 5: SESDV Monitoring System electrical wiring.

- **7.5.7** FPU CONTRACTOR/SELLER shall provide infrastructure able to support both scenarios of Figure 5.
- **7.5.8** To arrange SESDV signals, these JBs shall aggregate electrical conductors at SAK terminals according to the UEH configuration (3 pairs or 4 pairs).
- **7.5.9** Each SESDV Electrical JB shall be installed in places with easy access, in maximum heigh of 2 meters and where is dismiss the use of safety harness for high work.
- **7.5.10** Each SESDV Electrical JB shall be sealed against dust and powerful water jets (protection degree IP-66).
- **7.5.11** Each SESDV Electrical JB and cable glandes specification/installation shall be in accordance with its corresponding area classification.

7.6 SESDV topside cabling

PETROBRAS

- **7.6.1** FPU CONTRACTOR/SELLER shall provide cabling for each SESDV functions slots position in FPU.
- **7.6.2** FPU CONTRACTOR/SELLER shall provide two multicable (main and spare) with 4 TSP with conductor cross section of 4mm² for each SESDV foreseen in project. These multicables shall connect the cabinet and the respective SESDV Electrical JB.

7.7 Umbilical Topside Interface

- **7.7.1** FPU CONTRACTOR/SELLER shall provide electrical and hydraulic umbilical interface in accordance with [18].
- **7.7.2** It is FPU CONTRACTOR/SELLER responsibility to provide hydraulic tubes and hoses

	TE	CHNICAL SPECIFICATION	IN-	I-ET-3010.00-55	24-85	4-PX9)-001	REV.	
BR SESDV MONITORING SYSTEM					SHEET	12	of		
PETROBRAS	TITLE	MONITORING SYSTEM FOR	R S	UBSEA EMERGEN	ICY SI	HUT-D	OWN	VA	L

0

17

connection points.

7.3 It is EPLL CONTRACTOR/SELLER responsibility to provide all cable glands and

for connecting the umbilical hydraulic pigtails to the corresponding TUTU plate

7.7.3 It is FPU CONTRACTOR/SELLER responsibility to provide all cable glands and electrical terminations to be used for the installation of the umbilical electrical pigtail to the internal block terminals inside the electrical JB.

8 MONITORING SYSTEM SUBSEA COMPONENTS

8.1 SUBSEA Instrumentation

- **8.1.1** This section describes the subsea components, to provide FPU CONTRACTOR/SELLER with subsea system topology.
- **8.1.2** The electrical system shall have in its composition the submarine instrumentation comprising of:
 - 8.1.2.1 2 (two) PT sensors (main and redundant), resident inside the MONITORING MODULE (ROV retrievable module), with the function of monitor the pressure of the actuation hydraulic line of the SESDV.
 - 8.1.2.2 2 (two) ZT sensors (main and redundant), resident inside the SESDV actuation structure, with the function of monitor the position indication of the SESDV shutter.
- 8.1.3 The PT and ZT sensors shall have their entire electrical interface established by 2 (two) wires, which simultaneously perform the electrical supply and the analog communication (passive 4-20mA sensor). Analog communication and power supply shall be in accordance with Appendix D of [3].

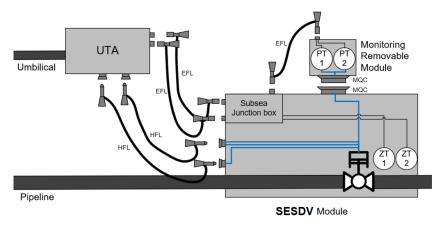


Figure 6: SESDV MONITORING SYSTEM subsea general schematic

8.1.4 Features of PT sensors:

Calibration range: 0 to 7500 psi

Maximum allowable pressure: 10k psi

Break pressure: 15k psi

Stability: ± 0.1 % FS/year

 Accuracy: ± 0.2 % FS ("zero / span setting and temperature effects" - TOTAL ERROR BAND)



TECHNICAL SPECIFICATION	[№] I-ET-3010.00-5524-85	4-PX9	-001	REV.	0
JOB SESDV MONIT	TORING SYSTEM	SHEET	13	of	17
TITLE					

Repeatability: ± 0.06% FS

■ Resolution: 0.03 % FS

Power supply: 12 to 36 VDC

Output signal: 4 to 20 mA

8.1.5 Features of ZT sensors:

Fully opened position: 4mA

Fully closed position: 20mA

 Accuracy: ± 0.6% FS ("zero / span setting and temperature effects" - TOTAL ERROR BAND)

Power supply: 12 to 36 VDC

Output signal: 4 to 20 mA

9 INSTALLATION AND COMMISSIONING REQUIREMENTS

- 9.1.1 The requirements presented in this section shall be met regarding commissioning activities. Planning of installation and commissioning activities shall be developed and submitted for PETROBRAS approval.
- 9.1.2 Commissioning is understood, in this context, as the process of placing the system (or parts thereof related to a particular monitored structure) in a fully functional state, without any pending issues.
- 9.1.3 All equipment shall be tested onshore before deployment at sea. Testing and interventions on equipment shall not be planned or performed during offshore deployment (on deck), save for emergency occasions, in which case approval shall be explicitly given by PETROBRAS.
- 9.1.4 The fully commissioning of SESDV Monitoring system is in SESDV CONTRACTOR scope, however, FPU CONTRACTOR/SELLER, shall commission all topside infrastructure in its scope.
- **9.1.5** In terms of Acceptance Test, the FPU CONTRACTOR/SELLER shall evidence, at least:
 - Cabling and power supply
 - Certification of all network cables related to SESDV Monitoring System
 - Fully testing of each SESDV cabling
 - FPU ICSS dry contacts tests
 - Fully testing of each SESDV topside software functions using simulators
 - Data batch test as described at 7.4.16
- 9.1.6 FPU CONTRACTOR/SELLER shall provide all infrastructure for SESDV CONTRACTOR, to allow it to complete the fully commissioning of SESDV Monitoring system (offshore), including access to installation, power supply and information related the system.



TE	CHNICAL SPECIFICATION	[№] I-ET-3010.00-5524-85	4-PX9	-001	REV.	0
JOB	SESDV MONIT	TORING SYSTEM	SHEET	14	of	17
TITLE	MONITORING OVERTIMES	DOLLDOEA EMEDOENOVO				

10 TECHNICAL DOCUMENTATION

- **10.1.1** During de executive design shall be issued to PETROBRAS approval a Technical Proposal of the FPU CONTRACTOR/SELLER scope, including Datasheets, manuals and certificates for all equipment or cable supplied by FPU CONTRACTOR/SELLER
- **10.1.2** The FPU CONTRACTOR/SELLER technical documentation shall include at least the following:
 - One Line diagram
 - Piping and Instrumentation Diagram (P&ID)
 - Interconnection Diagram
 - General arrangement of cabinet installation
 - General arrangement of all topside installation, including cable routing, mechanical details and equipment datasheet
 - Typical detail of installation at each SESDV slot showing at least junction box, conduits, cable tray (if applicable) connector, and fixation
 - Factory Acceptance Test Procedure/Reports
 - Acceptance and Performance test (TAP) Procedure/Reports

11 TESTS AND INSPECTIONS

- **11.1.1** With respect to Topside FATs:
- 11.1.1.1 The list of FATs of MONITORING SYSTEM, in addition to the FAT procedures themselves, shall be submitted for approval by PETROBRAS during the project detailing phase.
- 11.1.2 The factory tests program shall demonstrate that all components of MONITORING SYSTEM have been successfully installed and connected and that MONITORING SYSTEM is fully operational including external services (using simulators).

12 SESDV MONITORING SYSTEM SCOPES

12.1 FPU CONTRACTOR/SELLER responsibilities

- **12.1.1** Supply, install and interconnect corresponding cabinet for SESDV Monitoring system.
- **12.1.2** Provide transmission of dry contacts control from FPU ICSS data.
- **12.1.3** Provide a network connection to the SESDV Monitoring system.
- **12.1.4** Provide assistance to all activities to be performed by the SESDV CONTRACTOR aboard the FPU, including any crane operation, transportation of loads, heavy mechanical installations and issuance of work permits when needed.
- **12.1.5** Supply and run all deck and FPU ICSS cabling, including terminations.
- **12.1.6** Design, supply and install SESDV Electrical JBs & accessories, providing connections between deck cables and corresponding cabinet.
- **12.1.7** Provide documentation with all information needed for the design of the monitoring system, including but not limited to cabling information, wiring diagrams, area classification, mechanical, electrical interfaces and diving accessibility report.



TE	CHNICAL SPECIFICATION	[№] I-ET-3010.00-5524-85	4-PX9	9-001	REV.	0
JOB	SESDV MONIT	TORING SYSTEM	SHEET	15	of	17
TITLE	MONITORING OVOTEN FOR	DOLLDOEA EMEDOENOVO				

12.2 FPU OPERATOR responsibilities

- **12.2.1** Install umbilical hang off and support umbilical pull in operations.
- 12.2.2 Install umbilical electrical pigtails with cable glandes in SESDV Electrical JBs.

12.3 UMBILICAL CONTRACTOR responsibilities


12.3.1 Design, supply and install UTA and umbilical line.

12.4 SESDV CONTRACTOR responsibilities

- **12.4.1** Design, supply, install and interconnect SUBSEA equipment for SESDV Monitoring system.
- **12.4.2** Execute the fully commissioning of SESDV Monitoring system (offshore).
- **12.4.3** Provide information about calibration curves from the sensors to be updated on the supervisory system.



TE	CHNICAL SPECIFICATION	[№] I-ET-3010.00-5524-85	4-PX9	-001	REV.	0
JOB	SESDV MONIT	ORING SYSTEM	SHEET	16	of	17
TITLE	MONITORING OVOTEM FOR	OUDOEA EMEDOENOVO		214/1		

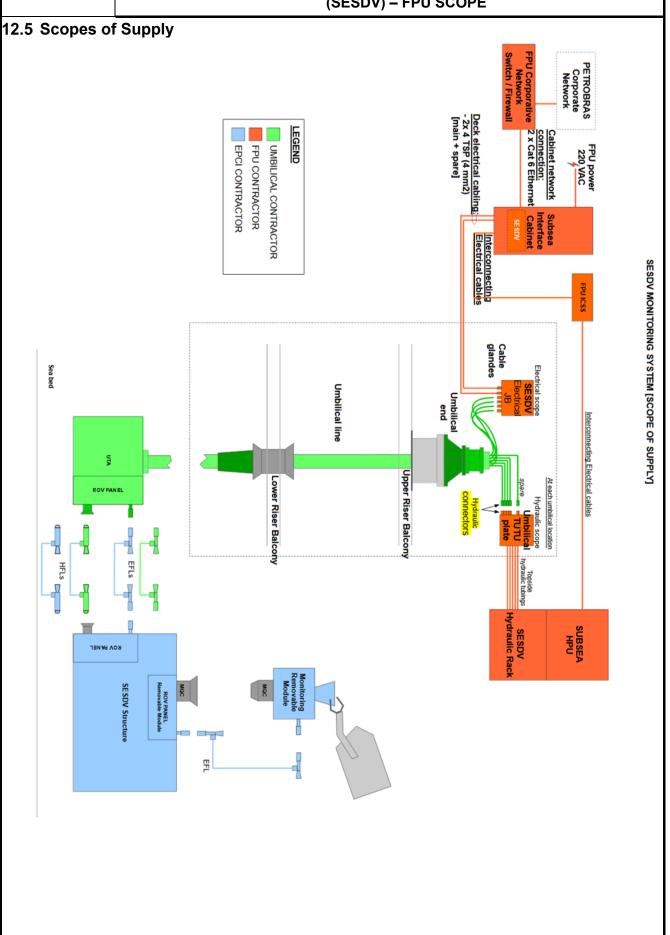



TECHNICAL SPECIFICATION IN I-ET-3010.00-5524-854-PX9-001 REV. 0

JOB SESDV MONITORING SYSTEM SHEET 17 of 17

MONITORING SYSTEM FOR SUBSEA EMERGENCY SHUT-DOWN VALVE (SESDV) – FPU SCOPE

