	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005
	CLIENT: SRGE	SHEET: 1 of 17
	JOB: TELECOMMUNICATION DATA	
	AREA: -	
TIC	TITLE: TOPSIDES WLAN SYSTEM	INTERNAL
		OI/CS

MICROSOFT WORD / V.2016 / I-ET-3010.00-5517-768-PPT-005_C.docx

INDEX OF REVISIONS

REV.	DESCRIPTION AND/OR REVISED SHEETS
0	ORIGINAL ISSUE
A	REVISED WHERE INDICATED
B	REVISED WHERE INDICATED
C	REVISED WHERE INDICATED

	REV. 0	REV. A	REV. B	REV. C	REV. D	REV. E	REV. F	REV. G	REV. H
DATE	ABR/01/22	OCT/25/2022	NOV/10/2022	JAN/30/2023					
DESIGN	PROJ-US	PROJ-US	PROJ-US	PROJ-US					
EXECUTION	Y3S7	Y3S7	Y3S7	Y3S7					
CHECK	CY22	CY22	CY22	CY22					
APPROVAL	X187	X187	X187	X187					

INFORMATION IN THIS DOCUMENT IS PROPERTY OF PETROBRAS, BEING PROHIBITED OUTSIDE OF THEIR PURPOSE


FORM OWNED TO PETROBRAS N-0381 REV. L



TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
AREA: -	SHEET: 2 of 17	
TITLE: TOPSIDES WLAN SYSTEM	INTERNAL	
	OI/CS	

INDEX

1. SUBJECT	3
2. ABBREVIATIONS	3
3. REFERENCE DOCUMENTS, CODES AND STANDARDS	3
4. GENERAL REQUIREMENTS	4
5. SYSTEM DEFINITIONS	6
6. TECHNICAL REQUIREMENTS	7
7. SCOPE OF SUPPLY.....	11
8. DIMENSIONING CRITERIA	12
9. COMMISSIONING	15
10. CONTRACTOR TECNICAL TEAM REQUIRMENTS	16
11. ASSEMBLY AND CONFIGURATION SYSTEM.....	17

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 3 of 17	
	TITLE: <p style="text-align: center;">TOPSIDES WLAN SYSTEM</p>	INTERNAL	
OI/CS			

1. SUBJECT

1.1 The subject of this document is to establish the criteria and basic characteristics for the detail design, supply, installation and commissioning of Wireless Local Area Network System (WLAN) that shall be installed in all Topside Modules of PETROBRAS FPSO Unit:


2. ABBREVIATIONS

ECD	Data Communications Equipment
MCO	Microcomputer (Workstation)
IMP	Printer
SW	Layer 2 Switch
PP	Patch Panel
PDD	Data Distributor Panel
DIO	Optical Internal Distributor
ROT	Router
TMD	Data Plug Socket
GK	Access Media Gateway (Gatekeeper)
OW	WAN optimizator
CP	WLAN controller
FW	Firewall
PA	WLAN access point
SW	Layer 3 Switch
SVR	Server
OTDR	Optical Time-Domain Reflectometer
WLAN	Wireless Local Area Network

3. REFERENCE DOCUMENTS, CODES AND STANDARDS

3.1 The detailed design shall be made, at least, in accordance with requirements of those International and National Standards listed below:

- a. ANATEL - Lei Nº 9.472, of 16 July 1997;
- b. ANSI/EIA/TIA 568-B2-1 – Commercial Building Telecommunications Cabling Standard;
- c. ANSI/EIA/TIA 568-B.2 – Balanced Twisted-Pair Cabling Components;
- d. ANSI/EIA/TIA 568-B.3 – Optical Fiber Cabling Components Standard
- e. IEC 61892 – Mobile and fixed offshore units – Electrical installations – All Parts;
- f. IEC 60079 – Explosive Atmospheres – All Parts;
- g. IEC 60092 – Electrical installations in ships – All Parts;
- h. IEC 60228 – Conductors of insulated cables;

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 4 of 17	
	TITLE: <p style="text-align: center;">TOPSIDES WLAN SYSTEM</p>	INTERNAL	
OI/CS			


- i. IEC 60331 – Fire-resisting characteristics of electric cables;
- j. IEC 60332 – Flame-retardant characteristics of electric cables;
- k. IEC 62444 – Cable glands for electrical installations;
- l. IEC 60529 – Degrees of Protection Provided by Enclosures (IP Code);
- m. IEEE 802.11 standards in various versions (versions "a" through "n");
- n. 802.11 ac - standards in 802.11 providing 5 GHz band, retroactively labelled as Wi-Fi 5;
- o. 802.11 ax - standards in 802.11 is designed to operate in all band spectrums between 1 and 7 GHz, marketed as Wi-Fi 6;
- p. IEEE 802.11 i – Wi-Fi Protected Access 2 (WPA2), WPA;
- q. IEEE 802.3 af - Standard specifies Power over Ethernet (PoE), also Power over LAN (PoL);
- r. IEEE 802.3 at - Standard specifies Power over Ethernet Plus (PoE+), also knowledge to Power over LAN (PoL);
- s. INMETRO/Portaria nº 179, May 18th 2010 and its annexes;
- t. NFPA 70 – National Electrical Code;
- u. NFPA 72 – National Fire Alarm and Signaling Code;
- v. NFPA 76 - Standard for the Fire Protection of Telecommunications Facilities
- w. OSHA Rules - Occupational Safety and Health Administration

3.2 Brazilian Standards


- a. INMETRO PORTARIA Nº 115 (21/MARÇO/2022): Regulamento de Avaliação da Conformidade de Equipamentos Elétricos para Atmosferas Potencialmente Explosivas, nas Condições de Gases e Vapores Inflamáveis e Poeiras Combustíveis.
- b. NR-10: Segurança em Instalações e Serviços em Eletricidade.
- c. NR-37:Segurança e Saúde em Plataformas de Petróleo.

4. GENERAL REQUIREMENTS

- 4.1 CONTRACTOR shall provide all the materials to install all equipment, accessories, cables and infrastructure that compound the TOPSIDES WLAN System.
- 4.2 CONTRACTOR shall elaborate the Calculation Report for WLAN System, in accordance with Standards listed herein and this PETROBRAS technical specification requirement.

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 5 of 17	
	TITLE: <p style="text-align: center;">TOPSIDES WLAN SYSTEM</p>	INTERNAL	
OI/CS			


- 4.3 Electrical installations, equipment and materials shall comply with the requirements of IEC 60079, IEC 61892-7 and Classification Society.
- 4.4 All equipment, installations and materials shall be type approved and certified by international recognized laboratory and shall be in accordance with INMETRO Portaria nº 115, March 21st 2022 and its annexes.
- 4.5 CONTRACTOR shall provide the structured cabling network points for all WLAN Access Point (PA) in accordance with Technical Specification TOPSIDE STRUCTURED CABLING NETWORK.
- 4.6 For PETROBRAS detailed project requirements, Installation, Configuration, Tests training and Commissioning CONTRACTOR shall be complied with the DESCRIPTIVE MEMORANDUM I-MD-3010.00-5510-760-PPT-001 – GENERAL CRITERIA FOR TELECOMMUNICATIONS DESIGN.
- 4.7 For telecommunications symbols, the Detailed Design shall comply with the Technical Specification: I-ET-3000.00-0000-940-P4X-002 – SYMBOLS FOR PRODUCTION UNITS DESIGN.
- 4.8 For telecommunications TAGs, the Detailed Design shall comply with the Technical Specification: I-ET-3000.00-1200-940-P4X-001 – TAGGING PROCEDURE FOR PRODUCTION UNITS DESIGN.
- 4.9 All electrical requirements for telecom package shall be in accordance with I-ET-3010.00-5140-700-P4X-003 – ELETRICAL REQUIREMENTS FOR PACKAGES FOR OFFSHORE, I-ET-3010.00-5140-700-P4X-001 - SPECIFICATION FOR ELECTRICAL DESIGN FOR OFFSHORE UNITS, I-DE-3010.00-5140-700-P4X-003 - GROUNDING INSTALLATION TYPICAL DETAILS and I-ET-3010.00-5140-700-P4X-005 - REQUIREMENTS FOR HUMAN ENGINEERING DESIGN FOR ELECTRICAL SYSTEMS OF OFFSHORE UNITS.
- 4.10 The equipment and accessories shall attend the ingress protection degree, protection type, classifications zone and groups established by IEC / ABNT.
- 4.11 CONTRACTOR shall supply all equipment, cables, accessories and its must be approved and certificated by Classifying Society and technical conformity with the International and National standardization organism: ABNT, IEC and INMETRO.
- 4.12 The equipment and materials shall be supplied packed suitable for long periods of storage and be protected against mechanical impact and adverse weather conditions.
- 4.13 Safety Grounding of telecommunication panels enclosure shall be according to I-ET-3010.00-5140-700-P4X-001 - SPECIFICATION FOR ELECTRICAL DESIGN FOR OFFSHORE UNITS." Grounding by simply supporting the casing on the steel structure of the FPSO shall not be acceptable.
- 4.14 Equipment and accessories shall be specified, built and assembled using non-combustible, non-corrosive and mechanically rigid materials.

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 6 of 17	
	TITLE: <p style="text-align: center;">TOPSIDES WLAN SYSTEM</p>	INTERNAL	
OI/CS			

- 4.15 When designing a junction box, its size and shape shall be chosen taking into account the devices it will house and what else may be added in future, in order to enable easy maintenance even after future expansion.
- 4.16 When drilling holes in boxes for incoming and outgoing cables by means of cable glands, care shall be taken to refrain from drilling more holes than it is necessary and, if in fact this may occur, the extra holes shall be closed with plugs.
- 4.17 All grounding bus bars shall be of tin-plated copper and painted with green strips.
- 4.18 All connections to the grounding network for equipment and junction boxes shall be made by means of bolted or welded terminals.
- 4.19 In order to avoid humidity and water ingress inside the boxes, CONTRACTOR shall apply appropriate material in the screw thread, bolts, cable glands, cover plugs and joints, according to IEC 60079 and IEC 60529.
- 4.20 The boxes shall have the cable glands installed facing lateral sides and/or bottom side. Cable glands installed facing upward are not acceptable. It is also not acceptable any opening facing the upward of the box, even if it is closed by cover plug.
- 4.21 CONTRACTOR shall ensure by inspection of a qualified personnel that all equipment installations are according to the IEC/ABNT standards requested in this technical specification.
- 4.22 The equipment and materials shall be supplied packed suitable for long periods of storage and be protected against mechanical impact and adverse weather conditions.

5. SYSTEM DEFINITIONS

- 5.1 The Topside WLAN System shall be defined as a complementary network access to PETROBRAS Corporative network on Topside Enclosed Modules and Topside Industrial Areas.
- 5.2 All transmitter radios and appliances, if applicable, shall be certified in accordance with ANATEL Standards and CONTRACTOR shall provide all necessaries licenses to regular operating in Brazil.
- 5.3 For all equipment proposed, it shall be ensured, by CONTRACTOR, that all items do not have an EoS/EoL warning issued by the manufacturer.
- 5.4 CONTRACTOR shall consider some requirements on own energy power Detailed Design to feed Access Point (PA):
- a. It shall be fed, mainly, by PoE (IEEE 803.3 af) or PoE+ (IEEE 803.3 at), always if is possible;
 - b. If it is not possible, it shall be fed by the 220 VAC from UPS switchboard panel.

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 7 of 17	
	TITLE: TOPSIDES WLAN SYSTEM	INTERNAL OI/CS	

5.5 All Access points installed in topsides modules shall use the WLAN controller installed in Telecommunication Room on the Accommodation Module.

5.6 Both cranes' areas end cabins shall be covered by Access Points installed in Topsides.

6. TECHNICAL REQUIREMENTS

6.1 Equipment and accessories installed in outdoor or industrial areas shall be suitably rugged and their external bodies shall be made in non-metallic material, suitable for harsh environments and in accordance with IEC and ABNT standards, apart from the ones whose classification area require to be metallic as Ex-d junction boxes.

6.2 Brackets, bolts, nuts, washers and any other mechanical fixing elements shall be made in stainless steel.

6.3 In case of difficulty for supplying some accessory with external body made with non-metallic materials, it will be necessary to submit them for analysis and approval of PETROBRAS.

6.4 It shall be avoided equipment and accessories with their external bodies built in aluminum alloy. Anything different shall be submitted to PETROBRAS approval. In case of approval, this alloy shall not contain in its composition more than 0.25 % of copper and shall comply with the ASTM-B-179 standard (ANSI alloy 356.1).

6.5 In outdoor areas, exposed to marine atmosphere, CONTRACTOR shall avoid the galvanic corrosion of equipment, antennas, panels, boxes, coaxial cables and fixing accessories. Galvanic insulation shall be implemented wherever contact between different metallic materials is needed.


6.6 Equipment and materials shall be supplied and installed with all threads, hinges, bolts, cover plugs, cable glands and flanges lubricated with anti-seize (loctite) or similar grease.

6.7 Equipment and materials shall be supplied with cable passage holes sealed with plastic plugs in the holes to be used and definitive plugs (made of the same material as the equipment and accessories) in the reserve holes.

6.8 Electrical equipment installed in external areas, foreseen to operating during emergency shutdown ESD-3 shall be certified for installation in hazardous areas Zone 2 Group IIA temperature T3.

6.9 Detailed engineering of design shall be render feasible through strategic installation of components, so as to minimize the number of connections and thus optimize costs of materials and/or work to be done.

6.10 Equipment, cables, boxes, materials and accessories for installation in the industrial areas (outdoor or indoor) of unit shall be specified and assembled taking into account the adverse operating conditions on FPSO such as:

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 8 of 17	
	TITLE: <p style="text-align: center;">TOPSIDES WLAN SYSTEM</p>	INTERNAL	
OI/CS			

- a. Atmosphere with high content of humidity, salts hydrocarbons and other corrosive factors;
- b. Environment subject to the presence of explosive gases shall be in accordance with Hazardous area classification;
- c. Exposure to weather conditions (sun and rain) and maritime atmosphere;
- d. Air temperature: From -10°C up to +50°C;
- e. Air Humidity: 95%.

6.11 CONTRACTOR shall ensure for wireless devices connected to WLAN System at least the thresholds values informed below. These values shall be confirmed on the site survey and the Calculation Report used in the detailed design.

- a. WLAN frequency band standard: 2.4 GHz and 5.8 GHz;
- b. Minimum rate transmission (throughput) of 24 Mbps;
- c. Signal-to-noise Ratio Min (S/N): 25.0 dB

6.12 PETROBRAS will send to CONTRACTOR, during the detailed design, the following information:

- a. Client IP address range;
- b. APs IP address range;
- c. DHCP scope and definitions;
- d. VLANs ID;
- e. SSID;
- f. WLAN security definitions;
- g. management interface info;
- h. NTP server IP address.

6.13 CONTRACTOR shall consider all equipment will be installed and utilized in Brazil territory ("Country Code" = Brazil).

6.14 The Indoor Access Points shall not have external antennas.

6.15 Following below the technical specifications of each appliances.

6.15.1. Indoor Access Point – Enclosed Module:

- a. Manufacturer: CISCO System

TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
AREA: -	SHEET: 9 of 17	
TITLE: TOPSIDES WLAN SYSTEM	INTERNAL	
	O/CS	

- b. Model: Cisco catalyst 9130AX Access Points, or the newer model indicated by the manufacturer to replace it in case of EoL/EoS announcement;
- c. Antenna: It shall be Internal Antenna - 2.4 GHz/5 GHz;
- d. Pattern: IEEE 802.11 ax

6.15.2. Outdoor Access Point – Industrial and External Areas

- a. Manufacturer: CISCO System
- b. Model: Cisco Catalyst 9124AX Series Outdoor Access Point, or the newer model indicated by the manufacturer to replace it in case of EoL/EoS announcement;
- c. Antenna: External Dual-Band Omnidirectional Antennas or external Dual-Band Directional Antennas as per coverage required;
- d. Minimum gain for omni: 4 dBi @2.4GHz and 7 dBi @5.0GHz;
- e. Pattern: 802.11 ax


6.15.3. Minimum requirements for enclosure to be used in industrial areas

- a. Type of Protection: in accordance with requirements for installed environment;
- b. EX Zone 1
- c. Gas Group: IIA;
- d. Ingress Protection: IP-66.

6.15.4. For reference, see some figures to illustrate the WLAN Access Point mounted in enclosure to install in Topside Industrial Areas or External Areas (Main Deck).



Figure 1: Examples of Access Points for external areas

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 10 of 17	
	TITLE:	TOPSIDES WLAN SYSTEM	
			INTERNAL O/CS

6.16 Fiber Optic

- 6.16.1. All external Access points shall be installed with fiber optic cable
- 6.16.2. For connect the Access Point it can be used a PoE media converter or direct optical connection.
- 6.16.3. The quantity of fiber optic pairs inside each cable shall be enough to each Access Point to be activated plus 04 (four) fiber optic fibers (02 pairs) as spare ending in Junction Box and data rack.
- 6.16.4. All fibers shall be terminated inside the junction box in mini optic distributor.

6.17 Junction Box

- 6.17.1. It shall be foreseen 01 (one) junction box for each external access point or for a group of access points.
- 6.17.2. This junction box shall be installed as close as possible of the access point
- 6.17.3. This junction box will interconnect the 220 VAC/UPS power cable and the fiber optic cable to access point.
- 6.17.4. The AC power cable shall be terminated in SAK terminals.
- 6.17.5. The fiber optics shall be terminated in mini optic distributor with SC connector.
- 6.17.6. It shall be foreseen 02 (two) holes as spare, for future expansion.



Junction Box



SAK terminal




Mini Optic distributor

Figure 2: JB and internal details for reference

6.18 Ethernet/Optical Multimode Converter – Standalone

- a. Electrical Interface – 100/1000BASE-TX 8P8C (RJ-45) with IEEE 802.3bt PoE.
- b. Optical interface - Multimode G.651.
- c. Core diameter - 50µm.
- d. Standard – 100/1000BASE-FX.

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 11 of 17	
	TITLE:	TOPSIDES WLAN SYSTEM	
			INTERNAL OI/CS

- e. Number of fibers - 2 fibers.
- f. Installation – Standalone box.
- g. Connector – SC.
- h. Operating temperature -10°C to + 50°C.
- i. Power Source: 220VAC.
- j. Link failure pass-through.
- k. Auto MDI / MDI-X for TX port.

7. SCOPE OF SUPPLY

- 7.1 CONTRACTOR shall supply the quantity of Access Point necessary to assure full WLAN covering and technical requirements specified on this technical document.
- 7.2 CONTRACTOR shall be responsible to supply, install, configure, test and commissioning the WLAN System in PETROBRAS FPSO Unit, within the scope of the Contract and in accordance with this Technical Specification that shall be compound, at least, by:
- a. The number of Indoor Access Point applied in internal areas of some topside modules shall be defined though the calculation report issued by CONTRACTOR during the detailed design and approved by PETROBRAS;
 - b. The number of outdoor Access Point applied in topside Industrial Areas, shall be defined though the calculation report issued by CONTRACTOR during the detailed design and approved by PETROBRAS;
 - c. The minimum number of Indoor Access Point and outdoor Access Point provided shall be the number foreseen in in WLAN arrangement and online drawings issued.
 - d. Supports, accessories, installation materials, junction boxes, cables and others in accordance with manufacturers requirements.
- 7.3 In addition, CONTRACTOR shall supply all accessories and materials necessaries to correct installation of WLAN System.
- 7.4 Every warranty, license and services purchased from CISCO manufacturer shall be transferred to Petrobras Smart Account (SA), which ID is tic.petrobras.com.br. From other vendors, whenever required, it shall be done and assessed with PETROBRAS.

8. DIMENSIONING CRITERIA

- 8.1 CONTRACTOR shall ensure WLAN signal covering in all Topside Modules and Industrial Areas, including internal areas.
- 8.2 CONTRACTOR shall use the Ekahau Site Survey Pro, version 9.0.3, or TamoGraph Site Survey Pro, version 6.0. (Build 241) or better as the Wifi Coverage Prediction Software for elaborate the WLAN Calculation Report coverage. Any other Coverage Prediction Software shall be approved by PETROBRAS.

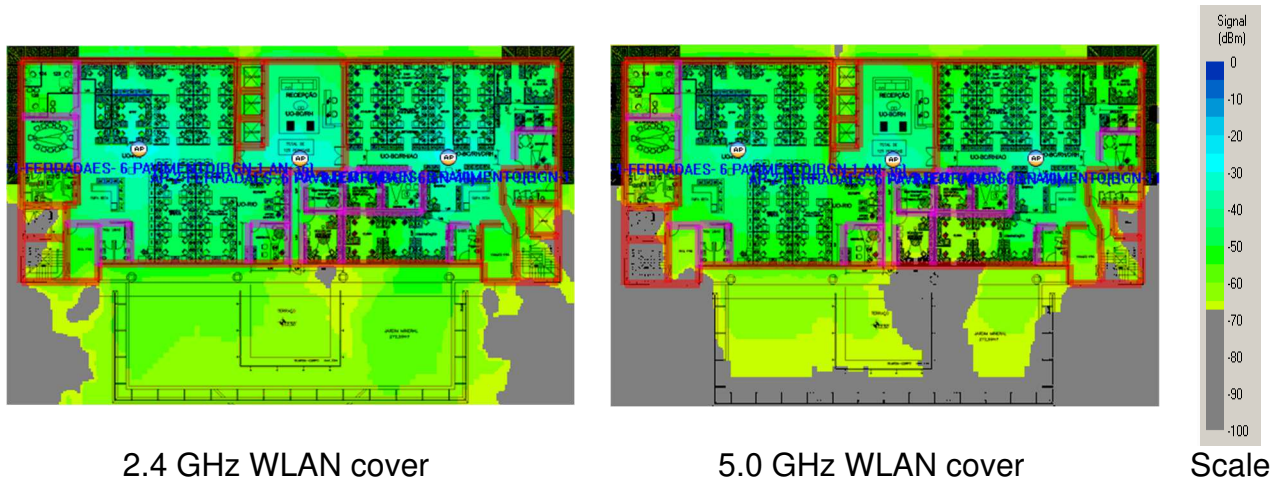


Figure 3: software survey for reference

- 8.3 CONTRACTOR shall consider the following WLAN detailed design requirements for 2.4 GHz and 5 GHz:

a. Minimum AP signal strength required	- 55 dBm
b. Minimum AP PHY Data Rate required - Uplink	54,00 Mbps
c. Minimum AP PHY Data Rate required - Downlink	54,00 Mbps
d. Signal Noise Ratio required	25 dBm
e. Maximum Noise Level Desired	- 90 dBm
f. 40 MHz Channel Width	Allowed
g. 20 MHz Channel Width	Allowed
h. 80 MHz Channel Width	Allowed
i. 160 MHz Channel Width	Allowed

- 8.4 CONTRACTOR shall connect all Access Point to Telecommunications racks as illustrated at the figure below.

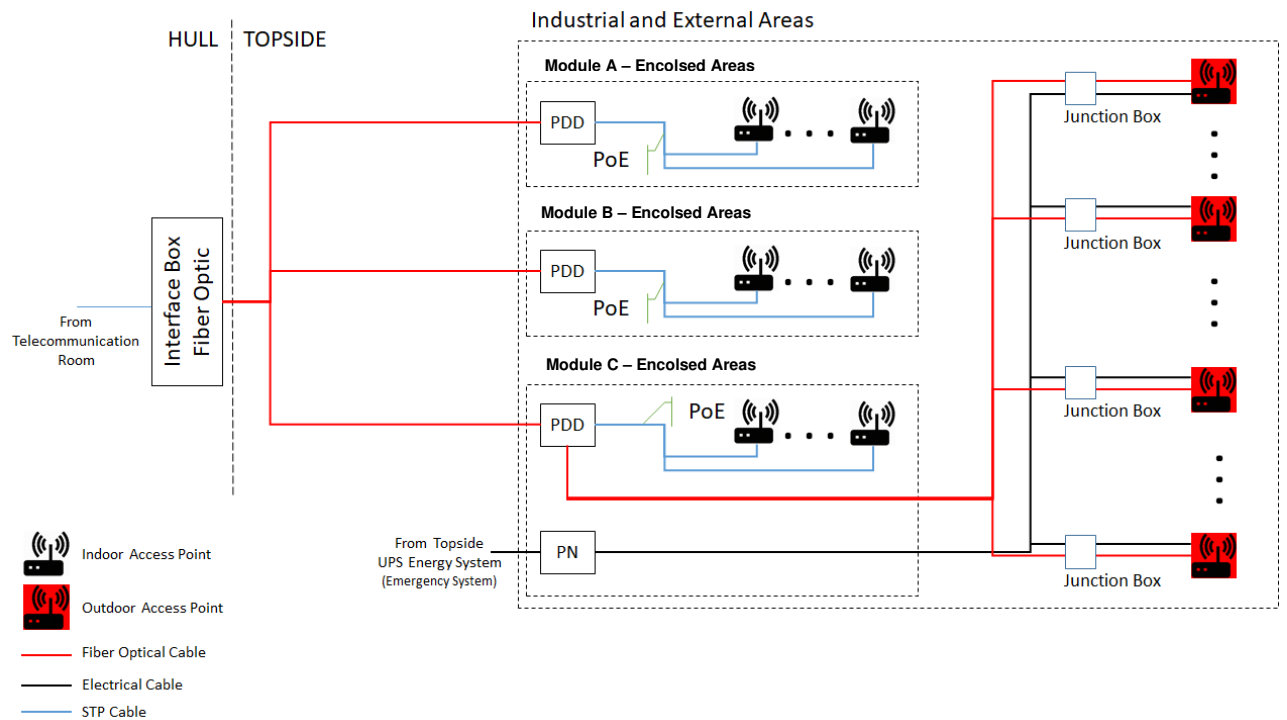


Figure 4: APs schematic connections

8.5 Follow an example of a preliminary survey, of a previous basic design, using the Ekahau Wifi Coverage Prediction Software to define the WLAN coverage in 2.4GHz and 5GHz and the number of Access Points of topside modules.

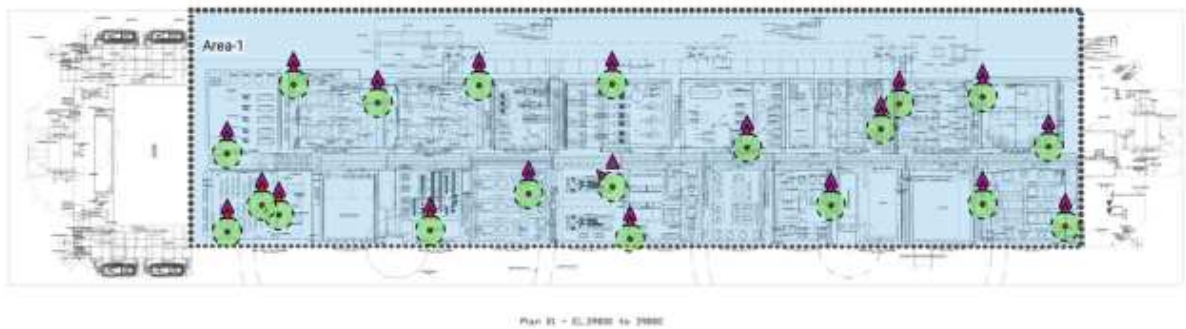


Figure 5: APs location by survey as reference

Area-1 (21,795.8 m²)		
Coverage Requirement: Voice + Data	Signal Strength Min	-67.0 dBm
	Signal-to-noise Ratio Min	20.0 dB
	Data rate Min	20 Mbps
	Number of Access Points Min	2 at min. -75.0 dBm
	Channel Overlap Max	2 at min. -85.0 dBm
	Round Trip Time (RTT) Max	200ms
	Packet Loss Max	2.0 %
Capacity Requirement	No capacity devices for this area	

Figure 6: survey measurement as reference

8.5.1. Signal strength on 2.4 GHz band

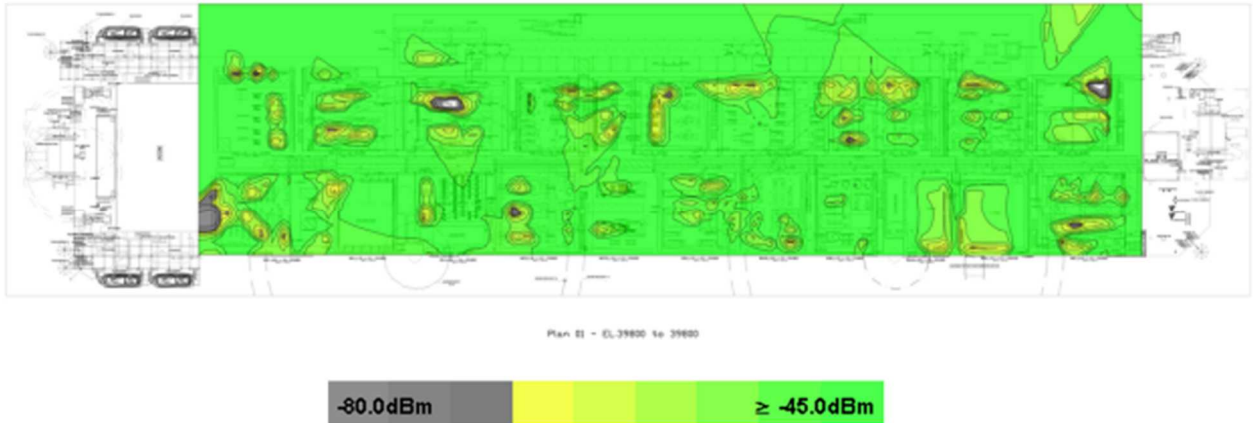


Figure 7: Signal strength on 2.4 GHz band example

8.5.2. Signal strength on 5 GHz band

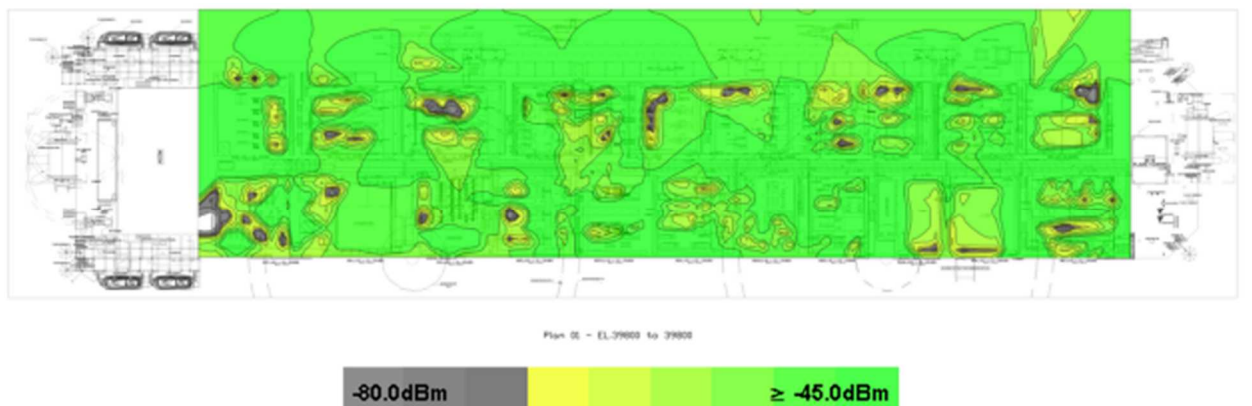



Figure 8: Signal strength on 2.4 GHz band example

8.6 For this WiFi study, previous experiences indicate that the attenuation of construction materials or type of walls should be based on these references below:

- a. Floor level attenuation: 30dB
- b. Outer Walls (Red): 33dB
- c. Outer Walls (Brown): 13dB
- d. Metal Structures (Grey): 33dB
- e. Metal structures (Green): 31dB
- f. Cubicle (Blue): 35dB
- g. Heavy Wall (light Pink): 8dB

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 15 of 17	
	TITLE: <p style="text-align: center;">TOPSIDES WLAN SYSTEM</p>	INTERNAL	
OI/CS			

h. Dry Walls (Pink): 4dB

i. Cinder Walls (light blue): 4dB

9. COMMISSIONING

9.1 CONTRACTOR shall be responsible to realize a technical commissioning activity, check, test and evaluate the operation of equipment, panels, installations and wireless covering, in order to permit their use under normal operating conditions.

9.2 A technician with professional level certified by the manufacturer of the WLAN equipment provided shall perform the Installation, configuration and Commissioning activities.

9.3 The following verifications shall be scope of commissioning activities in accordance with Contract and this Technical Specification.

- a. Check hardware and network environments;
- b. Basic commissioning: After checking the physical environment of the products, check whether, the basic information such as software system, license, and system time is correct, ensuring that the site is running properly.
- c. After checking physical environments, check basic information for accuracy. The basic information includes the software system, licenses, and system time. This ensures that the local equipment works properly and suits interconnection commissioning.
- d. Device check: Check devices to ensure that the device status meet deployment requirements and prepare for access commissioning and basic service commissioning.
- e. Configuring an user to log into the device remotely: This operation enables a user to remotely log in to the device in the central equipment room to deploy services.
- f. Configure a SSID for tests purposes and measurements of power and throughput.

9.4 CONTRACTOR shall follow the verifications and commissioning activities in accordance with Contract documents and this Technical Specification.

9.5 CONTRACTOR shall use the WLAN Site Survey software and accessories to prove the coverage attendance.

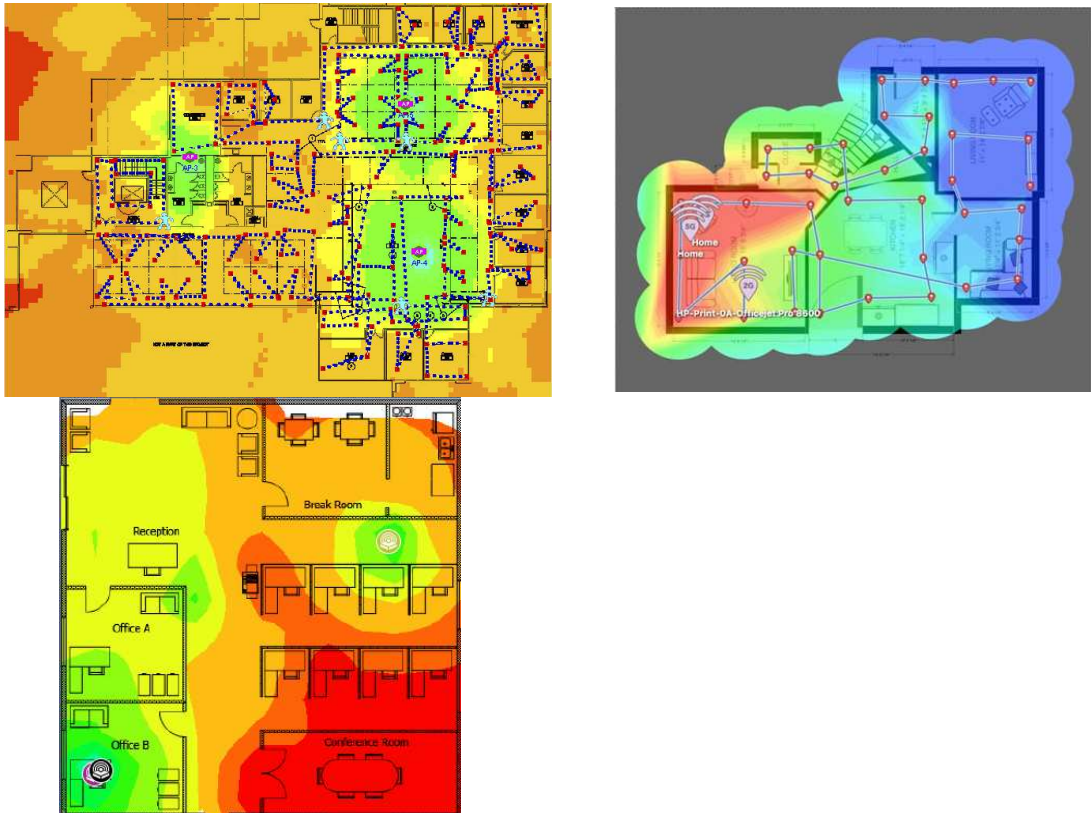


Figure 9: Site Survey software for reference


9.6 CONTRACTOR shall submit a Site Survey report for PETROBRAS analysis and approval.

9.7 As a matter of general acceptance, it shall be considered: equipment delivered; powered; configured with Petrobras corporate parameters; remotely accessed; interconnected among them; configured on Petrobras management network; service coverage attended all around the vessel, tested with mobile devices in the vessel.

10. CONTRACTOR TECHNICAL TEAM REQUIREMENTS

10.1 CONTRACTOR shall dispose professionals and teams with the profiles listed below, to meet the quality of the technical service and the deadlines agreed with PETROBRAS.

10.2 Technical team: Professional with WLAN intermediate manufacturer certification with minimum experience of two years in WLAN projects. Responsible for coordinating the teams and validating the project, the assembly and the configurations of the equipment.

	TECHNICAL SPECIFICATION	Nº: I-ET-3010.00-5517-768-PPT-005	REV. C
	AREA: -	SHEET: 17 of 17	
	TITLE: <p style="text-align: center;">TOPSIDES WLAN SYSTEM</p>	INTERNAL	
OI/CS			

11. ASSEMBLY AND CONFIGURATION SYSTEM

- 11.1 The assembly and configuration consisting in execution of all the necessary activities for put the WLAN network in operation following all requirement of this technical specification.
- 11.2 The assembly and configuration phase shall be started after analysis, comments and approval by PETROBRAS of all the documentation that composes the detailed design and configuration plan issued by the CONTRACTOR.
- 11.3 PETROBRAS considers the assembly and configuration activity subdivided into the following stages:
- 11.3.1. Mechanical assembly: placement and fixation of the equipment, materials and cables that compose the system in the respective places and under the conditions provided by the detailed design.
 - 11.3.2. Interconnection: all electrical, signal and ground connections between the equipment and materials that compose the system and the existing associated systems, including interconnections in the electrical panels.
 - 11.3.3. Energization: activation of the electrical supply of the equipment that compose the system.
 - 11.3.4. Configuration: execution of all programming tasks, by software and hardware (if necessary) to initialization and customization of each equipment within the specified technical characteristics, comprising:
 - a. Initial and basic configuration for access permission and physical interconnections.
 - b. Advanced configuration, including all parameters required by WLAN network.
 - c. Local tests: execution of all necessary tasks for the placement and verification of each equipment, which composes the WLAN.