



PETROBRAS

TECHNICAL SPECIFICATION No.: I-ET-3A36.00-1000-941-PPC-001 Rev.F

User: E&P/DP

Sheet: 1 of 129

Project: NORTHERN SANTOS BASIN PRE-SALT FIELDS

Evs: 0612 / 0614

Unit: PRODUCTION SYSTEMS AND UNITS

CENPES

METOCEAN DATA

INDEX OF REVISIONS

REV.	DESCRIPTION AND / OR AFFECTED SHEETS
0	ORIGINAL
A	UPDATED SEA WATER CHARACTERISTICS (ITEM 7). INCLUDED WAVE SPREADING FORMULATION (ITEM 5.4). THE PROJECT NAME WAS CHANGED FROM FRANCO TO BUZIOS FIELD.
B	UPDATED CURRENT DATA (ITEM 6)
C	UPDATED HEADER TO INCLUDE NORTHERN SANTOS BASIN PRE-SALT FIELDS. UPDATED TABLES 3.5.1, 5.1.1 to 5.1.17 TO INCLUDE SIMULTANEOUS WAVE, WIND AND NEAR SURFACE CURRENTS EXTREME CONDITIONS.
D	INCLUDED NOTICE ABOUT DOCUMENT PROPERTY
E	UPDATED TABLE 3.5.2
F	INCLUDED TABLE 7.4

Notice: The data, drawings, specifications, operation parameters, methodologies and, in general, all information contained in this document are property and/or are under legitimate use of Petróleo Brasileiro S.A. — PETROBRAS, and were prepared with reserved and / or confidential data. The use of this information is prohibited for any other purpose that has not been expressly contracted and / or previously authorized in writing by PETROBRAS. Likewise, unless previously authorized in writing by PETROBRAS, it is prohibited to copy, reproduce, adapt, translate, display and disclose: i) all or part of this document, and ii) any included information. The improper use or disclosure of this document, and any information it contains, may characterize crime of unfair competition, under the terms of Law No. 9.279 / 96, art. 195, XI, and give rise to sue for compensation of material and moral damages arising from the same fact.

Nota: Os dados, desenhos, especificações, parâmetros de operação, metodologias e, de modo geral, todas as informações contidas neste documento são de propriedade e/ou estão sob a posse legítima da Petróleo Brasileiro S.A. — PETROBRAS, e foram elaborados com dados de natureza reservada e/ou confidencial. Fica proibido o uso dessas informações para quaisquer outros fins que não tenham sido expressamente contratados e/ou previamente autorizados por escrito pela PETROBRAS. Do mesmo modo, salvo se previamente autorizadas por escrito pela PETROBRAS, fica proibida a cópia, reprodução, adaptação, tradução, exposição e divulgação: i) deste documento, no todo ou em partes, e ii) das informações nele contidas. O uso ou divulgação indevida deste documento e das informações que ele contém poderá caracterizar crime de concorrência desleal, nos termos da lei n.º 9.279/96, art. 195, XI, e dar ensejo a pedido de indenização por danos materiais e morais decorrentes do mesmo fato.

	ORIGINAL	REV. A	REV. B	REV. C	REV. D	REV. E	REV. F	REV. G	REV. H
DATE	15/07/2013	10/11/2014	14/06/2017	20/04/2018	12/07/2018	25/09/2020	21/07/2021		
EXECUTION	GUISELA	JAMLIMA	JAMLIMA/GFM	JAMLIMA	WCB	BX23	RTQL		
VERIFICATION	JAMLIMA	GUISELA	WCB	ERIC	JAMLIMA	BX22	CTXJ		
APPROVAL	MAURO	VINICIUS	ARTHUR	ARTHUR	ARTHUR	CXVE	A7OQ		

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 2 of 129

Title: METOCEAN DATA

INDEX

1. OBJECTIVE..... 3

2. SYSTEM OF UNITS AND DIRECTION CONVENTION 4

3. METEOROLOGICAL DATA 5

 3.1 ATMOSPHERIC PRESSURE 5

 3.2 RELATIVE HUMIDITY 5

 3.3 RAINFALL 5

 3.4 AIR TEMPERATURE, CHARACTERISTICS MONTHLY VALUES (°C) 6

 3.5 WIND..... 7

4. TIDAL DATA 10

5. WAVE DATA 11

 5.1 EXTREME SINGLE PEAK WAVE CRITERIA 11

 5.2 EXTREME DOUBLE PEAK WAVE CRITERIA 28

 5.3 JONSWAP WAVE SPECTRUM FOR SANTOS BASINS AND RELATION TZ / TP 38

 5.4 WAVE SPREADING FORMULATION FOR BUZIOS AREA 39

 5.5 DISTRIBUTION OF TOTAL SIGNIFICANT WAVE HEIGHTS AND WAVE POWER..... 40

 5.6 DISTRIBUTION OF SINGLE AND DOUBLE-PEAK SEA STATES 43

6. CURRENT DATA 76

 6.1 JOINT DISTRIBUTION OF CURRENT SPEED AND DIRECTION AT SPECIFIC LEVELS 77

 6.2 EXTREME CURRENT PROFILE 86

 6.3 CURRENT PROFILES FOR FATIGUE ANALYSIS..... 99

7. SEA WATER CHARACTERISTICS..... 125

 7.1 TABLE WITH VERTICAL DISTRIBUTION OF SEA WATER TEMPERATURE 125

 7.2 TABLE WITH VERTICAL DISTRIBUTION OF SEA WATER SALINITY 126

 7.3 VERTICAL PROFILE OF MARINE FOULING (MM) 127

 7.4 TABLE WITH VERTICAL DISTRIBUTION OF SEA WATER DENSITY 128

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 3 of 129

Title: METOCEAN DATA

1. OBJECTIVE

To present metocean data (meteorological and oceanographic parameters) to be used in the design of offshore units and production systems at northern Santos Basin Pre-Salt fields, offshore Brazil.



Figure 1 – Map of Northern Santos Basin Pre-Salt fields, offshore Brazil.

STATEMENT

PETROBRAS and the authors make no warranties, expressed or implied, as to any matter whatsoever, concerning the unappropriated use of this metocean document for any particular design purpose. PETROBRAS and the authors shall not be liable for any direct or indirect, consequential or non-consequential, or other damages and failures resulting from the unappropriated use of this metocean document.

EIW1 2022-02-07T18:22:29



PETROBRAS

2. SYSTEM OF UNITS AND DIRECTION CONVENTION

The International System of Units (S.I.), UNESCO-IOC (Intergovernmental Oceanographic Commission) and WMO (World Meteorological Organization) recommendations were adopted.

WIND and WAVES: direction indicates where the wind and waves comes from (origin at True North, clockwise sense).

CURRENT: direction indicates where the current goes to (origin at True North origin, clockwise sense).

Regarding the numeric values for cardinal directions: zero (0°) is associated with North direction, twenty two point five (22.5°) is associated with North-Northeast direction, forty five (45°) is associated with Northeast direction, sixty seven point five (67.5°) is associated with East-Northeast direction, ninety (90°) is associated with East direction, and so on, as used in a nautical chart compass rose (Figure 2 below).

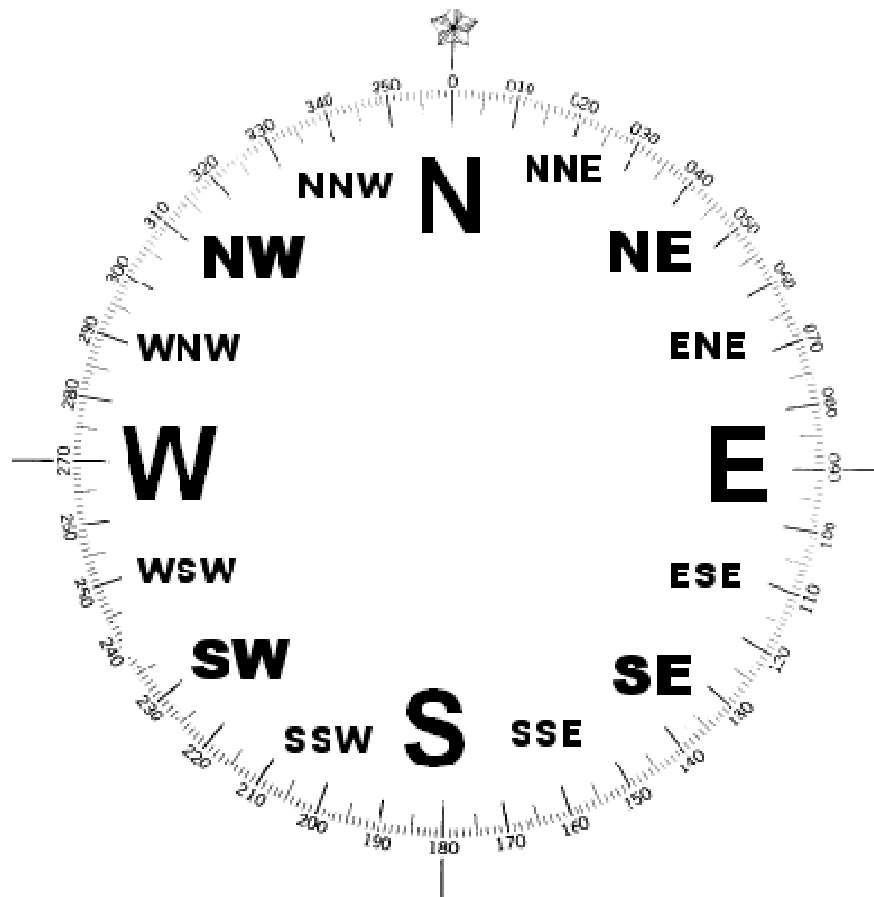


Figure 2 – Compass rose (numeric values associated with each direction)

EIWI 2022-02-07T18:22:29



PETROBRAS

3. METEOROLOGICAL DATA

3.1 Atmospheric Pressure

Absolute minimum : 999 hPa
 Mean : 1015 hPa
 Absolute maximum : 1035 hPa

Mean monthly values

JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEZ
1012	1013	1013	1015	1016	1018	1019	1018	1018	1015	1013	1011

SOURCE: Measured data in Merluza field, Santos Basin in the period from 2005 to 2011 and RT/MC 041/2006.

3.2 Relative Humidity

Mean annual value: 76.5 %

Mean Monthly Values

JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEZ
80.4	78.3	76.6	72.4	70.6	73.4	76.3	77.2	76.7	79.3	77.9	79.3

SOURCE: Measured data in Merluza field, Santos Basin in the period from 2005 to 2011.

3.3 Rainfall

3.3.1 Extreme Rainfall Values by Return Period and Duration (millimeters)

RETURN PERIOD	DURATION (HOURS)									
	0.08	0.25	0.5	1	2	4	8	12	24	
1	11.2	21.1	28.2	35.9	43.9	52.3	61.2	66.7	77.2	
2	13.0	24.6	33.3	41.9	51.7	61.9	72.4	79.1	91.0	
10	16.8	32.6	45.3	57.0	71.4	86.6	101.8	111.5	126.7	
20	18.4	36.0	50.6	64.2	80.9	98.7	116.1	127.4	143.9	
30	19.3	38.0	53.7	68.6	86.8	106.2	125.1	137.3	154.6	
50	20.4	40.5	57.8	74.3	94.6	116.3	137.0	150.6	168.9	
100	22.0	44.0	63.4	82.7	106.0	131.0	154.6	170.1	189.8	

SOURCE: Otto Pfafstetter, "Chuvas Intensas no Brasil", 1982 (Station: Campos).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **6 of 129**

Title: **METOCEAN DATA**

3.4 Air Temperature, Characteristics Monthly Values (°C)

Absolute maximum : 33.1
Mean : 23.9
Absolute minimum : 11.3

MONTH	MINIMUM	MEAN	MAXIMUM
JAN	25.1	26.2	27.6
FEB	25.4	26.5	28.1
MAR	25.4	26.6	28.4
APR	24.4	25.7	27.6
MAY	22.5	23.7	25.3
JUN	21.0	22.1	23.5
JUL	20.4	21.4	22.8
AUG	20.4	21.5	23.0
SEP	20.7	21.8	23.1
OCT	21.7	22.6	24.0
NOV	23.0	24.1	25.4
DEC	24.4	25.5	27.0

OBSERVATION: MINIMUM is equal to the mean of minimum daily values
MAXIMUM is equal to the mean of maximum daily values

SOURCE: Measured data in Merluza and Coral fields, Santos Basin in the period from 2005 to 2011.

EIW1 2022-02-07T18:22:29



PETROBRAS

3.5 Wind

The wind values are referenced to 10 meters above mean sea level and 10-minute or 1 hour duration.

Transformations to different heights and durations may be calculated as indicates in DNV Classification Notes 30.5 or any other codes.

3.5.1 Wind Speed by Return Period (m/s) – 10 minutes extreme values

Dir	Parameter	Return Period (Years)						
		1	10	20	30	50	100	1000
N	WS: Wind Speed (m/s)	17.30	23.07	24.79	25.81	27.09	28.81	34.55
	Hs: Associated wave in the same direction (m)	2.37	3.43	3.74	3.93	4.16	4.48	5.53
	CS: Associated current in the same direction (m/s)	0.36	0.47	0.51	0.53	0.55	0.59	0.70
NNE	WS: Wind Speed (m/s)	18.01	22.97	24.47	25.34	26.43	27.93	32.87
	Hs: Associated wave in the same direction (m)	3.14	4.19	4.50	4.69	4.92	5.23	6.27
	CS: Associated current in the same direction (m/s)	0.48	0.71	0.78	0.82	0.87	0.94	1.17
NE	WS: Wind Speed (m/s)	18.16	22.98	24.42	25.26	26.33	27.77	32.58
	Hs: Associated wave in the same direction (m)	3.34	4.35	4.66	4.83	5.06	5.36	6.37
	CS: Associated current in the same direction (m/s)	0.54	0.80	0.87	0.92	0.97	1.05	1.30
ENE	WS: Wind Speed (m/s)	17.94	22.84	24.3	25.16	26.24	27.71	32.59
	Hs: Associated wave in the same direction (m)	3.28	4.31	4.62	4.80	5.03	5.34	6.36
	CS: Associated current in the same direction (m/s)	0.52	0.78	0.86	0.90	0.96	1.04	1.30
E	WS: Wind Speed (m/s)	17.23	22.28	23.79	24.67	25.8	27.30	32.34
	Hs: Associated wave in the same direction (m)	3.14	4.20	4.52	4.71	4.94	5.26	6.32
	CS: Associated current in the same direction (m/s)	0.54	0.75	0.81	0.85	0.90	0.96	1.18
ESE	WS: Wind Speed (m/s)	16.53	21.74	23.30	24.21	25.37	26.93	32.13
	Hs: Associated wave in the same direction (m)	2.85	3.80	4.09	4.26	4.47	4.75	5.71
	CS: Associated current in the same direction (m/s)	0.42	0.64	0.71	0.76	0.81	0.89	1.13
SE	WS: Wind Speed (m/s)	16.56	21.89	23.49	24.42	25.6	27.19	32.50
	Hs: Associated wave in the same direction (m)	3.30	4.28	4.57	4.74	4.96	5.25	6.22
	CS: Associated current in the same direction (m/s)	0.41	0.60	0.66	0.70	0.74	0.80	1.00
SSE	WS: Wind Speed (m/s)	17.45	23.06	24.74	25.72	26.97	28.65	34.24
	Hs: Associated wave in the same direction (m)	3.51	4.43	4.71	4.87	5.08	5.35	6.27
	CS: Associated current in the same direction (m/s)	0.30	0.50	0.56	0.60	0.65	0.71	0.91

SOURCE: Measured wind data at Caravela and Merluza fields and Cluster BMS area in Santos Basin (1994-2011). The 1-hour wind from table 3.5.2 was converted to 10-minute wind using the factor 1.092 from DNV Classification Notes 30.5.

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 8 of 129

Title: METOCEAN DATA

Dir	Parameter	Return Period (Years)						
		1	10	20	30	50	100	1000
S	WS: Wind Speed (m/s)	19.18	25.52	27.43	28.55	29.95	31.84	38.17
	Hs: Associated wave in the same direction (m)	4.06	5.33	5.72	5.94	6.22	6.61	7.88
	CS: Associated current in the same direction (m/s)	0.30	0.46	0.51	0.53	0.57	0.61	0.77
SSW	WS: Wind Speed (m/s)	20.43	27.42	29.53	30.75	32.30	34.40	41.38
	Hs: Associated wave in the same direction (m)	4.85	6.58	7.10	7.41	7.79	8.31	10.03
	CS: Associated current in the same direction (m/s)	0.21	0.40	0.46	0.49	0.53	0.59	0.78
SW	WS: Wind Speed (m/s)	20.13	27.34	29.49	30.75	32.35	34.51	41.68
	Hs: Associated wave in the same direction (m)	5.04	6.89	7.44	7.77	8.18	8.73	10.57
	CS: Associated current in the same direction (m/s)	0.21	0.39	0.44	0.48	0.52	0.57	0.75
WSW	WS: Wind Speed (m/s)	18.92	26.19	28.37	29.65	31.26	33.44	40.68
	Hs: Associated wave in the same direction (m)	3.65	5.25	5.73	6.01	6.36	6.84	8.43
	CS: Associated current in the same direction (m/s)	0.20	0.38	0.44	0.47	0.51	0.57	0.75
W	WS: Wind Speed (m/s)	18.09	25.14	27.26	28.49	30.05	32.16	39.18
	Hs: Associated wave in the same direction (m)	3.32	4.96	5.46	5.75	6.11	6.60	8.24
	CS: Associated current in the same direction (m/s)	0.21	0.34	0.38	0.41	0.44	0.48	0.61
WNW	WS: Wind Speed (m/s)	16.82	23.38	25.35	26.51	27.95	29.92	36.45
	Hs: Associated wave in the same direction (m)	2.63	3.77	4.11	4.31	4.57	4.91	6.04
	CS: Associated current in the same direction (m/s)	0.21	0.33	0.37	0.39	0.41	0.45	0.57
NW	WS: Wind Speed (m/s)	16.06	22.12	23.94	25.00	26.33	28.16	34.19
	Hs: Associated wave in the same direction (m)	2.50	3.64	3.99	4.19	4.44	4.78	5.92
	CS: Associated current in the same direction (m/s)	0.22	0.38	0.43	0.45	0.49	0.54	0.67
NNW	WS: Wind Speed (m/s)	16.30	22.09	23.82	24.84	26.12	27.85	33.61
	Hs: Associated wave in the same direction (m)	2.16	3.32	3.67	3.88	4.13	4.48	5.64
	CS: Associated current in the same direction (m/s)	0.26	0.44	0.49	0.52	0.56	0.61	0.79

SOURCE: Measured wind data at Caravela, Tupi and Merluza fields in Santos Basin (1994-2011). The 1-hour wind from table 3.5.2 was converted to 10-minute wind using the factor 1.092 from DNV Classification Notes 30.5.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 9 of 129

Title: METOCEAN DATA

3.5.2 Joint Distribution of Wind Speed and Wind Direction (1 hour wind)

Spd	Dir>	N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	Total	%
0	1	54	62	57	49	58	56	48	40	50	51	56	52	54	47	54	55	843	1.02
1	2	199	197	179	159	156	166	195	158	174	151	135	144	156	135	137	162	2603	3.15
2	3	313	377	351	314	339	407	349	296	257	286	243	199	192	186	198	250	4557	5.52
3	4	400	538	623	612	620	575	502	521	417	318	268	222	166	192	232	254	6460	7.83
4	5	416	745	859	867	884	797	688	601	534	368	281	248	209	178	186	246	8107	9.82
5	6	471	968	1127	1107	1094	949	681	566	533	391	295	216	144	128	94	166	8930	10.8
6	7	477	1156	1441	1400	1152	961	763	593	471	404	284	197	141	82	72	140	9734	11.8
7	8	381	1293	1680	1554	1060	758	632	485	390	316	267	201	115	56	52	97	9337	11.3
8	9	315	1454	1835	1508	830	535	440	365	370	292	245	184	115	38	34	77	8637	10.5
9	10	166	1500	2145	1350	695	415	305	266	262	242	209	149	86	40	22	44	7896	9.56
10	11	114	1373	1998	1015	375	259	186	199	149	145	169	106	82	25	14	14	6223	7.54
11	12	84	1076	1580	581	192	135	98	100	127	90	93	128	58	10	12	16	4380	5.31
12	13	39	738	1008	299	86	80	45	49	61	52	61	82	45	9	9	6	2669	3.23
13	14	12	424	594	97	27	28	16	16	22	36	33	42	33	5	5	2	1392	1.69
14	15	4	147	236	32	16	8	6	8	5	9	9	11	14	5	0	1	511	0.62
15	16	2	39	84	14	2	5	7	6	1	3	9	8	7	0	2	0	189	0.23
16	17	0	16	16	3	3	2	0	0	4	1	2	2	5	2	0	0	56	0.07
17	18	0	5	3	2	0	0	1	0	1	0	1	3	3	0	0	0	19	0.02
18	19	0	2	0	0	0	0	0	0	0	0	0	2	0	0	0	0	4	0
19	20	0	0	0	0	0	0	0	0	0	0	1	2	0	0	0	0	3	0
20	21	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	2	0
21	22	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total		3447	12110	15816	10963	7589	6136	4962	4269	3828	3155	2662	2199	1625	1138	1123	1530	82552	
% Dir		4.18	14.67	19.16	13.28	9.19	7.43	6.01	5.17	4.64	3.82	3.22	2.66	1.97	1.38	1.36	1.85		
Mean Spd		5.83	8.3	8.61	7.55	6.62	6.26	6.08	6.1	6.17	6.19	6.38	6.47	5.91	4.56	4.22	4.5		

EIW1 2022-02-07T18:22:29

SOURCE: Measured wind data at Santos Basin from metocean buoy, production and drilling platforms (10-year measurement period). The values should be considered representative of 1-hour wind speeds.

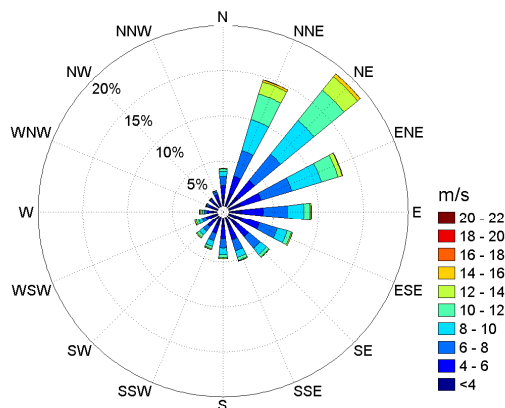


Figure 3.5.2.1 Directional percentage of surface winds (level 10 m)

4. TIDAL DATA

The water levels are regarded to the Reduction Level of DHN

Tidal Astron. Max. + Tidal Atm. Max.	1.75 m
Tidal Astronomical Maximum	1.30 m
Mean Higher High Water (MHHW)	1.24 m
Mean Sea Level	0.68 m
Mean Low High Water (MLHW)	0.24 m
Tidal Astronomical Minimum	- 0.10 m
Tidal Astr. Min. + Tidal Atm. Min.	- 0.55 m
Band of Spring Variation (MHHW-MLHW)	1.00 m
Band of Maximum Astronomical Variation	1.40 m

SOURCE:

- PETROBRAS Metocean Database (Engineering measurement program – mooring P1) at Central Cluster BS (mooring P1).
- <http://www.fundacaofemar.org.br> , São Sebastião Harbor (São Paulo).
- Oliveira, M.M.F., Ebecken, N.F.F, “Previsão da Variação do Nível do Mar na Bacia de Santos”, COPPE/UFRJ, 2009.
- <http://www.mar.mil.br/dhn/chm/tabuas/index.htm> , São Sebastião Harbor (São Paulo).



PETROBRAS


5. WAVE DATA

5.1 Extreme Single Peak Wave Criteria

The most extreme wave conditions at Santos Basin happen under single peak wave spectrum conditions. Strong winds are blowing with extensive wind fetch in the same direction of the dominant wave direction. Due to non-linear wave interactions, high frequency energy gradually feeds lower frequency and a single peak sea state is merged.

EIW1 2022-02-07T18:22:29

16/06/2008 18:00 - Hs = 7.61m Tp = 13.42s Dirp = 206°

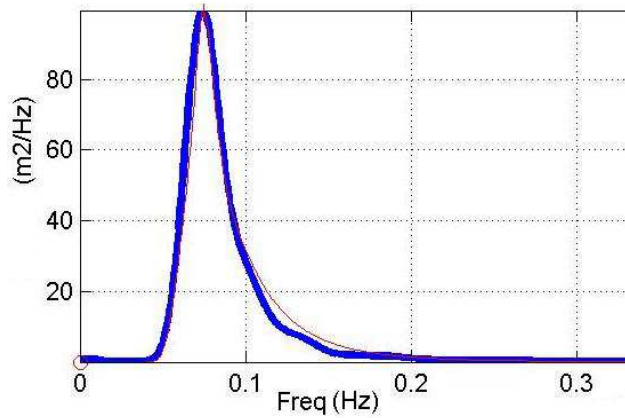

16/06/2008 18:00 Espectro 2D


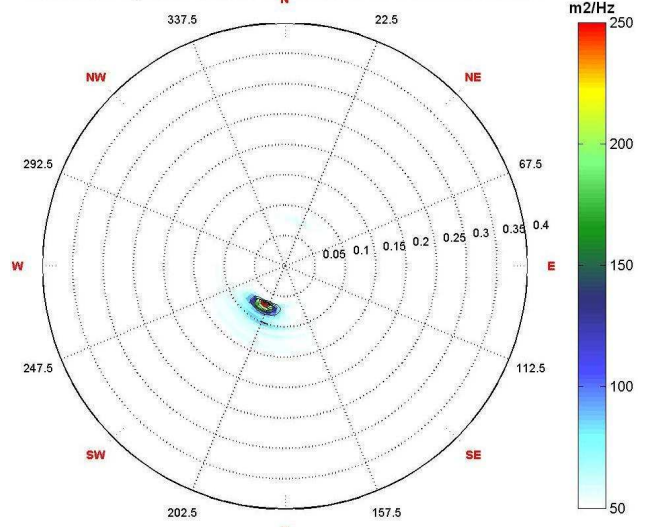


Figure 5.1.1 Typical single peak spectrum from SW-S quadrant wave storm

29/06/2008 22:59 - Hs = 2.31m Tp = 8.13s Dirp = 105°

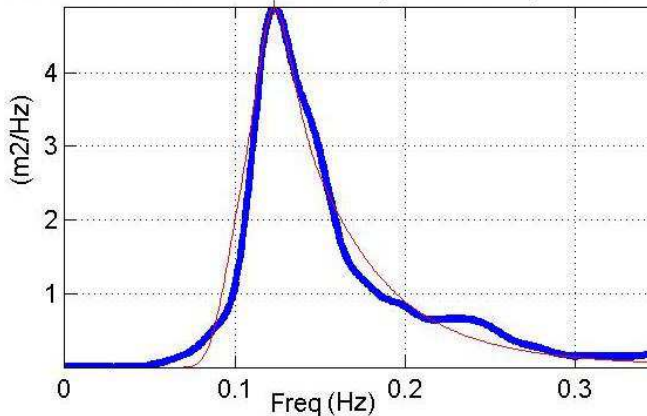

29/06/2008 22:59 Espectro 2D

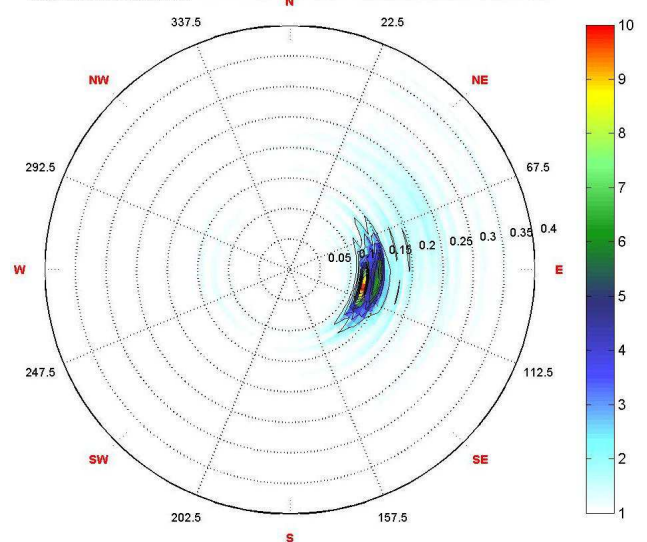


Figure 5.1.2 Typical single peak spectrum from E wave conditions



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 12 of 129

Title: METOCEAN DATA

5.1.1 Extreme Single Peak Wave Parameters by Return Periods (Years)

OBS: The table below present only the maximum significant wave height Hs (and associated parameters) from the extreme curves Hs x Tp presented on tables 5.1.2 to 5.1.17. For most design applications, it is recommended to used the full Hs x Tp curves.

Table with columns: Dir, Parameter, and Return Period (Years) (1, 10, 20, 30, 50, 100, 1000). Rows include parameters like Hs, TP, TZ, HMAX, THMAX, WS, and CS for directions N, NNE, NE, ENE, and E.

EIWI 2022-02-07T18:22:29

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 13 of 129

Title: METOCEAN DATA

Dir	Parameter	Return Period (Years)						
		1	10	20	30	50	100	1000
ESE	Hs: SIGNIFICANT WAVE HEIGHT (m)	3.92	5.22	5.61	5.83	6.12	6.50	7.79
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	10.30	11.30	11.50	11.80	12.00	12.00	13.00
	TZ: ZERO UP-CROSSING PERIOD (s)	7.60	8.31	8.45	8.67	8.81	8.81	9.52
	HMAX: MAXIMUM WAVE HEIGHT (m)	7.47	9.88	10.61	11.01	11.54	12.26	14.61
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	10.15	10.73	10.87	10.95	11.05	11.17	11.53
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	11.73	16.26	17.62	18.41	19.41	20.76	25.25
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.39	0.59	0.65	0.68	0.73	0.79	0.98
SE	Hs: SIGNIFICANT WAVE HEIGHT (m)	4.40	5.84	6.27	6.52	6.84	7.27	8.69
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	11.00	12.00	12.30	12.30	12.80	13.00	13.50
	TZ: ZERO UP-CROSSING PERIOD (s)	8.10	8.81	9.02	9.02	9.38	9.52	9.88
	HMAX: MAXIMUM WAVE HEIGHT (m)	8.35	11.01	11.80	12.27	12.84	13.63	16.25
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	12.02	13.30	13.68	13.91	14.18	14.56	15.82
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	12.39	16.97	18.33	19.13	20.14	21.51	26.04
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.32	0.54	0.60	0.64	0.69	0.75	0.96
SSE	Hs: SIGNIFICANT WAVE HEIGHT (m)	4.68	6.19	6.65	6.91	7.24	7.69	9.19
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	11.80	13.00	13.50	13.50	13.80	14.00	15.00
	TZ: ZERO UP-CROSSING PERIOD (s)	8.67	9.52	9.88	9.88	10.09	10.23	10.94
	HMAX: MAXIMUM WAVE HEIGHT (m)	8.83	11.61	12.44	12.92	13.52	14.35	17.06
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	12.26	13.59	13.99	14.22	14.51	14.91	16.21
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	10.04	14.58	15.94	16.73	17.73	19.08	23.58
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.30	0.49	0.55	0.58	0.63	0.68	0.88
S	Hs: SIGNIFICANT WAVE HEIGHT (m)	5.29	7.03	7.55	7.86	8.24	8.76	10.49
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	13.00	14.50	14.80	15.00	15.30	15.80	17.30
	TZ: ZERO UP-CROSSING PERIOD (s)	9.52	10.59	10.80	10.94	11.15	11.51	12.57
	HMAX: MAXIMUM WAVE HEIGHT (m)	9.92	13.08	14.03	14.59	15.28	16.21	19.28
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	12.78	14.30	14.75	15.03	15.35	15.80	17.28
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	10.92	15.28	16.58	17.35	18.31	19.61	23.93
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.24	0.42	0.47	0.50	0.54	0.60	0.77
SSW	Hs: SIGNIFICANT WAVE HEIGHT (m)	6.75	9.30	10.01	10.42	10.93	11.60	13.74
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	12.50	14.50	15.00	15.30	16.00	16.30	17.80
	TZ: ZERO UP-CROSSING PERIOD (s)	9.17	10.59	10.94	11.15	11.65	11.86	12.92
	HMAX: MAXIMUM WAVE HEIGHT (m)	12.69	17.31	18.59	19.32	20.20	21.41	25.20
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	14.11	16.33	16.95	17.30	17.72	18.30	20.13
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	14.28	20.65	22.44	23.46	24.72	26.40	31.76
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.21	0.39	0.44	0.47	0.51	0.56	0.71
SW	Hs: SIGNIFICANT WAVE HEIGHT (m)	6.86	9.18	9.81	10.16	10.60	11.17	12.95
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	12.00	14.00	14.80	15.00	15.80	16.00	17.80
	TZ: ZERO UP-CROSSING PERIOD (s)	8.81	10.23	10.80	10.94	11.51	11.65	12.92
	HMAX: MAXIMUM WAVE HEIGHT (m)	12.94	17.13	18.23	18.86	19.61	20.65	23.75
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	14.23	16.24	16.78	17.08	17.44	17.94	19.43
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	16.06	20.01	21.07	21.67	22.41	23.39	26.42
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.23	0.40	0.44	0.46	0.50	0.54	0.66

EIWI 2022-02-07T18:22:29

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 14 of 129

Title: METOCEAN DATA

Dir	Parameter	Return Period (Years)						
		1	10	20	30	50	100	1000
WSW	Hs: SIGNIFICANT WAVE HEIGHT (m)	5.52	6.85	7.19	7.37	7.60	7.89	8.76
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	10.00	11.50	12.00	12.30	12.50	12.80	13.80
	TZ: ZERO UP-CROSSING PERIOD (s)	7.39	8.45	8.81	9.02	9.17	9.38	10.09
	HMAX: MAXIMUM WAVE HEIGHT (m)	10.54	12.95	13.56	13.87	14.29	14.81	16.36
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	10.86	11.28	11.38	11.43	11.49	11.56	11.77
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	16.45	19.65	20.45	20.90	21.44	22.14	24.23
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.27	0.41	0.44	0.46	0.49	0.52	0.60
W	Hs: SIGNIFICANT WAVE HEIGHT (m)	4.67	5.77	6.04	6.20	6.38	6.62	7.35
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	8.80	10.00	10.00	10.50	10.50	10.80	11.50
	TZ: ZERO UP-CROSSING PERIOD (s)	6.53	7.39	7.39	7.74	7.74	7.96	8.45
	HMAX: MAXIMUM WAVE HEIGHT (m)	8.99	11.01	11.53	11.80	12.14	12.57	13.90
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	10.53	10.95	11.04	11.09	11.15	11.22	11.43
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	16.15	19.49	20.33	20.80	21.37	22.10	24.31
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.23	0.33	0.36	0.37	0.39	0.41	0.49
WNW	Hs: SIGNIFICANT WAVE HEIGHT (m)	3.82	4.46	4.61	4.70	4.80	4.92	5.30
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	7.80	8.30	8.30	8.50	8.50	8.50	9.00
	TZ: ZERO UP-CROSSING PERIOD (s)	5.81	6.17	6.17	6.31	6.31	6.31	6.67
	HMAX: MAXIMUM WAVE HEIGHT (m)	7.41	8.62	8.91	9.07	9.26	9.49	10.19
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	10.13	10.44	10.51	10.55	10.59	10.64	10.79
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	14.75	18.09	18.89	19.32	19.84	20.51	22.45
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.29	0.42	0.45	0.47	0.49	0.51	0.58
NW	Hs: SIGNIFICANT WAVE HEIGHT (m)	3.71	4.33	4.48	4.56	4.66	4.78	5.13
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	7.00	7.50	7.80	7.80	7.80	8.00	8.00
	TZ: ZERO UP-CROSSING PERIOD (s)	5.23	5.59	5.81	5.81	5.81	5.95	5.95
	HMAX: MAXIMUM WAVE HEIGHT (m)	7.25	8.42	8.69	8.85	9.04	9.26	9.94
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	10.09	10.40	10.46	10.50	10.54	10.59	10.74
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	15.83	18.31	18.90	19.23	19.61	20.11	21.54
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.27	0.42	0.46	0.48	0.50	0.53	0.62
NNW	Hs: SIGNIFICANT WAVE HEIGHT (m)	3.44	4.05	4.20	4.28	4.38	4.50	4.87
	TP: PEAK PERIOD ASSOCIATED TO Hs (s)	6.80	7.30	7.50	7.50	7.50	7.50	7.80
	TZ: ZERO UP-CROSSING PERIOD (s)	5.09	5.45	5.59	5.59	5.59	5.59	5.81
	HMAX: MAXIMUM WAVE HEIGHT (m)	6.73	7.89	8.17	8.32	8.52	8.75	9.45
	THMAX: PERIOD ASSOCIATED TO HMAX (s)	9.93	10.26	10.33	10.37	10.42	10.48	10.63
	WS:ASSOCIATED WIND SPEED (m/s) IN THE SAME DIRECTION	14.47	17.69	18.48	18.91	19.43	20.10	22.06
	CS : ASSOCIATED CURRENT (m/s) IN THE SAME DIRECTION	0.31	0.45	0.49	0.51	0.53	0.56	0.65

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 15 of 129

Title: METOCEAN DATA

5.1.2 Single Peak Wave Extreme Hs x Tp curves for N Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5
1	Hs(m)	0.0	2.0	2.5	2.8	3.1	3.3	3.5	3.6	3.5	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	5.4	7.2	9.0	10.7	12.4	14.1	15.8	14.8	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.2	0.2	0.2	0.2	0.2	0.2	0.4	0.3	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	1.7	2.1	2.7	3.2	3.5	3.8	3.9	4.1	4.2	4.2	4.1	0.0	0.0	0.0
	Ws (m/s)	4.1	5.8	7.9	10.6	12.4	14.0	15.3	16.7	17.8	18.3	16.5	0.0	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.5	0.4	0.0	0.0	0.0
20	Hs(m)	1.7	2.1	2.7	3.2	3.6	3.9	4.0	4.2	4.3	4.3	4.3	3.8	0.0	0.0
	Ws (m/s)	4.0	5.8	7.9	10.6	12.8	14.3	15.6	16.8	18.1	18.7	17.9	14.1	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.5	0.5	0.2	0.0	0.0
30	Hs(m)	1.7	2.1	2.7	3.2	3.7	3.9	4.1	4.3	4.3	4.4	4.4	4.2	0.0	0.0
	Ws (m/s)	4.0	5.8	7.9	10.5	13.3	14.6	15.9	17.1	18.1	19.0	18.5	16.3	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.5	0.5	0.3	0.0	0.0
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.0	4.2	4.3	4.4	4.5	4.5	4.3	0.0	0.0
	Ws (m/s)	4.0	5.8	7.9	10.5	13.5	14.8	16.0	17.3	18.5	19.6	19.2	17.5	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.6	0.5	0.4	0.0	0.0
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.1	4.3	4.4	4.5	4.6	4.6	4.5	4.1	0.0
	Ws (m/s)	4.0	5.8	7.9	10.4	13.6	15.3	16.5	17.6	18.7	19.7	20.1	18.7	15.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.5	0.6	0.6	0.5	0.2	0.0
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.3	4.5	4.7	4.8	4.9	5.0	5.0	4.9	4.6
	Ws (m/s)	4.0	5.8	7.9	10.4	13.3	16.2	17.5	18.5	19.6	20.6	21.4	21.4	20.2	17.8
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.5	0.6	0.7	0.7	0.6	0.4

5.1.3 Single Peak Wave Extreme Hs x Tp curves for NNE Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5
1	Hs(m)	0.0	0.0	2.3	2.7	3.1	3.4	3.7	3.9	4.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	6.1	7.1	8.4	9.7	11.2	12.9	14.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	0.0	2.1	2.7	3.1	3.5	3.8	4.1	4.4	4.7	5.0	5.2	5.3	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	5.8	6.9	8.2	9.4	10.5	11.7	12.9	14.2	15.5	16.7	17.7	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.0	0.0	0.0	0.0	0.0	0.0
20	Hs(m)	0.0	2.1	2.7	3.2	3.6	3.9	4.2	4.6	4.9	5.2	5.4	5.6	5.6	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	5.7	6.9	8.6	9.7	10.9	11.9	13.3	14.4	15.6	16.8	17.9	18.6	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.6	0.0	0.0	0.0	0.0	0.0
30	Hs(m)	1.7	2.1	2.7	3.2	3.6	3.9	4.3	4.6	4.9	5.2	5.5	5.7	5.8	5.7	0.0	0.0	0.0	0.0
	Ws (m/s)	5.4	5.7	6.9	8.5	9.8	10.8	12.2	13.3	14.4	15.6	16.8	17.9	19.1	18.1	0.0	0.0	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.6	0.5	0.0	0.0	0.0	0.0
50	Hs(m)	1.7	2.1	2.7	3.2	3.7	4.0	4.4	4.7	5.0	5.3	5.6	5.8	6.0	6.1	0.0	0.0	0.0	0.0
	Ws (m/s)	5.3	5.7	6.9	8.5	10.0	11.0	12.2	13.4	14.7	15.5	16.9	17.9	19.1	19.8	0.0	0.0	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.6	0.6	0.0	0.0	0.0	0.0
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.1	4.4	4.8	5.1	5.4	5.7	6.0	6.3	6.4	6.5	0.0	0.0	0.0
	Ws (m/s)	5.2	5.7	6.9	8.5	10.2	11.4	12.3	13.6	14.6	15.9	16.8	18.0	19.2	20.2	20.8	0.0	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.6	0.6	0.7	0.0	0.0	0.0
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.4	4.7	5.0	5.4	5.7	6.1	6.4	6.7	7.0	7.3	7.5	7.7	7.6
	Ws (m/s)	4.9	5.7	6.9	8.5	10.3	12.1	12.8	14.0	15.2	16.1	17.3	18.5	19.6	20.7	21.6	22.6	23.8	23.5
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.5	0.5	0.6	0.7	0.7	0.8	0.8

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 16 of 129

Title: METOCEAN DATA

5.1.4 Single Peak Wave Extreme Hs x Tp curves for NE Direction

Table with 20 columns (Return Period, Tp1(s), 4.0 to 13.0) and 18 rows (Return Periods 1, 10, 20, 30, 50, 100, 1000). Each cell contains values for Hs(m), Ws(m/s), and Cs(m/s).

5.1.5 Single Peak Wave Extreme Hs x Tp curves for ENE Direction

Table with 20 columns (Return Period, Tp1(s), 4.0 to 13.0) and 18 rows (Return Periods 1, 10, 20, 30, 50, 100, 1000). Each cell contains values for Hs(m), Ws(m/s), and Cs(m/s).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 17 of 129

Title: METOCEAN DATA

Return Period (Years)	Tp1(s)	13.5		14.0	
		Hs(m)	0.0	0.0	0.0
1	Hs(m)	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0	0.0
10	Hs(m)	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0	0.0
20	Hs(m)	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0	0.0
30	Hs(m)	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0	0.0
50	Hs(m)	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0	0.0
100	Hs(m)	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0	0.0
1000	Hs(m)	7.5	6.8		
	Ws (m/s)	24.4	20.3		
	Cs(m/s)	1.0	0.8		

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **18 of 129**

Title: **METOCEAN DATA**

5.1.6 Single Peak Wave Extreme Hs x Tp curves for E Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0
1	Hs(m)	0.0	0.0	2.6	2.9	3.2	3.4	3.6	3.7	3.8	3.9	4.0	4.0	4.0	3.9	3.8	3.6	3.2	0.0	0.0
	Ws (m/s)	0.0	0.0	3.0	3.0	3.0	4.2	5.9	7.0	8.4	9.7	11.1	11.8	11.1	9.7	8.2	5.9	2.9	0.0	0.0
	Cs(m/s)	0.0	0.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.4	0.4	0.3	0.2	0.2	0.2	0.0
10	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.6	4.8	4.9	5.1	5.2	5.2	5.3	5.3	5.3	5.2	5.1	4.9	4.6
	Ws (m/s)	3.0	3.0	3.0	3.0	5.4	9.1	10.2	11.4	12.4	13.5	14.4	15.3	16.3	16.3	15.9	14.8	13.5	12.1	9.8
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.5	0.5	0.6	0.6	0.6	0.5	0.4	0.3	0.2
20	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.9	5.1	5.2	5.4	5.5	5.6	5.6	5.7	5.7	5.6	5.5	5.4	5.2
	Ws (m/s)	3.0	3.0	3.0	3.0	5.2	8.7	11.2	12.5	13.3	14.4	15.5	16.4	17.0	17.9	17.4	16.7	15.8	14.4	12.9
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.6	0.6	0.5	0.4	0.3
30	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.1	5.3	5.4	5.6	5.7	5.8	5.9	5.9	5.9	5.9	5.8	5.7	5.5
	Ws (m/s)	3.0	3.0	3.0	3.0	5.1	8.5	11.9	13.2	13.9	15.2	15.9	16.9	17.7	18.4	18.4	17.7	16.9	15.9	14.4
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.6	0.6	0.5	0.4
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.5	5.7	5.8	5.9	6.0	6.1	6.2	6.2	6.2	6.1	6.0	5.8
	Ws (m/s)	3.0	3.0	3.0	3.0	5.0	8.3	12.1	14.0	14.8	15.7	16.8	17.5	18.5	19.1	19.7	19.3	18.5	17.2	16.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.4	0.5	0.5	0.6	0.7	0.7	0.7	0.7	0.7	0.6	0.5
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.7	6.0	6.1	6.2	6.3	6.5	6.5	6.6	6.6	6.5	6.5	6.3
	Ws (m/s)	3.0	3.0	3.0	3.0	4.8	8.0	11.6	14.6	16.0	16.8	17.7	18.5	19.5	20.1	20.8	20.8	20.1	19.5	18.1
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.8	0.8	0.7	0.7	0.6
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.2	7.2	7.4	7.5	7.7	7.8	7.8	7.8	7.8	7.8
	Ws (m/s)	3.0	3.0	3.0	3.0	4.6	7.5	10.7	14.3	18.5	20.4	20.9	21.9	22.8	23.6	24.4	24.9	25.7	25.4	24.7
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.4	0.6	0.7	0.7	0.8	0.8	0.9	0.9	0.9	1.0	1.0	0.9

EIW1 2022-02-07T18:22:29

Return Period (Years)	Tp1(s)	13.5	14.0	14.5	15.0	15.5	16.0	16.5
1	Hs(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	4.2	3.4	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	7.5	3.1	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.2	0.2	0.0	0.0	0.0	0.0	0.0
20	Hs(m)	4.9	4.3	3.4	0.0	0.0	0.0	0.0
	Ws (m/s)	10.9	7.8	3.1	0.0	0.0	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.0	0.0	0.0	0.0
30	Hs(m)	5.2	4.8	4.1	0.0	0.0	0.0	0.0
	Ws (m/s)	12.3	10.1	6.5	0.0	0.0	0.0	0.0
	Cs(m/s)	0.3	0.2	0.2	0.0	0.0	0.0	0.0
50	Hs(m)	5.6	5.2	4.7	3.9	0.0	0.0	0.0
	Ws (m/s)	14.4	12.2	9.3	5.2	0.0	0.0	0.0
	Cs(m/s)	0.4	0.3	0.2	0.0	0.0	0.0	0.0
100	Hs(m)	6.1	5.8	5.4	4.8	3.7	0.0	0.0
	Ws (m/s)	16.8	15.1	12.6	9.6	4.2	0.0	0.0
	Cs(m/s)	0.5	0.4	0.3	0.2	0.2	0.0	0.0
1000	Hs(m)	7.7	7.5	7.3	7.1	6.6	6.0	5.1
	Ws (m/s)	24.0	22.8	21.4	19.9	17.6	14.5	10.0
	Cs(m/s)	0.9	0.8	0.7	0.6	0.5	0.4	0.2

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **19 of 129**

Title: **METOCEAN DATA**

5.1.7 Single Peak Wave Extreme Hs x Tp curves for ESE Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0
1	Hs(m)	0.0	0.0	0.0	2.5	2.8	3.1	3.3	3.4	3.6	3.7	3.8	3.9	3.9	3.9	3.9	3.9	3.8	3.7	3.5
	Ws (m/s)	0.0	0.0	0.0	3.0	3.0	3.5	4.9	5.8	7.1	8.1	9.0	10.0	10.7	11.4	11.4	10.3	9.2	8.1	6.6
	Cs(m/s)	0.0	0.0	0.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.3	0.2	0.2	0.2
10	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.2	4.4	4.6	4.7	4.8	4.9	5.1	5.1	5.2	5.2	5.2	5.2	5.2	5.1
	Ws (m/s)	3.0	3.0	3.0	3.7	6.6	8.6	9.7	10.7	11.4	12.4	13.1	14.0	14.7	15.2	15.9	16.3	15.7	15.1	14.3
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.5	0.5	0.4
20	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.7	4.9	5.0	5.2	5.3	5.4	5.5	5.5	5.6	5.6	5.6	5.6	5.5
	Ws (m/s)	3.0	3.0	3.0	3.6	6.4	9.7	11.0	11.7	12.5	13.6	14.2	15.3	15.8	16.3	17.1	17.6	17.3	16.8	16.1
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.7	0.6	0.6	0.5
30	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.9	5.0	5.2	5.4	5.5	5.6	5.7	5.8	5.8	5.8	5.8	5.8	5.8
	Ws (m/s)	3.0	3.0	3.0	3.6	6.3	9.5	11.5	12.3	13.5	14.2	14.9	15.6	16.5	17.1	17.7	18.0	18.3	17.8	17.1
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.4	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.6	0.6
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.1	5.3	5.5	5.6	5.7	5.8	5.9	6.0	6.1	6.1	6.1	6.1	6.1
	Ws (m/s)	3.0	3.0	3.0	3.5	6.2	9.3	12.2	13.5	14.3	15.1	15.8	16.5	17.2	18.1	18.6	19.1	19.4	19.1	18.4
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.7	0.7	0.6
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.6	5.8	5.9	6.1	6.2	6.3	6.4	6.4	6.5	6.5	6.5	6.5
	Ws (m/s)	3.0	3.0	3.0	3.5	6.1	9.0	12.4	14.5	15.4	16.2	17.0	17.8	18.5	19.1	19.6	20.2	20.6	20.6	20.2
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.7	0.7	0.7	0.8	0.8	0.7
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.0	7.1	7.3	7.4	7.5	7.6	7.7	7.7	7.8	7.8
	Ws (m/s)	3.0	3.0	3.0	3.4	5.8	8.6	11.7	15.1	18.9	20.0	20.5	21.4	22.3	22.7	23.4	24.0	24.4	24.8	25.3
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.4	0.6	0.7	0.7	0.7	0.7	0.8	0.8	0.9	0.9	0.9	1.0

EIWI 2022-02-07T18:22:29

Return Period (Years)	Tp1(s)	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0	17.5	18.0	18.5	19.0
1	Hs(m)	3.3	2.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	4.9	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	5.0	4.8	4.6	4.3	3.9	3.3	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	13.4	12.1	10.7	8.9	7.1	4.1	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.3	0.2	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0
20	Hs(m)	5.4	5.3	5.1	4.9	4.5	4.1	3.5	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	15.3	14.2	13.2	11.7	9.8	7.8	4.8	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0
30	Hs(m)	5.7	5.5	5.4	5.2	4.9	4.5	4.0	3.2	0.0	0.0	0.0	0.0
	Ws (m/s)	16.3	15.3	14.2	13.1	11.5	9.4	6.9	3.3	0.0	0.0	0.0	0.0
	Cs(m/s)	0.5	0.5	0.4	0.3	0.2	0.2	0.2	0.2	0.0	0.0	0.0	0.0
50	Hs(m)	6.0	5.9	5.7	5.5	5.2	4.9	4.5	3.9	0.0	0.0	0.0	0.0
	Ws (m/s)	17.8	16.9	15.8	14.7	13.0	11.3	9.5	6.5	0.0	0.0	0.0	0.0
	Cs(m/s)	0.6	0.5	0.5	0.4	0.3	0.2	0.2	0.2	0.0	0.0	0.0	0.0
100	Hs(m)	6.4	6.3	6.2	6.0	5.8	5.5	5.1	4.6	4.0	0.0	0.0	0.0
	Ws (m/s)	19.4	18.8	17.8	16.6	15.4	14.1	12.2	9.8	7.0	0.0	0.0	0.0
	Cs(m/s)	0.7	0.6	0.6	0.5	0.4	0.4	0.3	0.2	0.0	0.0	0.0	0.0
1000	Hs(m)	7.8	7.7	7.7	7.6	7.4	7.2	7.0	6.7	6.3	5.8	5.1	4.3
	Ws (m/s)	25.6	25.7	25.8	25.8	25.7	25.4	25.0	24.4	23.6	22.3	20.5	18.3
	Cs(m/s)	1.0	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	0.9

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 20 of 129

Title: METOCEAN DATA

5.1.8 Single Peak Wave Extreme Hs x Tp curves for SE Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0
1	Hs(m)	0.0	0.0	0.0	0.0	2.9	3.2	3.5	3.7	3.9	4.0	4.1	4.2	4.3	4.4	4.4	4.4	4.4	4.3	4.2
	Ws (m/s)	0.0	0.0	0.0	0.0	3.0	3.0	4.3	5.5	6.7	7.7	8.7	9.6	10.4	11.3	12.4	12.4	11.5	10.5	9.4
	Cs(m/s)	0.0	0.0	0.0	0.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.2	0.2
10	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.7	4.9	5.1	5.3	5.4	5.5	5.7	5.7	5.8	5.8	5.8	5.8	5.8
	Ws (m/s)	3.0	3.0	3.0	3.0	5.1	8.1	9.2	10.3	11.4	12.1	13.1	13.7	14.7	15.2	15.9	16.4	17.0	16.6	16.2
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.5	0.5	0.5	0.5	0.5
20	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.1	5.3	5.4	5.7	5.8	5.9	6.0	6.1	6.2	6.2	6.3	6.3	6.3
	Ws (m/s)	3.0	3.0	3.0	3.0	5.0	7.8	10.8	11.6	12.4	13.5	14.2	14.9	15.6	16.5	17.1	17.5	18.0	18.3	17.8
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.5	0.5	0.5	0.6	0.6	0.6
30	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.5	5.6	5.9	6.0	6.1	6.2	6.3	6.4	6.5	6.5	6.5	6.5
	Ws (m/s)	3.0	3.0	3.0	3.0	5.0	7.7	10.9	12.2	12.9	14.2	14.9	15.6	16.3	16.9	17.5	18.3	18.8	19.1	18.8
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.5	0.5	0.5	0.6	0.6	0.6	0.6
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.8	5.9	6.1	6.3	6.4	6.5	6.6	6.7	6.8	6.8	6.8	6.8
	Ws (m/s)	3.0	3.0	3.0	3.0	4.9	7.6	10.7	13.3	14.1	15.0	15.8	16.5	17.2	17.9	18.5	19.1	19.5	19.9	19.9
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.5	0.5	0.5	0.6	0.6	0.6	0.7	0.7
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.3	6.5	6.6	6.8	6.9	7.0	7.1	7.2	7.2	7.3	7.3
	Ws (m/s)	3.0	3.0	3.0	3.0	4.8	7.5	10.4	13.8	15.2	16.0	16.9	17.7	18.5	18.8	19.5	20.1	20.7	21.1	21.5
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.4	0.5	0.5	0.6	0.6	0.6	0.7	0.7	0.7	0.7
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	7.8	7.9	8.1	8.2	8.4	8.5	8.6	8.6	8.7
	Ws (m/s)	3.0	3.0	3.0	3.0	4.7	7.2	9.9	12.9	16.2	19.0	20.7	21.2	22.2	22.6	23.5	24.0	24.6	25.2	25.4
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.6	0.7	0.7	0.7	0.8	0.8	0.8	0.9	0.9	0.9

Return Period (Years)	Tp1(s)	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0	17.5	18.0	18.5	19.0	19.5	20.0	20.5
1	Hs(m)	4.1	3.9	3.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	8.2	6.7	4.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	5.7	5.7	5.5	5.3	5.1	4.8	4.3	3.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	15.4	14.7	13.7	12.4	11.0	9.6	7.4	5.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.4	0.3	0.3	0.2	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20	Hs(m)	6.2	6.1	6.0	5.8	5.7	5.4	5.0	4.6	4.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	17.3	16.5	15.6	14.6	13.5	12.0	10.4	8.4	5.8	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.5	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0
30	Hs(m)	6.5	6.4	6.3	6.1	5.9	5.7	5.4	5.0	4.5	3.7	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	18.1	17.5	16.6	15.6	14.6	13.3	11.7	10.0	8.0	4.6	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.6	0.5	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0
50	Hs(m)	6.8	6.7	6.7	6.5	6.3	6.1	5.9	5.5	5.1	4.5	3.5	0.0	0.0	0.0	0.0
	Ws (m/s)	19.3	18.8	18.2	17.2	16.1	15.0	13.7	11.9	10.1	7.5	3.7	0.0	0.0	0.0	0.0
	Cs(m/s)	0.6	0.6	0.6	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.2	0.0	0.0	0.0	0.0
100	Hs(m)	7.3	7.2	7.1	7.0	6.9	6.7	6.5	6.2	5.8	5.3	4.6	3.6	0.0	0.0	0.0
	Ws (m/s)	21.9	22.0	22.3	22.3	22.2	22.1	21.8	21.3	20.6	19.7	18.2	15.6	0.0	0.0	0.0
	Cs(m/s)	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.7	0.6	0.0	0.0	0.0
1000	Hs(m)	8.7	8.7	8.7	8.6	8.5	8.4	8.2	8.0	7.8	7.5	7.1	6.5	5.9	5.1	3.9
	Ws (m/s)	25.9	25.9	25.4	24.8	24.2	23.5	22.6	21.7	20.7	19.1	17.4	15.0	12.6	9.7	5.0
	Cs(m/s)	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.7	0.7	0.6	0.5	0.4	0.2	0.2

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **21 of 129**

Title: **METOCEAN DATA**

5.1.9 Single Peak Wave Extreme Hs x Tp curves for SSE Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0
1	Hs(m)	0.0	0.0	0.0	0.0	2.9	3.3	3.5	3.7	4.0	4.1	4.3	4.4	4.5	4.6	4.6	4.7	4.7	4.7	4.6
	Ws (m/s)	0.0	0.0	0.0	0.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	4.1	5.4	6.8	7.8	9.1	10.0	8.7	7.6
	Cs(m/s)	0.0	0.0	0.0	0.0	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.2	0.2
10	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.8	5.0	5.2	5.3	5.5	5.6	5.8	5.9	6.0	6.1	6.1	6.2	6.2
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	4.0	4.9	5.8	7.2	8.1	8.9	10.3	11.0	11.8	12.9	13.5	14.3
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.5	0.5
20	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.1	5.3	5.5	5.7	5.9	6.0	6.1	6.3	6.4	6.5	6.5	6.6	6.6
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.8	4.7	6.3	7.2	8.2	9.2	10.1	11.0	11.9	12.7	13.5	14.7	15.5
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.5
30	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.5	5.7	5.9	6.1	6.2	6.4	6.5	6.6	6.7	6.8	6.9	6.9
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	4.1	5.7	6.8	7.8	8.8	9.8	10.8	11.7	12.7	13.4	14.3	15.1	15.9
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.5	0.5	0.5	0.5
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.7	5.9	6.1	6.3	6.5	6.6	6.7	6.9	7.0	7.1	7.1	7.2
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.8	6.4	7.4	8.5	9.5	10.6	11.6	12.1	13.1	14.0	14.8	15.6	16.5
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.5	0.5	0.5	0.6
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.2	6.4	6.6	6.8	6.9	7.1	7.3	7.4	7.4	7.5	7.6
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.4	7.1	8.3	9.5	10.5	11.7	12.2	13.3	14.3	15.2	15.7	16.6	17.3
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.5	0.5	0.5	0.6	0.6
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	7.8	7.9	8.1	8.3	8.4	8.6	8.7	8.9	8.9
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	5.9	9.4	12.4	13.9	14.6	15.5	16.5	17.1	18.3	18.9	19.9	20.4
	Cs(m/s)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	0.5	0.5	0.5	0.6	0.6	0.7	0.7	0.7	0.7

Return Period (Years)	Tp1(s)	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0	17.5	18.0	18.5	19.0	19.5	20.0	20.5	21.0
1	Hs(m)	4.5	4.4	4.2	3.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	6.1	4.1	3.0	3.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.2	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	6.2	6.2	6.1	6.0	5.8	5.6	5.3	4.9	4.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	15.3	15.7	16.4	16.9	17.5	17.7	18.0	18.0	17.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20	Hs(m)	6.7	6.6	6.6	6.5	6.4	6.2	6.0	5.7	5.3	4.6	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	16.0	15.5	14.4	13.1	12.3	10.6	9.2	7.2	4.7	3.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.6	0.5	0.5	0.4	0.4	0.3	0.3	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0
30	Hs(m)	6.9	6.9	6.9	6.8	6.7	6.6	6.4	6.1	5.7	5.2	4.4	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	16.7	16.7	15.5	14.7	13.4	12.2	10.8	9.3	6.8	4.2	3.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.6	0.6	0.5	0.5	0.5	0.4	0.3	0.3	0.2	0.2	0.2	0.0	0.0	0.0	0.0	0.0
50	Hs(m)	7.2	7.2	7.2	7.2	7.1	7.0	6.8	6.6	6.3	5.8	5.3	4.2	0.0	0.0	0.0	0.0
	Ws (m/s)	17.1	17.5	17.1	16.0	15.2	14.0	12.6	11.1	9.5	6.9	4.2	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.6	0.6	0.6	0.6	0.5	0.5	0.4	0.4	0.3	0.2	0.2	0.2	0.0	0.0	0.0	0.0
100	Hs(m)	7.7	7.7	7.7	7.7	7.6	7.5	7.4	7.2	6.9	6.6	6.2	5.6	4.6	0.0	0.0	0.0
	Ws (m/s)	18.2	18.8	18.8	18.2	17.3	16.6	15.2	13.8	12.2	10.5	8.3	5.5	3.0	0.0	0.0	0.0
	Cs(m/s)	0.6	0.7	0.7	0.6	0.6	0.6	0.5	0.5	0.4	0.3	0.2	0.2	0.2	0.0	0.0	0.0
1000	Hs(m)	9.0	9.1	9.2	9.2	9.2	9.2	9.1	9.0	8.9	8.8	8.6	8.3	7.9	7.3	6.7	5.6
	Ws (m/s)	21.4	21.8	22.5	23.3	23.3	23.0	22.1	21.4	20.4	19.4	18.3	16.5	14.6	11.9	9.2	4.4
	Cs(m/s)	0.8	0.8	0.8	0.9	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.6	0.5	0.4	0.3	0.2

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 22 of 129

Title: METOCEAN DATA

5.1.10 Single Peak Wave Extreme Hs x Tp curves for S Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0
1	Hs(m)	0.0	0.0	0.0	0.0	0.0	0.0	3.5	3.8	4.1	4.3	4.5	4.7	4.8	4.9	5.0	5.2	5.2	5.3	5.3
	Ws (m/s)	0.0	0.0	0.0	0.0	0.0	0.0	3.0	3.0	3.0	3.0	3.0	3.8	4.7	5.9	6.8	8.0	8.8	10.0	10.9
	Cs(m/s)	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2
10	Hs(m)	0.0	2.1	2.7	3.2	3.8	4.5	4.9	5.1	5.4	5.6	5.7	5.9	6.2	6.3	6.5	6.6	6.7	6.8	6.9
	Ws (m/s)	0.0	3.0	3.0	3.0	3.0	3.0	3.0	3.7	4.9	5.7	6.5	7.3	8.5	9.3	10.1	10.9	11.6	12.3	13.3
	Cs(m/s)	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.3
20	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.5	5.8	6.0	6.2	6.4	6.6	6.7	6.8	7.0	7.1	7.2	7.3
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.8	5.1	6.0	6.9	7.7	8.6	9.5	10.3	10.8	11.6	12.4	13.2	13.9
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.3	0.3
30	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.7	5.9	6.1	6.4	6.6	6.8	6.9	7.1	7.2	7.4	7.5	7.6
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.7	5.5	6.4	7.3	8.2	9.1	10.0	10.5	11.4	12.2	13.0	13.9	14.6
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.3	0.3	0.4
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.1	6.4	6.6	6.8	7.1	7.2	7.4	7.5	7.6	7.8	7.9
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.5	6.3	6.9	7.9	8.8	9.8	10.7	11.2	12.1	13.0	13.5	14.3	15.1
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.3	0.4	0.4
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.5	6.8	6.9	7.2	7.3	7.6	7.8	7.9	8.1	8.2	8.3
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.3	6.0	8.1	9.1	9.7	10.7	11.2	12.2	13.2	13.7	14.6	15.1	15.9
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.4
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	8.1	8.4	8.5	8.7	9.0	9.2	9.3	9.5	9.7
	Ws (m/s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	5.5	8.2	10.4	12.7	13.6	14.2	14.8	16.0	16.6	17.2	18.0	18.9
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.3	0.3	0.3	0.4	0.4	0.4	0.5	0.5	0.5

Return Period (Years)	Tp1(s)	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0	17.5	18.0	18.5	19.0	19.5	20.0	20.5	21.0	21.5	22.0
1	Hs(m)	5.3	5.3	5.2	5.0	4.8	4.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	11.5	12.2	13.0	13.8	14.5	15.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.3	0.3	0.4	0.4	0.4	0.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	7.0	7.0	7.0	7.0	7.0	6.9	6.8	6.6	6.3	6.0	5.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	13.9	14.5	15.1	14.7	14.2	13.3	12.3	10.9	9.3	7.7	4.9	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.2	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20	Hs(m)	7.4	7.5	7.5	7.6	7.5	7.5	7.4	7.3	7.1	6.8	6.5	5.9	4.8	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	14.6	15.5	16.0	16.3	16.0	15.5	14.6	13.5	12.4	10.8	9.1	6.4	3.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.4	0.4	0.5	0.4	0.4	0.4	0.3	0.3	0.2	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0
30	Hs(m)	7.7	7.8	7.8	7.9	7.9	7.8	7.8	7.7	7.5	7.3	7.0	6.6	5.9	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	15.3	15.9	16.5	17.4	17.4	16.5	15.9	15.0	13.9	12.7	10.9	9.1	6.4	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.4	0.5	0.5	0.5	0.5	0.4	0.4	0.3	0.3	0.2	0.1	0.1	0.0	0.0	0.0	0.0	0.0
50	Hs(m)	8.0	8.1	8.2	8.2	8.2	8.2	8.2	8.1	8.0	7.9	7.5	7.3	6.7	6.0	0.0	0.0	0.0	0.0
	Ws (m/s)	15.9	16.6	17.2	17.8	18.1	18.1	17.2	16.6	15.5	14.7	13.0	11.7	9.3	6.4	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.3	0.2	0.1	0.1	0.0	0.0	0.0	0.0
100	Hs(m)	8.5	8.5	8.6	8.7	8.8	8.8	8.8	8.7	8.6	8.5	8.3	8.1	7.7	7.2	6.4	0.0	0.0	0.0
	Ws (m/s)	16.7	17.1	17.8	18.5	19.1	19.4	19.1	18.5	17.8	17.1	15.9	14.6	12.7	10.7	7.6	0.0	0.0	0.0
	Cs(m/s)	0.5	0.5	0.5	0.5	0.6	0.6	0.6	0.5	0.5	0.5	0.4	0.4	0.3	0.2	0.1	0.0	0.0	0.0
1000	Hs(m)	9.8	10.0	10.1	10.2	10.3	10.4	10.5	10.5	10.5	10.5	10.4	10.4	10.2	10.0	9.8	9.4	9.0	8.2
	Ws (m/s)	19.3	20.1	20.8	21.2	22.0	22.4	23.1	23.4	23.7	24.4	24.7	24.8	25.1	25.1	25.1	24.8	24.4	23.3
	Cs(m/s)	0.6	0.6	0.6	0.6	0.7	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 23 of 129

Title: METOCEAN DATA

5.1.11 Single Peak Wave Extreme Hs x Tp curves for SSW Direction

Table with 21 columns (Return Period, Tp1(s), Hs(m), Ws(m/s), Cs(m/s)) and 18 rows (Return Periods: 1, 10, 20, 30, 50, 100, 1000).

Table with 19 columns (Return Period, Tp1(s), Hs(m), Ws(m/s), Cs(m/s)) and 18 rows (Return Periods: 1, 10, 20, 30, 50, 100, 1000).

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 24 of 129

Title: METOCEAN DATA

5.1.12 Single Peak Wave Extreme Hs x Tp curves for SW Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0
1	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.9	5.2	5.5	5.7	6.0	6.2	6.4	6.6	6.8	6.8	6.9	6.8	6.7
	Ws (m/s)	5.7	4.8	5.1	5.9	6.9	8.3	9.3	9.9	10.7	11.4	12.2	12.8	13.6	14.3	15.0	15.6	16.1	15.6	14.5
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.1
10	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.1	7.4	7.6	7.9	8.2	8.4	8.6	8.8	8.9	9.0
	Ws (m/s)	4.1	4.3	5.0	5.9	6.9	8.1	9.5	11.1	12.9	13.7	14.3	14.9	15.4	16.3	16.8	17.3	18.0	18.4	19.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.0	0.1	0.1	0.2	0.2	0.2	0.3	0.3	0.3
20	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	7.8	8.1	8.3	8.6	8.8	9.0	9.2	9.4	9.5
	Ws (m/s)	4.0	4.3	5.0	5.9	6.9	8.1	9.5	11.0	12.7	14.2	15.0	15.6	16.2	16.8	17.4	18.0	18.5	19.0	19.4
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.3	0.3
30	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	7.9	8.2	8.5	8.7	9.0	9.2	9.4	9.6	9.8
	Ws (m/s)	3.9	4.3	5.0	5.9	6.9	8.1	9.5	11.0	12.7	14.1	15.0	15.7	16.4	17.0	17.6	18.2	18.7	19.3	19.7
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.3	0.3
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	8.1	8.5	8.8	8.9	9.2	9.5	9.7	9.9	10.1
	Ws (m/s)	3.8	4.3	5.0	5.9	6.9	8.1	9.4	10.9	12.6	14.0	15.4	16.2	16.9	17.3	17.9	18.5	19.1	19.7	20.2
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.3	0.3	0.3
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	8.1	8.7	9.1	9.4	9.5	9.8	10.1	10.3	10.4
	Ws (m/s)	3.8	4.2	5.0	5.9	6.9	8.1	9.4	10.9	12.5	13.8	15.2	16.5	17.3	18.0	18.3	19.0	19.7	20.3	20.5
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.2	0.3	0.3	0.3	0.4
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	8.1	8.8	9.4	10.0	10.5	10.9	11.1	11.3	11.6
	Ws (m/s)	3.6	4.2	4.9	5.9	6.9	8.1	9.4	10.8	12.3	13.6	14.9	16.2	17.5	18.8	19.9	20.7	21.1	21.7	22.2
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.4

Return Period (Years)	Tp1(s)	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0	17.5	18.0	18.5	19.0	19.5	20.0
1	Hs(m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	9.1	9.2	9.2	9.1	9.0	8.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	19.5	19.9	19.9	19.3	18.6	17.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.4	0.4	0.3	0.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20	Hs(m)	9.7	9.7	9.8	9.8	9.8	9.7	9.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	20.0	20.4	20.8	21.1	20.6	20.0	18.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.4	0.4	0.4	0.4	0.4	0.3	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30	Hs(m)	9.9	10.0	10.1	10.2	10.2	10.1	9.9	9.5	0.0	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	20.2	20.8	21.2	21.6	21.6	21.0	20.4	19.0	0.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.4	0.4	0.5	0.5	0.4	0.4	0.3	0.0	0.0	0.0	0.0	0.0	0.0
50	Hs(m)	10.2	10.4	10.5	10.6	10.6	10.6	10.5	10.3	9.9	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	20.7	21.1	21.5	22.0	22.3	22.1	21.7	20.9	19.7	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.4	0.4	0.5	0.5	0.5	0.4	0.4	0.3	0.0	0.0	0.0	0.0	0.0
100	Hs(m)	10.6	10.8	10.9	11.0	11.1	11.2	11.2	11.1	10.9	10.6	0.0	0.0	0.0	0.0
	Ws (m/s)	21.1	21.6	22.1	22.5	23.0	23.4	23.4	22.8	22.1	21.1	0.0	0.0	0.0	0.0
	Cs(m/s)	0.4	0.4	0.4	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.0	0.0	0.0	0.0
1000	Hs(m)	11.7	12.0	12.1	12.4	12.6	12.6	12.8	12.9	12.9	13.0	12.9	12.8	12.6	12.3
	Ws (m/s)	22.6	23.3	23.6	24.2	24.7	25.0	25.5	25.8	26.1	26.3	26.1	25.6	25.0	23.9
	Cs(m/s)	0.4	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.7	0.6	0.6	0.6	0.5

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **25 of 129**

Title: **METOCEAN DATA**

5.1.13 Single Peak Wave Extreme Hs x Tp curves for WSW Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.0	12.5	13.0
1	Hs(m)	0.0	0.0	2.2	2.8	3.2	3.6	4.0	4.3	4.7	5.0	5.2	5.4	5.5	5.5	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	3.6	4.5	5.6	6.7	7.9	9.0	10.3	11.7	13.1	14.5	16.3	15.9	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.3	0.2	0.0	0.0	0.0	0.0
10	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.2	4.6	4.9	5.3	5.6	5.8	6.1	6.4	6.6	6.8	6.9	6.9	0.0	0.0
	Ws (m/s)	3.0	3.2	4.2	5.5	7.0	8.2	9.4	10.3	11.5	12.7	13.6	14.7	15.8	17.1	18.2	19.4	19.4	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.0	0.0
20	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.4	4.8	5.1	5.5	5.7	6.0	6.3	6.6	6.8	7.0	7.1	7.2	7.2	0.0
	Ws (m/s)	3.0	3.2	4.2	5.5	7.1	8.7	9.7	10.7	12.0	12.9	13.9	15.1	16.3	17.3	18.3	19.4	20.5	19.8	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.0
30	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.8	5.2	5.5	5.8	6.1	6.4	6.7	6.9	7.1	7.3	7.4	7.4	7.2
	Ws (m/s)	3.0	3.1	4.2	5.5	7.1	8.9	9.9	10.9	11.9	12.9	14.2	15.1	16.3	17.2	18.3	19.4	20.4	20.6	18.7
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.3
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.9	5.3	5.6	5.9	6.2	6.5	6.8	7.0	7.2	7.4	7.6	7.6	7.6
	Ws (m/s)	3.0	3.1	4.2	5.5	7.1	8.9	10.1	11.1	12.2	13.2	14.2	15.2	16.5	17.4	18.5	19.5	20.5	21.4	20.5
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.5	0.4
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.0	5.4	5.8	6.1	6.4	6.6	7.0	7.2	7.4	7.6	7.8	7.9	7.9
	Ws (m/s)	3.0	3.1	4.2	5.5	7.1	8.8	10.4	11.5	12.6	13.7	14.7	15.4	16.8	17.7	18.6	19.7	20.6	21.6	22.2
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.5	0.5
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.8	6.1	6.4	6.8	7.0	7.4	7.7	7.9	8.1	8.3	8.5	8.7
	Ws (m/s)	3.0	3.1	4.2	5.5	7.0	8.8	10.7	12.5	13.4	14.2	15.4	16.2	17.4	18.5	19.1	20.1	21.1	21.9	22.9
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.3	0.4	0.4	0.5	0.5

EIW1 2022-02-07T18:22:29

Return Period (Years)	Tp1(s)	13.5	14.0	14.5
1	Hs(m)	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0
10	Hs(m)	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0
20	Hs(m)	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0
30	Hs(m)	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0
50	Hs(m)	0.0	0.0	0.0
	Ws (m/s)	0.0	0.0	0.0
	Cs(m/s)	0.0	0.0	0.0
100	Hs(m)	7.8	0.0	0.0
	Ws (m/s)	23.0	0.0	0.0
	Cs(m/s)	0.6	0.0	0.0
1000	Hs(m)	8.7	8.8	8.7
	Ws (m/s)	23.7	24.0	23.1
	Cs(m/s)	0.6	0.6	0.5

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 26 of 129

Title: METOCEAN DATA

5.1.14 Single Peak Wave Extreme Hs x Tp curves for W Direction

Table with 20 columns (Return Period, Tp1(s), 4.0 to 13.0) and 18 rows (Return Periods 1, 10, 20, 30, 50, 100, 1000). Each return period has three rows for Hs(m), Ws (m/s), and Cs(m/s).

5.1.15 Single Peak Wave Extreme Hs x Tp curves for WNW Direction

Table with 17 columns (Return Period, Tp1(s), 4.0 to 11.5) and 18 rows (Return Periods 1, 10, 20, 30, 50, 100, 1000). Each return period has three rows for Hs(m), Ws (m/s), and Cs(m/s).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **27 of 129**

Title: **METOCEAN DATA**

5.1.16 Single Peak Wave Extreme Hs x Tp curves for NW Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5	11.0
1	Hs(m)	1.7	2.1	2.7	3.2	3.6	3.7	3.7	3.7	3.6	3.2	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	4.4	5.8	7.9	10.8	13.3	14.6	15.8	15.4	14.1	11.0	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.2	0.3	0.2	0.2	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.2	4.3	4.3	4.3	4.3	4.2	3.8	0.0	0.0	0.0
	Ws (m/s)	4.1	5.8	7.8	10.3	13.6	16.7	17.4	18.3	18.3	17.1	15.9	13.6	0.0	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.3	0.4	0.4	0.4	0.3	0.3	0.1	0.0	0.0	0.0
20	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.4	4.4	4.5	4.5	4.4	4.4	4.2	3.5	0.0	0.0
	Ws (m/s)	4.1	5.8	7.8	10.3	13.4	17.2	18.0	18.6	18.9	18.0	17.0	15.5	11.6	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.4	0.4	0.4	0.5	0.4	0.3	0.2	0.0	0.0	0.0
30	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.5	4.6	4.6	4.5	4.5	4.3	3.9	0.0	0.0
	Ws (m/s)	4.1	5.8	7.8	10.3	13.3	17.5	18.2	18.9	19.2	18.5	17.5	16.2	13.9	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.4	0.4	0.5	0.5	0.4	0.4	0.3	0.1	0.0	0.0
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.6	4.7	4.7	4.6	4.6	4.5	4.2	0.0	0.0
	Ws (m/s)	4.1	5.8	7.8	10.2	13.2	17.4	18.5	19.4	19.4	18.9	18.2	17.1	15.2	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.4	0.4	0.5	0.5	0.5	0.4	0.3	0.2	0.0	0.0
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.7	4.8	4.8	4.8	4.7	4.6	4.4	3.9	0.0
	Ws (m/s)	4.1	5.8	7.8	10.2	13.1	17.0	19.0	19.6	20.1	19.8	19.0	17.9	16.5	13.7	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.3	0.5	0.5	0.5	0.5	0.5	0.4	0.3	0.1	0.0
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	5.1	5.1	5.1	5.1	5.1	5.1	5.0	4.8	4.5
	Ws (m/s)	4.0	5.8	7.8	10.2	12.9	16.3	20.3	20.7	21.3	21.3	20.9	20.3	19.3	18.2	16.1
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.3	0.5	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.4

5.1.17 Single Peak Wave Extreme Hs x Tp curves for NNW Direction

Return Period (Years)	Tp1(s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5
1	Hs(m)	1.7	2.1	2.7	3.1	3.3	3.4	3.4	0.0	0.0	0.0	0.0	0.0
	Ws (m/s)	3.0	3.0	4.7	8.2	11.0	13.8	14.5	0.0	0.0	0.0	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.3	0.3	0.0	0.0	0.0	0.0	0.0
10	Hs(m)	1.7	2.1	2.7	3.2	3.8	3.9	4.0	4.1	4.0	0.0	0.0	0.0
	Ws (m/s)	3.0	3.0	4.5	8.2	13.0	14.9	17.1	17.7	15.2	0.0	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.2	0.3	0.4	0.5	0.3	0.0	0.0	0.0
20	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.1	4.2	4.2	4.2	3.8	0.0	0.0
	Ws (m/s)	3.0	3.0	4.5	8.0	12.9	15.4	17.3	18.5	16.9	12.4	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.2	0.3	0.4	0.5	0.4	0.1	0.0	0.0
30	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.1	4.2	4.3	4.3	4.0	0.0	0.0
	Ws (m/s)	3.0	3.0	4.5	8.0	12.6	15.8	17.5	18.9	17.7	14.4	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.3	0.4	0.5	0.4	0.2	0.0	0.0
50	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.2	4.3	4.4	4.4	4.2	0.0	0.0
	Ws (m/s)	3.0	3.0	4.4	7.9	12.4	15.9	17.7	19.4	18.6	15.9	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.3	0.4	0.5	0.5	0.3	0.0	0.0
100	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.3	4.4	4.5	4.5	4.4	0.0	0.0
	Ws (m/s)	3.0	3.0	4.4	7.8	12.1	16.6	18.2	19.8	19.8	17.7	0.0	0.0
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.3	0.4	0.5	0.5	0.4	0.0	0.0
1000	Hs(m)	1.7	2.1	2.7	3.2	3.8	4.5	4.7	4.8	4.9	4.9	4.7	4.2
	Ws (m/s)	3.0	3.0	4.4	7.7	11.6	16.8	19.3	20.9	21.7	21.3	19.3	14.2
	Cs(m/s)	0.1	0.1	0.1	0.1	0.1	0.3	0.5	0.6	0.6	0.6	0.5	0.2

OBS: Significant wave heights Hs of sea states with low spectral peak periods Tp were limited using steepness criteria provided by Recommended Practice DNV-RP-C205, April 2007, pag. 33

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

5.2 Extreme Double Peak Wave Criteria

There are a high percentage of double peak wave spectra at Santos Basin due to sea conditions associated with local blowing winds and swell conditions associated with southern extra-tropical cyclones. These spectra are usually characterized by a peak associated with sea component with frequency higher than 0.1 Hz and a peak associated with swell component with frequency lower than 0.1 Hz. Under some conditions, one of these peaks may be associated with a local storm generating an extreme double peak wave condition.

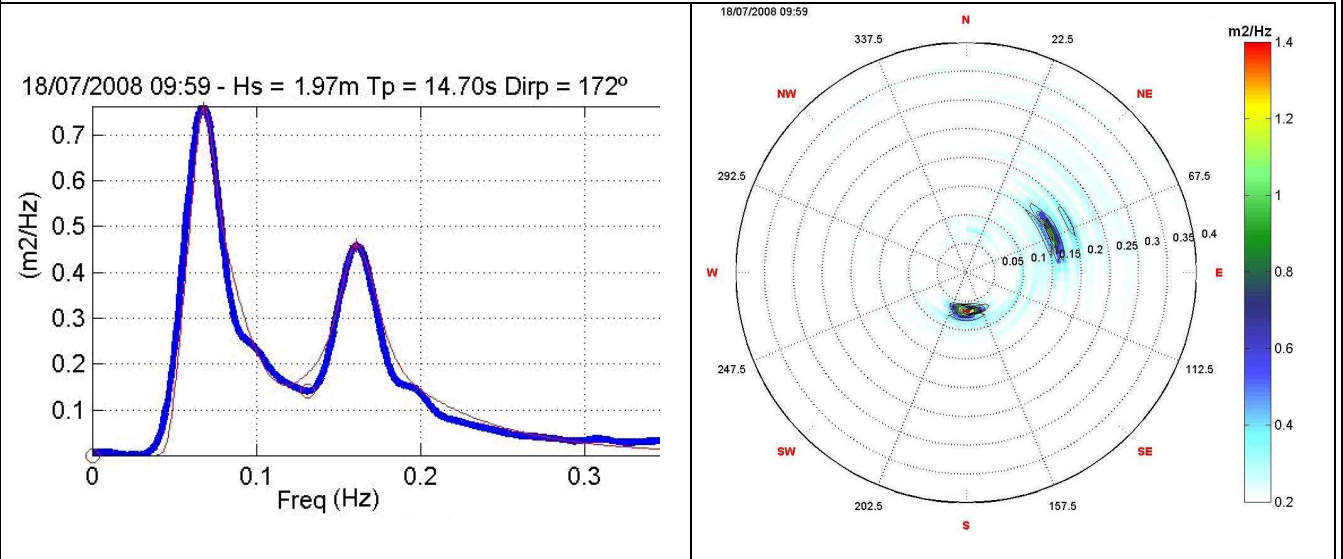


Figure 5.2.1 Typical double peak spectrum with dominant southern swell wave state.

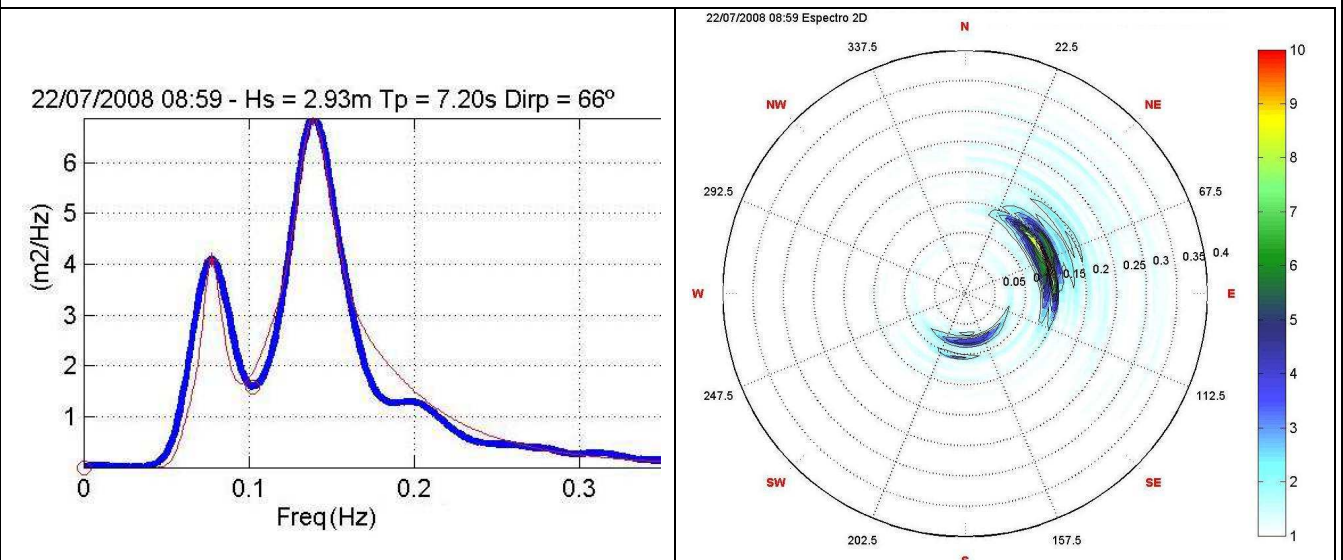


Figure 5.2.2 Typical double peak spectrum with dominant northeast sea wave state.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 29 of 129

Title: METOCEAN DATA

It is presented below extreme curves of first spectral peak (Hs1, Tp1) and associated second spectral peak (Hs2, Tp2) for some double peak seastates where the directions of both primary and secondary components are separated by a right angle (90°). These are situations that can affect motion of units that may be aligned with one of these directions. It is only possible to calculate double-peak curves that have directions associated with existing meteorological and oceanographic local conditions. Thus, it is not possible to calculate curves for sixteen directions as it is done for single peak extreme seastates.

5.2.1 Double Peak Extreme Hs x Tp curves for Primary N Direction and Secondary E Direction

Table with 15 columns: Return Period (Years), Tp1 (s), 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5, 9.0, 9.5, 10.0. Rows include Hs1 (m), Hs2 (m), and Tp2 (s) for return periods of 1, 10, 20, 30, 50, 100, and 1000 years.

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **30 of 129**

Title: **METOCEAN DATA**

5.2.2 Double Peak Extreme Hs x Tp curves for Primary NE Direction and Secondary SE Direction

Return Period (Years)	Tp1 (s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0
1	Hs1 (m)	0.0	2.1	2.7	3.1	3.3	3.5	3.7	3.8	3.9	4.0	4.0	3.9	3.7
	Hs2 (m)	0.0	0.7	0.8	0.9	1.0	1.1	1.2	1.4	1.5	1.7	1.8	1.6	1.3
	Tp2 (s)	0.0	7.1	7.2	7.4	7.6	7.8	8.1	8.3	8.5	8.8	8.9	8.6	8.2
10	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.2	4.3	4.4	4.5	4.6	4.7	4.8	4.8
	Hs2 (m)	0.8	0.9	1.0	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.9	1.9
	Tp2 (s)	7.3	7.4	7.6	7.7	7.9	8.1	8.2	8.3	8.5	8.7	8.8	9.0	9.0
20	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.3	4.5	4.6	4.7	4.8	4.9	4.9	5.0
	Hs2 (m)	0.8	0.9	1.0	1.1	1.2	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9
	Tp2 (s)	7.4	7.5	7.6	7.8	8.0	8.1	8.2	8.4	8.5	8.7	8.8	8.9	9.1
30	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.4	4.6	4.7	4.8	4.9	5.0	5.0	5.1
	Hs2 (m)	0.9	0.9	1.0	1.1	1.2	1.3	1.4	1.4	1.5	1.6	1.7	1.8	1.9
	Tp2 (s)	7.4	7.5	7.7	7.8	8.0	8.1	8.3	8.4	8.5	8.7	8.8	8.9	9.1
50	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	4.6	4.8	4.9	5.0	5.1	5.2	5.2
	Hs2 (m)	0.9	1.0	1.0	1.1	1.2	1.3	1.4	1.5	1.5	1.6	1.7	1.8	1.9
	Tp2 (s)	7.5	7.6	7.7	7.9	8.0	8.1	8.3	8.4	8.5	8.7	8.8	8.9	9.1
100	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	4.8	4.9	5.1	5.2	5.3	5.3	5.4
	Hs2 (m)	0.9	1.0	1.1	1.1	1.2	1.3	1.4	1.5	1.6	1.6	1.7	1.8	1.9
	Tp2 (s)	7.5	7.7	7.8	7.9	8.0	8.2	8.3	8.4	8.6	8.7	8.8	8.9	9.1
1000	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.3	5.5	5.6	5.7	5.8	5.8
	Hs2 (m)	1.0	1.1	1.2	1.2	1.3	1.4	1.4	1.5	1.6	1.7	1.7	1.8	1.9
	Tp2 (s)	7.7	7.8	7.9	8.1	8.2	8.3	8.4	8.5	8.6	8.7	8.8	9.0	9.0

Return Period (Years)	Tp1 (s)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5
1	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs1 (m)	4.7	4.6	4.4	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	1.7	1.6	1.4	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	8.9	8.6	8.3	0.0	0.0	0.0	0.0	0.0	0.0
20	Hs1 (m)	4.9	4.9	4.8	4.4	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	1.8	1.7	1.6	1.3	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	9.0	8.8	8.6	8.2	0.0	0.0	0.0	0.0	0.0
30	Hs1 (m)	5.1	5.0	4.9	4.7	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	1.9	1.8	1.6	1.4	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	9.1	8.9	8.7	8.4	0.0	0.0	0.0	0.0	0.0
50	Hs1 (m)	5.2	5.2	5.1	5.0	4.6	0.0	0.0	0.0	0.0
	Hs2 (m)	1.9	1.8	1.7	1.6	1.4	0.0	0.0	0.0	0.0
	Tp2 (s)	9.1	9.0	8.8	8.6	8.3	0.0	0.0	0.0	0.0
100	Hs1 (m)	5.4	5.4	5.3	5.2	5.0	4.5	0.0	0.0	0.0
	Hs2 (m)	2.0	1.9	1.8	1.7	1.5	1.2	0.0	0.0	0.0
	Tp2 (s)	9.2	9.1	8.9	8.7	8.5	8.1	0.0	0.0	0.0
1000	Hs1 (m)	5.9	5.9	5.9	5.9	5.8	5.7	5.4	4.9	0.0
	Hs2 (m)	2.0	2.0	2.0	1.9	1.8	1.7	1.6	1.3	0.0
	Tp2 (s)	9.1	9.2	9.2	9.1	9.0	8.8	8.6	8.2	0.0

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **31 of 129**

Title: **METOCEAN DATA**

5.2.3 Double Peak Extreme Hs x Tp curves for Primary E Direction and Secondary S Direction

Return Period (Years)	Tp1 (s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0
1	Hs1 (m)	0.0	0.0	0.0	2.1	2.6	2.9	3.1	3.3	3.5	3.6	3.6	3.6	3.4
	Hs2 (m)	0.0	0.0	0.0	0.0	0.2	0.3	0.5	0.6	0.8	1.0	1.2	1.0	0.7
	Tp2 (s)	0.0	0.0	0.0	5.4	5.8	6.1	6.6	7.1	7.7	8.2	8.7	8.1	7.2
10	Hs1 (m)	0.0	2.1	2.7	3.0	3.3	3.6	3.9	4.1	4.3	4.4	4.5	4.6	4.6
	Hs2 (m)	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.8	0.9	1.0	1.1	1.3	1.3
	Tp2 (s)	0.0	5.5	5.8	6.0	6.3	6.7	7.1	7.4	7.8	8.2	8.6	9.0	9.0
20	Hs1 (m)	1.7	2.1	2.7	3.2	3.5	3.9	4.1	4.3	4.5	4.7	4.8	4.8	4.9
	Hs2 (m)	0.0	0.1	0.2	0.3	0.4	0.6	0.7	0.8	0.9	1.0	1.2	1.3	1.3
	Tp2 (s)	5.4	5.6	5.9	6.2	6.4	6.8	7.1	7.5	7.9	8.3	8.6	9.0	9.2
30	Hs1 (m)	1.7	2.1	2.7	3.2	3.7	4.0	4.2	4.5	4.6	4.8	4.9	5.0	5.0
	Hs2 (m)	0.1	0.1	0.2	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.3	1.4
	Tp2 (s)	5.5	5.7	6.0	6.3	6.5	6.9	7.2	7.6	7.8	8.2	8.6	9.0	9.3
50	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.1	4.4	4.5	4.8	4.9	5.1	5.1	5.2
	Hs2 (m)	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.2	1.3	1.4
	Tp2 (s)	5.6	5.8	6.0	6.4	6.6	6.9	7.2	7.5	7.9	8.3	8.7	8.9	9.5
100	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.3	4.5	4.7	5.0	5.1	5.3	5.4	5.4
	Hs2 (m)	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	1.0	1.0	1.2	1.3	1.4
	Tp2 (s)	5.7	5.9	6.2	6.4	6.7	7.1	7.3	7.6	8.0	8.3	8.7	9.0	9.4
1000	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.1	5.3	5.5	5.7	5.9	6.0	6.1
	Hs2 (m)	0.3	0.4	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4
	Tp2 (s)	6.0	6.2	6.5	6.7	7.0	7.3	7.6	7.9	8.2	8.5	8.7	9.0	9.4

Return Period (Years)	Tp1 (s)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0
1	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs1 (m)	4.5	4.4	3.9	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	1.1	0.9	0.6	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	8.6	8.0	7.0	0.0	0.0	0.0	0.0	0.0
20	Hs1 (m)	4.8	4.7	4.5	3.5	0.0	0.0	0.0	0.0
	Hs2 (m)	1.3	1.1	0.9	0.4	0.0	0.0	0.0	0.0
	Tp2 (s)	9.0	8.4	7.8	6.4	0.0	0.0	0.0	0.0
30	Hs1 (m)	5.0	4.9	4.7	4.2	0.0	0.0	0.0	0.0
	Hs2 (m)	1.3	1.2	1.0	0.7	0.0	0.0	0.0	0.0
	Tp2 (s)	9.1	8.7	8.0	7.2	0.0	0.0	0.0	0.0
50	Hs1 (m)	5.2	5.1	5.0	4.7	0.0	0.0	0.0	0.0
	Hs2 (m)	1.4	1.3	1.1	0.9	0.0	0.0	0.0	0.0
	Tp2 (s)	9.5	8.9	8.4	7.7	0.0	0.0	0.0	0.0
100	Hs1 (m)	5.4	5.4	5.3	5.1	4.5	0.0	0.0	0.0
	Hs2 (m)	1.4	1.4	1.2	1.0	0.7	0.0	0.0	0.0
	Tp2 (s)	9.5	9.3	8.8	8.2	7.3	0.0	0.0	0.0
1000	Hs1 (m)	6.2	6.2	6.2	6.1	5.9	5.6	4.9	0.0
	Hs2 (m)	1.5	1.6	1.5	1.4	1.2	1.0	0.7	0.0
	Tp2 (s)	9.7	9.9	9.7	9.3	8.9	8.3	7.4	0.0

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **32 of 129**

Title: **METOCEAN DATA**

5.2.4 Double Peak Extreme Hs x Tp curves for Primary SE Direction and Secondary NE Direction

Return Period (Years)	Tp1 (s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0	10.5
1	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	1.8	2.0	2.2	2.3	2.4	2.6	2.6	2.7	2.8
	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.3	0.4	0.5	0.6	0.7	0.9	1.0	1.1	1.2
	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	6.2	6.4	6.7	6.9	7.2	7.4	7.6	7.9	8.1
10	Hs1 (m)	0.0	1.6	1.9	2.1	2.3	2.5	2.6	2.8	2.9	3.0	3.1	3.2	3.3	3.4
	Hs2 (m)	0.0	0.2	0.3	0.4	0.5	0.6	0.7	0.9	1.0	1.0	1.1	1.3	1.4	1.5
	Tp2 (s)	0.0	6.0	6.3	6.5	6.8	7.0	7.2	7.4	7.6	7.7	7.9	8.1	8.3	8.4
20	Hs1 (m)	1.6	1.9	2.1	2.3	2.5	2.6	2.8	2.9	3.0	3.1	3.2	3.3	3.4	3.5
	Hs2 (m)	0.2	0.3	0.4	0.5	0.7	0.7	0.9	1.0	1.0	1.1	1.2	1.3	1.4	1.5
	Tp2 (s)	6.0	6.3	6.5	6.7	7.0	7.2	7.4	7.6	7.7	7.9	8.1	8.2	8.4	8.5
30	Hs1 (m)	1.7	2.0	2.2	2.4	2.6	2.7	2.9	3.0	3.1	3.2	3.3	3.4	3.5	3.6
	Hs2 (m)	0.2	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.5
	Tp2 (s)	6.2	6.4	6.7	6.9	7.1	7.3	7.5	7.6	7.8	7.9	8.1	8.3	8.4	8.5
50	Hs1 (m)	1.7	2.1	2.3	2.5	2.7	2.8	2.9	3.1	3.2	3.3	3.4	3.5	3.6	3.7
	Hs2 (m)	0.3	0.4	0.5	0.7	0.8	0.9	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6
	Tp2 (s)	6.3	6.5	6.8	7.0	7.2	7.4	7.5	7.7	7.9	8.1	8.2	8.3	8.5	8.6
100	Hs1 (m)	1.7	2.1	2.5	2.7	2.8	3.0	3.1	3.2	3.3	3.4	3.5	3.6	3.7	3.8
	Hs2 (m)	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.4	1.5	1.6
	Tp2 (s)	6.5	6.8	7.0	7.2	7.3	7.5	7.7	7.8	8.0	8.1	8.3	8.4	8.5	8.7
1000	Hs1 (m)	1.7	2.1	2.7	3.0	3.2	3.3	3.4	3.6	3.7	3.8	3.9	4.0	4.1	4.2
	Hs2 (m)	0.7	0.8	0.9	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.5	1.6	1.7	1.8
	Tp2 (s)	7.0	7.2	7.4	7.6	7.7	7.9	8.0	8.2	8.3	8.5	8.5	8.7	8.8	8.9

Return Period (Years)	Tp1 (s)	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0	17.5
1	Hs1 (m)	2.8	2.9	2.9	2.9	2.9	2.8	2.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	1.4	1.5	1.6	1.6	1.4	1.2	1.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	8.3	8.4	8.7	8.7	8.4	8.0	7.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs1 (m)	3.4	3.5	3.5	3.5	3.5	3.6	3.5	3.5	3.4	3.3	3.1	0.0	0.0	0.0
	Hs2 (m)	1.5	1.6	1.7	1.8	1.9	1.9	1.8	1.7	1.6	1.4	1.2	0.0	0.0	0.0
	Tp2 (s)	8.5	8.7	8.8	8.9	9.0	9.1	8.9	8.8	8.6	8.4	8.0	0.0	0.0	0.0
20	Hs1 (m)	3.6	3.6	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.6	3.5	3.3	0.0	0.0
	Hs2 (m)	1.6	1.7	1.8	1.8	1.9	2.0	2.0	1.9	1.8	1.7	1.5	1.3	0.0	0.0
	Tp2 (s)	8.6	8.7	8.9	9.0	9.1	9.2	9.2	9.0	8.9	8.7	8.5	8.1	0.0	0.0
30	Hs1 (m)	3.6	3.7	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.7	3.6	3.5	3.2	0.0
	Hs2 (m)	1.6	1.7	1.8	1.9	1.9	2.0	2.0	1.9	1.9	1.7	1.6	1.4	1.2	0.0
	Tp2 (s)	8.6	8.8	8.9	9.0	9.1	9.2	9.2	9.1	9.0	8.8	8.6	8.4	7.9	0.0
50	Hs1 (m)	3.7	3.8	3.8	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.8	3.7	3.5	3.1
	Hs2 (m)	1.6	1.7	1.8	1.9	2.0	2.0	2.0	2.0	2.0	1.8	1.7	1.6	1.4	1.1
	Tp2 (s)	8.7	8.8	9.0	9.0	9.1	9.3	9.3	9.3	9.1	9.0	8.8	8.7	8.3	7.8
100	Hs1 (m)	3.9	3.9	4.0	4.0	4.1	4.1	4.1	4.1	4.1	4.1	4.0	3.9	3.8	3.6
	Hs2 (m)	1.7	1.8	1.8	1.9	2.0	2.1	2.2	2.2	2.1	2.0	1.9	1.8	1.6	1.4
	Tp2 (s)	8.8	8.9	9.0	9.1	9.2	9.3	9.4	9.4	9.3	9.2	9.1	8.9	8.7	8.4
1000	Hs1 (m)	4.2	4.3	4.4	4.4	4.5	4.5	4.5	4.6	4.6	4.6	4.5	4.5	4.5	4.4
	Hs2 (m)	1.9	1.9	2.0	2.0	2.1	2.2	2.2	2.3	2.3	2.3	2.3	2.2	2.1	2.0
	Tp2 (s)	9.0	9.1	9.2	9.3	9.3	9.4	9.5	9.6	9.6	9.6	9.5	9.5	9.3	9.2

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 33 of 129

Title: METOCEAN DATA

5.2.5 Double Peak Extreme Hs x Tp curves for Primary SE Direction and Secondary SW Direction

Table with 15 columns (Return Period, Tp1, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5, 9.0, 9.5, 10.0) and 15 rows (Return Periods 1, 10, 20, 30, 50, 100, 1000). Each row contains Hs1, Hs2, and Tp2 values.

Table with 15 columns (Return Period, Tp1, 10.5, 11.0, 11.5, 12.0, 12.5, 13.0, 13.5, 14.0, 14.5, 15.0, 15.5, 16.0, 16.5, 17.0) and 15 rows (Return Periods 1, 10, 20, 30, 50, 100, 1000). Each row contains Hs1, Hs2, and Tp2 values.

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 34 of 129

Title: METOCEAN DATA

Return Period (Years)	Tp1 (s)	17.5	18.0	18.5	19.0	19.5	20.0
1	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	0.0
20	Hs1 (m)	2.7	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	0.9	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	5.7	0.0	0.0	0.0	0.0	0.0
30	Hs1 (m)	3.1	2.4	0.0	0.0	0.0	0.0
	Hs2 (m)	1.0	0.7	0.0	0.0	0.0	0.0
	Tp2 (s)	6.3	5.0	0.0	0.0	0.0	0.0
50	Hs1 (m)	3.4	3.0	0.0	0.0	0.0	0.0
	Hs2 (m)	1.2	1.0	0.0	0.0	0.0	0.0
	Tp2 (s)	6.8	6.1	0.0	0.0	0.0	0.0
100	Hs1 (m)	3.6	3.4	3.1	0.0	0.0	0.0
	Hs2 (m)	1.4	1.2	1.0	0.0	0.0	0.0
	Tp2 (s)	7.3	6.8	6.2	0.0	0.0	0.0
1000	Hs1 (m)	4.5	4.3	4.1	3.9	3.6	3.2
	Hs2 (m)	1.8	1.7	1.6	1.4	1.3	1.1
	Tp2 (s)	8.5	8.2	7.9	7.5	7.0	6.4

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **35 of 129**

Title: **METOCEAN DATA**

5.2.6 Double Peak Extreme Hs x Tp curves for Primary S Direction and Secondary E Direction

Return Period (Years)	Tp1 (s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0
1	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	0.0	2.4	2.6	2.8	3.0	3.1	3.2	3.3
	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.6	0.7	0.8	0.9	1.0	1.1	1.2
	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	0.0	5.0	5.2	5.4	5.7	5.9	6.1	6.4
10	Hs1 (m)	0.0	2.1	2.4	2.7	2.9	3.1	3.2	3.4	3.5	3.6	3.7	3.8	3.9
	Hs2 (m)	0.0	0.6	0.6	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.3	1.3
	Tp2 (s)	0.0	4.7	5.0	5.2	5.4	5.7	5.8	6.0	6.2	6.3	6.5	6.6	6.7
20	Hs1 (m)	1.7	2.1	2.7	2.9	3.1	3.2	3.4	3.5	3.7	3.8	3.9	4.0	4.1
	Hs2 (m)	0.6	0.6	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.3	1.3	1.4
	Tp2 (s)	4.7	5.0	5.2	5.4	5.6	5.8	6.0	6.1	6.3	6.4	6.6	6.7	6.9
30	Hs1 (m)	1.7	2.1	2.7	3.0	3.2	3.3	3.5	3.6	3.8	3.9	4.0	4.1	4.2
	Hs2 (m)	0.6	0.7	0.8	0.8	0.9	1.0	1.0	1.1	1.2	1.2	1.3	1.4	1.4
	Tp2 (s)	4.9	5.1	5.4	5.5	5.7	5.9	6.1	6.2	6.4	6.5	6.6	6.8	6.9
50	Hs1 (m)	1.7	2.1	2.7	3.2	3.3	3.5	3.6	3.7	3.8	4.0	4.1	4.2	4.3
	Hs2 (m)	0.7	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.3	1.3	1.4	1.4
	Tp2 (s)	5.1	5.3	5.5	5.7	5.9	6.0	6.2	6.3	6.4	6.6	6.7	6.8	6.9
100	Hs1 (m)	1.7	2.1	2.7	3.2	3.5	3.6	3.8	3.9	4.0	4.1	4.2	4.3	4.4
	Hs2 (m)	0.7	0.8	0.9	0.9	1.0	1.0	1.1	1.2	1.2	1.3	1.4	1.4	1.5
	Tp2 (s)	5.3	5.5	5.7	5.9	6.0	6.1	6.3	6.4	6.6	6.7	6.8	6.9	7.0
1000	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.1	4.2	4.3	4.4	4.5	4.6	4.7	4.8
	Hs2 (m)	0.9	1.0	1.0	1.1	1.2	1.2	1.3	1.3	1.4	1.4	1.5	1.5	1.6
	Tp2 (s)	5.8	6.0	6.1	6.3	6.4	6.5	6.6	6.7	6.8	6.9	7.0	7.1	7.2

Return Period (Years)	Tp1 (s)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0
1	Hs1 (m)	3.4	3.5	3.5	3.6	3.6	3.6	3.6	3.6	3.6	3.5	3.4	0.0	0.0	0.0
	Hs2 (m)	1.3	1.3	1.4	1.5	1.6	1.7	1.7	1.9	2.0	2.1	2.2	0.0	0.0	0.0
	Tp2 (s)	6.6	6.7	6.9	7.1	7.2	7.4	7.4	7.6	7.7	7.8	7.9	0.0	0.0	0.0
10	Hs1 (m)	4.0	4.1	4.1	4.2	4.2	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.2	4.1
	Hs2 (m)	1.4	1.5	1.6	1.6	1.7	1.7	1.8	1.9	1.9	1.9	1.8	1.7	1.6	1.5
	Tp2 (s)	6.9	7.0	7.1	7.2	7.3	7.4	7.5	7.6	7.6	7.6	7.5	7.4	7.2	7.0
20	Hs1 (m)	4.2	4.2	4.3	4.3	4.4	4.4	4.5	4.5	4.5	4.5	4.5	4.5	4.4	4.3
	Hs2 (m)	1.5	1.5	1.6	1.6	1.7	1.8	1.8	1.9	2.0	2.0	1.9	1.8	1.7	1.6
	Tp2 (s)	7.0	7.1	7.2	7.3	7.3	7.5	7.5	7.6	7.7	7.7	7.6	7.5	7.4	7.3
30	Hs1 (m)	4.2	4.3	4.4	4.4	4.5	4.5	4.6	4.6	4.6	4.6	4.6	4.6	4.5	4.5
	Hs2 (m)	1.5	1.5	1.6	1.7	1.7	1.8	1.9	1.9	2.0	2.0	1.9	1.9	1.8	1.7
	Tp2 (s)	7.0	7.1	7.2	7.3	7.4	7.5	7.6	7.6	7.7	7.7	7.6	7.6	7.5	7.3
50	Hs1 (m)	4.3	4.4	4.5	4.5	4.6	4.6	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.6
	Hs2 (m)	1.5	1.6	1.6	1.7	1.8	1.8	1.9	1.9	2.0	2.0	2.0	1.9	1.9	1.8
	Tp2 (s)	7.1	7.1	7.2	7.3	7.4	7.5	7.6	7.6	7.7	7.7	7.7	7.7	7.6	7.5
100	Hs1 (m)	4.5	4.5	4.6	4.7	4.7	4.7	4.8	4.8	4.8	4.8	4.8	4.8	4.8	4.8
	Hs2 (m)	1.5	1.6	1.7	1.7	1.8	1.8	1.9	1.9	2.0	2.1	2.1	2.0	2.0	1.9
	Tp2 (s)	7.1	7.2	7.3	7.4	7.4	7.5	7.6	7.6	7.7	7.8	7.8	7.7	7.7	7.6
1000	Hs1 (m)	4.9	4.9	5.0	5.1	5.1	5.1	5.2	5.2	5.2	5.3	5.3	5.3	5.3	5.3
	Hs2 (m)	1.7	1.7	1.8	1.8	1.8	1.9	2.0	2.0	2.0	2.1	2.1	2.2	2.1	2.1
	Tp2 (s)	7.3	7.3	7.4	7.5	7.5	7.6	7.7	7.7	7.8	7.8	7.9	7.9	7.9	7.8

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **36 of 129**

Title: **METOCEAN DATA**

Return Period (Years)	Tp1 (s)	17.5	18.0	18.5	19.0	19.5	20.0	20.5	21.0	21.5																																																																																																																																																																																																																									
		<table border="1"> <tr> <td rowspan="3">1</td> <td>Hs1 (m)</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Hs2 (m)</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Tp2 (s)</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td rowspan="3">10</td> <td>Hs1 (m)</td> <td>3.9</td> <td>3.7</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Hs2 (m)</td> <td>1.4</td> <td>1.2</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Tp2 (s)</td> <td>6.8</td> <td>6.4</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td rowspan="3">20</td> <td>Hs1 (m)</td> <td>4.2</td> <td>4.1</td> <td>3.8</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Hs2 (m)</td> <td>1.5</td> <td>1.4</td> <td>1.2</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.1</td> <td>6.9</td> <td>6.5</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td rowspan="3">30</td> <td>Hs1 (m)</td> <td>4.4</td> <td>4.3</td> <td>4.1</td> <td>3.8</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Hs2 (m)</td> <td>1.6</td> <td>1.5</td> <td>1.4</td> <td>1.2</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.2</td> <td>7.0</td> <td>6.8</td> <td>6.4</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td rowspan="3">50</td> <td>Hs1 (m)</td> <td>4.5</td> <td>4.5</td> <td>4.3</td> <td>4.1</td> <td>3.7</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Hs2 (m)</td> <td>1.7</td> <td>1.6</td> <td>1.5</td> <td>1.4</td> <td>1.1</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.4</td> <td>7.2</td> <td>7.1</td> <td>6.8</td> <td>6.3</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td rowspan="3">100</td> <td>Hs1 (m)</td> <td>4.7</td> <td>4.7</td> <td>4.6</td> <td>4.4</td> <td>4.2</td> <td>3.8</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Hs2 (m)</td> <td>1.8</td> <td>1.7</td> <td>1.6</td> <td>1.5</td> <td>1.4</td> <td>1.2</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.5</td> <td>7.4</td> <td>7.2</td> <td>7.1</td> <td>6.8</td> <td>6.4</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> </tr> <tr> <td rowspan="3">1000</td> <td>Hs1 (m)</td> <td>5.2</td> <td>5.2</td> <td>5.2</td> <td>5.1</td> <td>5.0</td> <td>4.9</td> <td>4.7</td> <td>4.5</td> <td>4.2</td> </tr> <tr> <td>Hs2 (m)</td> <td>2.0</td> <td>2.0</td> <td>1.9</td> <td>1.8</td> <td>1.8</td> <td>1.7</td> <td>1.6</td> <td>1.4</td> <td>1.3</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.8</td> <td>7.7</td> <td>7.6</td> <td>7.5</td> <td>7.5</td> <td>7.3</td> <td>7.2</td> <td>6.9</td> <td>6.6</td> </tr> </table>											1	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	10	Hs1 (m)	3.9	3.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0	Hs2 (m)	1.4	1.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	Tp2 (s)	6.8	6.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	20	Hs1 (m)	4.2	4.1	3.8	0.0	0.0	0.0	0.0	0.0	0.0	Hs2 (m)	1.5	1.4	1.2	0.0	0.0	0.0	0.0	0.0	0.0	Tp2 (s)	7.1	6.9	6.5	0.0	0.0	0.0	0.0	0.0	0.0	30	Hs1 (m)	4.4	4.3	4.1	3.8	0.0	0.0	0.0	0.0	0.0	Hs2 (m)	1.6	1.5	1.4	1.2	0.0	0.0	0.0	0.0	0.0	Tp2 (s)	7.2	7.0	6.8	6.4	0.0	0.0	0.0	0.0	0.0	50	Hs1 (m)	4.5	4.5	4.3	4.1	3.7	0.0	0.0	0.0	0.0	Hs2 (m)	1.7	1.6	1.5	1.4	1.1	0.0	0.0	0.0	0.0	Tp2 (s)	7.4	7.2	7.1	6.8	6.3	0.0	0.0	0.0	0.0	100	Hs1 (m)	4.7	4.7	4.6	4.4	4.2	3.8	0.0	0.0	0.0	Hs2 (m)	1.8	1.7	1.6	1.5	1.4	1.2	0.0	0.0	0.0	Tp2 (s)	7.5	7.4	7.2	7.1	6.8	6.4	0.0	0.0	0.0	1000	Hs1 (m)	5.2	5.2	5.2	5.1	5.0	4.9	4.7	4.5	4.2	Hs2 (m)	2.0	2.0	1.9	1.8	1.8	1.7	1.6	1.4	1.3	Tp2 (s)	7.8	7.7	7.6	7.5	7.5	7.3	7.2
1	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
10	Hs1 (m)	3.9	3.7	0.0	0.0	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Hs2 (m)	1.4	1.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Tp2 (s)	6.8	6.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
20	Hs1 (m)	4.2	4.1	3.8	0.0	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Hs2 (m)	1.5	1.4	1.2	0.0	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Tp2 (s)	7.1	6.9	6.5	0.0	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
30	Hs1 (m)	4.4	4.3	4.1	3.8	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Hs2 (m)	1.6	1.5	1.4	1.2	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Tp2 (s)	7.2	7.0	6.8	6.4	0.0	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
50	Hs1 (m)	4.5	4.5	4.3	4.1	3.7	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Hs2 (m)	1.7	1.6	1.5	1.4	1.1	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
	Tp2 (s)	7.4	7.2	7.1	6.8	6.3	0.0	0.0	0.0	0.0																																																																																																																																																																																																																									
100	Hs1 (m)	4.7	4.7	4.6	4.4	4.2	3.8	0.0	0.0	0.0																																																																																																																																																																																																																									
	Hs2 (m)	1.8	1.7	1.6	1.5	1.4	1.2	0.0	0.0	0.0																																																																																																																																																																																																																									
	Tp2 (s)	7.5	7.4	7.2	7.1	6.8	6.4	0.0	0.0	0.0																																																																																																																																																																																																																									
1000	Hs1 (m)	5.2	5.2	5.2	5.1	5.0	4.9	4.7	4.5	4.2																																																																																																																																																																																																																									
	Hs2 (m)	2.0	2.0	1.9	1.8	1.8	1.7	1.6	1.4	1.3																																																																																																																																																																																																																									
	Tp2 (s)	7.8	7.7	7.6	7.5	7.5	7.3	7.2	6.9	6.6																																																																																																																																																																																																																									

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

5.2.7 Double Peak Wave Extreme Hs x Tp curves for Primary SW Direction and Secondary SE Direction

Return Period (Years)	Tp1 (s)	4.0	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.0	8.5	9.0	9.5	10.0																																																																																																																																																																																																																																																																																																													
		<table border="1"> <tr> <td rowspan="3">1</td> <td>Hs1 (m)</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>2.3</td> <td>2.8</td> <td>3.1</td> <td>3.3</td> <td>3.6</td> <td>3.8</td> <td>4.0</td> <td>4.2</td> <td>4.4</td> <td>4.5</td> </tr> <tr> <td>Hs2 (m)</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>0.7</td> <td>0.8</td> <td>0.9</td> <td>1.0</td> <td>1.1</td> <td>1.2</td> <td>1.3</td> <td>1.4</td> <td>1.5</td> <td>1.6</td> </tr> <tr> <td>Tp2 (s)</td> <td>0.0</td> <td>0.0</td> <td>0.0</td> <td>7.1</td> <td>7.3</td> <td>7.5</td> <td>7.6</td> <td>7.8</td> <td>8.0</td> <td>8.1</td> <td>8.3</td> <td>8.4</td> <td>8.6</td> </tr> <tr> <td rowspan="3">10</td> <td>Hs1 (m)</td> <td>1.7</td> <td>2.1</td> <td>2.7</td> <td>3.2</td> <td>3.8</td> <td>4.4</td> <td>4.6</td> <td>4.8</td> <td>5.1</td> <td>5.3</td> <td>5.5</td> <td>5.7</td> <td>5.8</td> </tr> <tr> <td>Hs2 (m)</td> <td>0.8</td> <td>0.9</td> <td>1.0</td> <td>1.1</td> <td>1.2</td> <td>1.3</td> <td>1.3</td> <td>1.4</td> <td>1.5</td> <td>1.6</td> <td>1.6</td> <td>1.7</td> <td>1.8</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.4</td> <td>7.5</td> <td>7.7</td> <td>7.8</td> <td>7.9</td> <td>8.1</td> <td>8.2</td> <td>8.3</td> <td>8.5</td> <td>8.6</td> <td>8.7</td> <td>8.8</td> <td>8.9</td> </tr> <tr> <td rowspan="3">20</td> <td>Hs1 (m)</td> <td>1.7</td> <td>2.1</td> <td>2.7</td> <td>3.2</td> <td>3.8</td> <td>4.5</td> <td>5.0</td> <td>5.2</td> <td>5.4</td> <td>5.6</td> <td>5.8</td> <td>6.0</td> <td>6.2</td> </tr> <tr> <td>Hs2 (m)</td> <td>0.9</td> <td>1.0</td> <td>1.1</td> <td>1.2</td> <td>1.3</td> <td>1.3</td> <td>1.4</td> <td>1.5</td> <td>1.6</td> <td>1.6</td> <td>1.7</td> <td>1.8</td> <td>1.9</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.5</td> <td>7.7</td> <td>7.8</td> <td>7.9</td> <td>8.1</td> <td>8.2</td> <td>8.3</td> <td>8.5</td> <td>8.6</td> <td>8.7</td> <td>8.8</td> <td>8.9</td> <td>9.0</td> </tr> <tr> <td rowspan="3">30</td> <td>Hs1 (m)</td> <td>1.7</td> <td>2.1</td> <td>2.7</td> <td>3.2</td> <td>3.8</td> <td>4.5</td> <td>5.1</td> <td>5.4</td> <td>5.6</td> <td>5.8</td> <td>6.0</td> <td>6.3</td> <td>6.4</td> </tr> <tr> <td>Hs2 (m)</td> <td>1.0</td> <td>1.0</td> <td>1.1</td> <td>1.2</td> <td>1.3</td> <td>1.4</td> <td>1.4</td> <td>1.5</td> <td>1.6</td> <td>1.7</td> <td>1.7</td> <td>1.8</td> <td>1.9</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.6</td> <td>7.7</td> <td>7.9</td> <td>8.0</td> <td>8.1</td> <td>8.3</td> <td>8.4</td> <td>8.5</td> <td>8.6</td> <td>8.7</td> <td>8.8</td> <td>9.0</td> <td>9.0</td> </tr> <tr> <td rowspan="3">50</td> <td>Hs1 (m)</td> <td>1.7</td> <td>2.1</td> <td>2.7</td> <td>3.2</td> <td>3.8</td> <td>4.5</td> <td>5.2</td> <td>5.6</td> <td>5.8</td> <td>6.1</td> <td>6.3</td> <td>6.4</td> <td>6.6</td> </tr> <tr> <td>Hs2 (m)</td> <td>1.0</td> <td>1.1</td> <td>1.2</td> <td>1.3</td> <td>1.4</td> <td>1.4</td> <td>1.5</td> <td>1.5</td> <td>1.6</td> <td>1.7</td> <td>1.8</td> <td>1.8</td> <td>1.9</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.7</td> <td>7.9</td> <td>8.0</td> <td>8.1</td> <td>8.3</td> <td>8.4</td> <td>8.5</td> <td>8.6</td> <td>8.7</td> <td>8.8</td> <td>8.9</td> <td>9.0</td> <td>9.1</td> </tr> <tr> <td rowspan="3">100</td> <td>Hs1 (m)</td> <td>1.7</td> <td>2.1</td> <td>2.7</td> <td>3.2</td> <td>3.8</td> <td>4.5</td> <td>5.2</td> <td>6.0</td> <td>6.1</td> <td>6.4</td> <td>6.6</td> <td>6.8</td> <td>7.0</td> </tr> <tr> <td>Hs2 (m)</td> <td>1.1</td> <td>1.2</td> <td>1.3</td> <td>1.3</td> <td>1.4</td> <td>1.5</td> <td>1.6</td> <td>1.6</td> <td>1.7</td> <td>1.8</td> <td>1.9</td> <td>1.9</td> <td>2.0</td> </tr> <tr> <td>Tp2 (s)</td> <td>7.9</td> <td>8.0</td> <td>8.1</td> <td>8.2</td> <td>8.4</td> <td>8.4</td> <td>8.6</td> <td>8.7</td> <td>8.8</td> <td>8.9</td> <td>9.0</td> <td>9.1</td> <td>9.2</td> </tr> <tr> <td rowspan="3">1000</td> <td>Hs1 (m)</td> <td>1.7</td> <td>2.1</td> <td>2.7</td> <td>3.2</td> <td>3.8</td> <td>4.5</td> <td>5.2</td> <td>6.0</td> <td>6.8</td> <td>7.4</td> <td>7.5</td> <td>7.8</td> <td>8.0</td> </tr> <tr> <td>Hs2 (m)</td> <td>1.3</td> <td>1.4</td> <td>1.5</td> <td>1.6</td> <td>1.6</td> <td>1.7</td> <td>1.8</td> <td>1.8</td> <td>1.9</td> <td>2.0</td> <td>2.0</td> <td>2.1</td> <td>2.2</td> </tr> <tr> <td>Tp2 (s)</td> <td>8.2</td> <td>8.4</td> <td>8.4</td> <td>8.6</td> <td>8.7</td> <td>8.8</td> <td>8.9</td> <td>8.9</td> <td>9.0</td> <td>9.1</td> <td>9.2</td> <td>9.3</td> <td>9.4</td> </tr> </table>															1	Hs1 (m)	0.0	0.0	0.0	2.3	2.8	3.1	3.3	3.6	3.8	4.0	4.2	4.4	4.5	Hs2 (m)	0.0	0.0	0.0	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	Tp2 (s)	0.0	0.0	0.0	7.1	7.3	7.5	7.6	7.8	8.0	8.1	8.3	8.4	8.6	10	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.4	4.6	4.8	5.1	5.3	5.5	5.7	5.8	Hs2 (m)	0.8	0.9	1.0	1.1	1.2	1.3	1.3	1.4	1.5	1.6	1.6	1.7	1.8	Tp2 (s)	7.4	7.5	7.7	7.8	7.9	8.1	8.2	8.3	8.5	8.6	8.7	8.8	8.9	20	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.0	5.2	5.4	5.6	5.8	6.0	6.2	Hs2 (m)	0.9	1.0	1.1	1.2	1.3	1.3	1.4	1.5	1.6	1.6	1.7	1.8	1.9	Tp2 (s)	7.5	7.7	7.8	7.9	8.1	8.2	8.3	8.5	8.6	8.7	8.8	8.9	9.0	30	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.1	5.4	5.6	5.8	6.0	6.3	6.4	Hs2 (m)	1.0	1.0	1.1	1.2	1.3	1.4	1.4	1.5	1.6	1.7	1.7	1.8	1.9	Tp2 (s)	7.6	7.7	7.9	8.0	8.1	8.3	8.4	8.5	8.6	8.7	8.8	9.0	9.0	50	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.6	5.8	6.1	6.3	6.4	6.6	Hs2 (m)	1.0	1.1	1.2	1.3	1.4	1.4	1.5	1.5	1.6	1.7	1.8	1.8	1.9	Tp2 (s)	7.7	7.9	8.0	8.1	8.3	8.4	8.5	8.6	8.7	8.8	8.9	9.0	9.1	100	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.1	6.4	6.6	6.8	7.0	Hs2 (m)	1.1	1.2	1.3	1.3	1.4	1.5	1.6	1.6	1.7	1.8	1.9	1.9	2.0	Tp2 (s)	7.9	8.0	8.1	8.2	8.4	8.4	8.6	8.7	8.8	8.9	9.0	9.1	9.2	1000	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	7.5	7.8	8.0	Hs2 (m)	1.3	1.4	1.5	1.6	1.6	1.7	1.8	1.8	1.9	2.0	2.0	2.1	2.2	Tp2 (s)	8.2	8.4	8.4	8.6	8.7	8.8	8.9	8.9	9.0	9.1	9.2
1	Hs1 (m)	0.0	0.0	0.0	2.3	2.8	3.1	3.3	3.6	3.8	4.0	4.2	4.4	4.5																																																																																																																																																																																																																																																																																																													
	Hs2 (m)	0.0	0.0	0.0	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6																																																																																																																																																																																																																																																																																																													
	Tp2 (s)	0.0	0.0	0.0	7.1	7.3	7.5	7.6	7.8	8.0	8.1	8.3	8.4	8.6																																																																																																																																																																																																																																																																																																													
10	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.4	4.6	4.8	5.1	5.3	5.5	5.7	5.8																																																																																																																																																																																																																																																																																																													
	Hs2 (m)	0.8	0.9	1.0	1.1	1.2	1.3	1.3	1.4	1.5	1.6	1.6	1.7	1.8																																																																																																																																																																																																																																																																																																													
	Tp2 (s)	7.4	7.5	7.7	7.8	7.9	8.1	8.2	8.3	8.5	8.6	8.7	8.8	8.9																																																																																																																																																																																																																																																																																																													
20	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.0	5.2	5.4	5.6	5.8	6.0	6.2																																																																																																																																																																																																																																																																																																													
	Hs2 (m)	0.9	1.0	1.1	1.2	1.3	1.3	1.4	1.5	1.6	1.6	1.7	1.8	1.9																																																																																																																																																																																																																																																																																																													
	Tp2 (s)	7.5	7.7	7.8	7.9	8.1	8.2	8.3	8.5	8.6	8.7	8.8	8.9	9.0																																																																																																																																																																																																																																																																																																													
30	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.1	5.4	5.6	5.8	6.0	6.3	6.4																																																																																																																																																																																																																																																																																																													
	Hs2 (m)	1.0	1.0	1.1	1.2	1.3	1.4	1.4	1.5	1.6	1.7	1.7	1.8	1.9																																																																																																																																																																																																																																																																																																													
	Tp2 (s)	7.6	7.7	7.9	8.0	8.1	8.3	8.4	8.5	8.6	8.7	8.8	9.0	9.0																																																																																																																																																																																																																																																																																																													
50	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	5.6	5.8	6.1	6.3	6.4	6.6																																																																																																																																																																																																																																																																																																													
	Hs2 (m)	1.0	1.1	1.2	1.3	1.4	1.4	1.5	1.5	1.6	1.7	1.8	1.8	1.9																																																																																																																																																																																																																																																																																																													
	Tp2 (s)	7.7	7.9	8.0	8.1	8.3	8.4	8.5	8.6	8.7	8.8	8.9	9.0	9.1																																																																																																																																																																																																																																																																																																													
100	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.1	6.4	6.6	6.8	7.0																																																																																																																																																																																																																																																																																																													
	Hs2 (m)	1.1	1.2	1.3	1.3	1.4	1.5	1.6	1.6	1.7	1.8	1.9	1.9	2.0																																																																																																																																																																																																																																																																																																													
	Tp2 (s)	7.9	8.0	8.1	8.2	8.4	8.4	8.6	8.7	8.8	8.9	9.0	9.1	9.2																																																																																																																																																																																																																																																																																																													
1000	Hs1 (m)	1.7	2.1	2.7	3.2	3.8	4.5	5.2	6.0	6.8	7.4	7.5	7.8	8.0																																																																																																																																																																																																																																																																																																													
	Hs2 (m)	1.3	1.4	1.5	1.6	1.6	1.7	1.8	1.8	1.9	2.0	2.0	2.1	2.2																																																																																																																																																																																																																																																																																																													
	Tp2 (s)	8.2	8.4	8.4	8.6	8.7	8.8	8.9	8.9	9.0	9.1	9.2	9.3	9.4																																																																																																																																																																																																																																																																																																													

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **37 of 129**

Title: **METOCEAN DATA**

Return Period (Years)	Tp1 (s)	10.5	11.0	11.5	12.0	12.5	13.0	13.5	14.0	14.5	15.0	15.5	16.0	16.5	17.0
1	Hs1 (m)	4.6	4.7	4.8	4.8	4.8	4.8	4.7	4.5	4.2	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	1.7	1.7	1.9	2.0	2.0	1.9	1.7	1.6	1.4	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	8.7	8.9	9.0	9.1	9.1	9.0	8.9	8.6	8.3	0.0	0.0	0.0	0.0	0.0
10	Hs1 (m)	6.0	6.2	6.3	6.4	6.5	6.6	6.6	6.6	6.6	6.6	6.5	6.3	6.0	5.6
	Hs2 (m)	1.8	1.9	2.0	2.1	2.1	2.2	2.3	2.3	2.3	2.2	2.1	2.0	1.9	1.7
	Tp2 (s)	9.0	9.1	9.2	9.3	9.4	9.5	9.5	9.6	9.5	9.5	9.4	9.2	9.0	8.7
20	Hs1 (m)	6.4	6.5	6.7	6.8	6.9	7.0	7.0	7.1	7.1	7.1	7.0	7.0	6.8	6.5
	Hs2 (m)	1.9	2.0	2.1	2.1	2.2	2.3	2.3	2.4	2.4	2.4	2.3	2.3	2.1	2.0
	Tp2 (s)	9.1	9.2	9.3	9.4	9.4	9.5	9.6	9.6	9.7	9.7	9.6	9.5	9.4	9.2
30	Hs1 (m)	6.5	6.7	6.9	7.0	7.1	7.2	7.3	7.4	7.4	7.4	7.4	7.3	7.2	7.0
	Hs2 (m)	1.9	2.0	2.1	2.1	2.2	2.3	2.3	2.4	2.4	2.5	2.4	2.3	2.3	2.1
	Tp2 (s)	9.1	9.2	9.3	9.4	9.5	9.5	9.6	9.7	9.7	9.8	9.7	9.6	9.5	9.4
50	Hs1 (m)	6.8	7.0	7.1	7.3	7.4	7.5	7.6	7.7	7.7	7.8	7.8	7.7	7.7	7.5
	Hs2 (m)	2.0	2.1	2.1	2.2	2.3	2.3	2.4	2.4	2.5	2.5	2.5	2.5	2.4	2.3
	Tp2 (s)	9.2	9.3	9.3	9.4	9.5	9.6	9.7	9.7	9.8	9.8	9.8	9.8	9.7	9.6
100	Hs1 (m)	7.1	7.3	7.5	7.6	7.8	7.9	8.0	8.1	8.2	8.2	8.2	8.2	8.2	8.1
	Hs2 (m)	2.0	2.1	2.2	2.2	2.3	2.4	2.4	2.5	2.5	2.6	2.6	2.6	2.6	2.5
	Tp2 (s)	9.2	9.3	9.4	9.5	9.6	9.6	9.7	9.7	9.8	9.9	9.9	9.9	9.9	9.8
1000	Hs1 (m)	8.2	8.4	8.6	8.7	9.0	9.1	9.2	9.3	9.4	9.6	9.6	9.7	9.8	9.8
	Hs2 (m)	2.2	2.3	2.4	2.4	2.5	2.5	2.6	2.6	2.7	2.8	2.8	2.9	2.9	2.9
	Tp2 (s)	9.5	9.5	9.6	9.7	9.8	9.8	9.9	9.9	10.0	10.0	10.1	10.1	10.2	10.2

Return Period (Years)	Tp1 (s)	17.5	18.0	18.5	19.0	19.5	20.0	20.5	21.0
1	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10	Hs1 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20	Hs1 (m)	6.1	5.3	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	1.8	1.5	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	8.9	8.5	0.0	0.0	0.0	0.0	0.0	0.0
30	Hs1 (m)	6.7	6.3	0.0	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	2.0	1.8	0.0	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	9.2	9.0	0.0	0.0	0.0	0.0	0.0	0.0
50	Hs1 (m)	7.3	7.0	6.5	0.0	0.0	0.0	0.0	0.0
	Hs2 (m)	2.2	2.1	1.9	0.0	0.0	0.0	0.0	0.0
	Tp2 (s)	9.5	9.3	9.0	0.0	0.0	0.0	0.0	0.0
100	Hs1 (m)	8.0	7.8	7.5	7.0	5.8	0.0	0.0	0.0
	Hs2 (m)	2.4	2.3	2.2	2.0	1.6	0.0	0.0	0.0
	Tp2 (s)	9.7	9.6	9.4	9.2	8.6	0.0	0.0	0.0
1000	Hs1 (m)	9.8	9.7	9.7	9.6	9.3	9.1	8.7	8.0
	Hs2 (m)	3.0	3.0	3.0	3.1	3.1	3.1	3.1	3.1
	Tp2 (s)	10.3	10.3	10.3	10.3	10.4	10.4	10.4	10.3

SOURCE: Modeled wave data – JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

5.3 JONSWAP Wave Spectrum for Santos Basins and Relation Tz / Tp

The JONSWAP Wave Spectrum, adjusted for Santos/Campos Basins wave conditions, is:

$$S(f) = \frac{5}{16} * H_s^2 * T_p * \left(\frac{f_p}{f}\right)^5 * (1 - 0.287 * \ln \gamma) * \exp\left[-1,25 * \left(\frac{f}{f_p}\right)^4\right] * \gamma^{\exp\left[-(f - f_p)^2 / (2 * \sigma^2 * f_p^2)\right]}$$

$$\sigma = \begin{cases} \sigma_a = 0.07, & \text{for } f \leq f_p \\ \sigma_b = 0.09, & \text{for } f > f_p \end{cases}$$

where: α - form parameter or Phillips constant

f_p - frequency (Hz)

- peak frequency (Hz)

γ - peakedness parameter or peak enhancement factor

σ - shape parameter or peak width

The gamma parameter for Santos/Campos Basin (included Buzios Field area) wave data is adjusted by the expression below:

$$\gamma = 6.4 * T_p^{(-0.491)}$$

Obs: The formulation above does not have the α (form parameter or Phillips constant) explicitly written in the formula. It is written in such way that the parameter α is included in the JONSWAP formulation above.

Relation between Tz and Tp

$$\text{Mean Zero-crossing period : } T_z = \frac{1}{f_p} \sqrt{\frac{5 + \gamma}{10.89 + \gamma}} \text{ or } T_z = T_p \sqrt{\frac{5 + \gamma}{10.89 + \gamma}}$$

where: $f_p = \frac{1}{T_p}$ and T_p - peak period.

EIW1 2022-02-07T18:22:29



PETROBRAS

5.4 Wave Spreading Formulation for Buzios Area

A random sea state can be described by the directional wave spectrum $S(f, \theta)$ that specifies the wave energy distribution over frequency and directions. As the directional characteristics are usually assumed to be independent of frequency, it permits that the general expression for the directional spectrum $S(f, \theta) = D(f, \theta) \cdot S(f)$ would be expressed as a product of wave directional spreading function $D(\theta)$ multiplied by the frequency spectrum:

$$S(f, \theta) = D(\theta) \cdot S(f)$$

where the specified directional spreading function satisfies the constraint:

$$\int_{-\pi}^{\pi} D(\theta) \cdot d\theta = 1$$

The most used directional spreading functions are:

$$D_1(\theta) = C_1(n) \cdot (\cos(\theta - \bar{\theta}))^n \quad \text{for } -\frac{1}{2}\pi \leq (\theta - \bar{\theta}) \leq +\frac{1}{2}\pi$$

$$D_2(\theta) = C_2(s) \cdot \left[\cos\left(\frac{\theta - \bar{\theta}}{2}\right) \right]^{2s} \quad \text{for } -\pi \leq (\theta - \bar{\theta}) \leq +\pi$$

$$D_1(\theta) = D_2(\theta) = 0 \quad \text{for all other } (\theta - \bar{\theta})$$

where the factors $C_1(\theta)$ and $C_2(\theta)$ are calculated using the gamma function Γ :

$$C_1(n) = \frac{\Gamma(n/2 + 1)}{\sqrt{\pi} \Gamma(n/2 + 1/2)}$$

$$C_2(s) = \frac{\Gamma(s + 1)}{2\sqrt{\pi} \Gamma(s + 1/2)}$$

The adjusted wave spreading parameter “ s ” calculated for Santos Basin (included Buzios Field) to be used in the formulation for $D_2(\theta)$ and $C_2(s)$ is provided below:

$$s = 20.3952 \cdot \tanh(0.128 \cdot tp - 1.88) + 0.3058 \cdot (hs^{1.582}) + 24$$

If the designer prefers to use the wave spreading parameter “ n ” for $D_1(\theta)$ and $C_1(n)$, a formulation from Reference [1] to convert the above calculated “ s ” to “ n ” is provided below:

$$aux = 0.5 \cdot (1 + s \cdot (s - 1) / ((s + 1) \cdot (s + 2)))$$

$$n = (2 \cdot aux - 1) / (1 - aux)$$

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 40 of 129

Title: METOCEAN DATA

5.5 Distribution of Total Significant Wave Heights and Wave Power

5.5.1 Distribution of Total Significant Wave Heights and Primary Spectral Peak Directions*

Hs(m)		DIRECTION(°)																Freq	%	Mean Dir
		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW			
0.0	0.5	0	0	0	1	1	1	0	2	3	0	0	0	0	0	0	0	8	0.01	145.6
0.5	1.0	19	51	266	342	146	135	93	104	138	143	49	6	5	4	3	8	1512	2	99.2
1.0	1.5	55	370	1622	2303	2314	1826	1303	784	577	505	105	26	8	11	9	24	11842	15.64	97
1.5	2.0	100	882	4137	4266	3161	3089	2799	2516	2291	1330	169	49	24	3	4	16	24836	32.8	103.3
2.0	2.5	68	840	3481	2557	1530	1404	1654	1965	2753	2367	348	85	27	15	8	19	19121	25.25	117.1
2.5	3.0	37	482	1722	1169	709	552	556	944	1519	1928	360	136	35	10	8	8	10175	13.44	131.9
3.0	3.5	22	170	721	428	288	212	211	365	651	1039	361	93	27	10	4	6	4608	6.09	149.2
3.5	4.0	3	41	222	134	101	108	90	115	229	555	199	53	10	4	3	0	1867	2.47	168.1
4.0	4.5	0	15	69	34	22	33	33	63	74	265	146	40	15	1	0	0	810	1.07	189.2
4.5	5.0	0	2	24	12	17	10	18	30	36	127	97	30	7	0	0	0	410	0.54	196.6
5.0	5.5	0	1	5	8	5	0	8	12	17	68	74	29	2	0	0	0	229	0.3	208.4
5.5	6.0	0	0	0	3	0	0	0	6	12	28	58	17	0	0	0	0	124	0.16	215
6.0	6.5	0	0	0	0	0	0	0	0	0	3	20	43	0	0	0	0	66	0.09	223.2
6.5	7.0	0	0	0	0	0	0	0	0	0	3	4	32	0	0	0	0	39	0.05	222.2
7.0	7.5	0	0	0	0	0	0	0	0	0	3	7	19	0	0	0	0	29	0.04	219
7.5	8.0	0	0	0	0	0	0	0	0	0	0	1	10	0	0	0	0	11	0.01	226.9
8.0	8.5	0	0	0	0	0	0	0	0	0	0	1	8	0	0	0	0	9	0.01	226.6
8.5	9.0	0	0	0	0	0	0	0	0	0	0	10	0	0	0	0	0	10	0.01	231.4
9.0	9.5	0	0	0	0	0	0	0	0	0	1	3	0	0	0	0	0	4	0.01	227.2
9.5	10.0	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	0	2	0	207.8
10.0	10.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	NaN
10.5	11.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	NaN
Freq		304	2854	12269	11257	8294	7370	6765	6906	8309	8391	2091	564	160	58	39	81	75712		
%		0.4	3.77	16.2	14.87	10.95	9.73	8.94	9.12	10.97	11.08	2.76	0.74	0.21	0.08	0.05	0.11			
Mean Hs		1.98	2.12	2.1	1.94	1.86	1.87	1.95	2.12	2.28	2.58	3.28	3.13	2.8	2.33	2.19	1.85			

(*) The Total Significant Wave Height (Hst) is obtained as $Hst=4*\sqrt{m_0}$, where m_0 is the integrated area of the total wave power spectrum (sea and swell partitions). The Primary Spectral Peak Direction is the approaching direction associated with the spectral peak period.

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals, providing information equivalent to 227136 hours (=75712 * 3 hours).

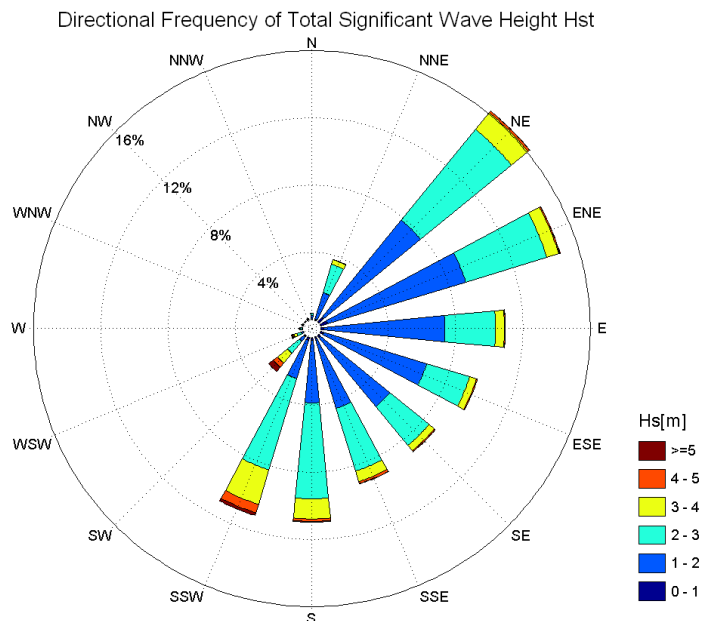


Figure 5.4.1.1 Directional percentage of Total Significant Wave Height

5.5.2 Distribution of Total Significant Wave Heights and Primary Spectral Peak Periods*

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **41 of 129**

Title: **METOCEAN DATA**

Hs(m)		Tp(s)																				Freq	%	Mean Tp
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21				
0.0	0.5	1	0	0	1	2	2	1	0	0	0	0	1	0	0	0	0	0	0	0	8	0.01	8.24	
0.5	1.0	107	113	205	256	273	159	112	74	68	50	41	38	12	4	0	0	0	0	0	1512	2	7.73	
1.0	1.5	15	938	1115	1792	3608	2505	692	373	283	260	108	103	31	11	3	0	2	3	11842	15.64	7.7		
1.5	2.0	1	349	3682	3524	4602	6028	2948	1626	993	534	251	174	69	26	18	8	1	2	24836	32.8	8.12		
2.0	2.5	0	13	1265	4995	2430	2755	2041	1870	1806	982	523	284	105	32	10	8	2	0	19121	25.25	8.74		
2.5	3.0	0	6	109	2114	2404	1040	858	798	879	1021	514	288	108	20	8	6	1	1	10175	13.44	9.27		
3.0	3.5	0	1	4	403	1240	856	277	292	294	424	431	280	77	18	8	1	1	1	4608	6.09	9.82		
3.5	4.0	0	0	0	43	268	550	189	91	140	141	139	209	75	16	5	1	0	0	1867	2.47	10.45		
4.0	4.5	0	0	0	3	31	207	161	48	47	63	68	89	73	17	3	0	0	0	810	1.07	11.16		
4.5	5.0	0	0	0	0	4	48	116	48	15	21	41	57	35	19	6	0	0	0	410	0.54	11.75		
5.0	5.5	0	0	0	0	0	16	45	60	19	15	16	22	20	7	8	1	0	0	229	0.3	11.88		
5.5	6.0	0	0	0	0	0	2	22	44	19	7	6	15	9	0	0	0	0	0	124	0.16	11.5		
6.0	6.5	0	0	0	0	0	0	10	18	22	0	3	11	2	0	0	0	0	0	66	0.09	11.55		
6.5	7.0	0	0	0	0	0	0	3	12	12	2	0	7	3	0	0	0	0	0	39	0.05	11.99		
7.0	7.5	0	0	0	0	0	0	4	4	14	1	0	1	5	0	0	0	0	0	29	0.04	11.99		
7.5	8.0	0	0	0	0	0	0	2	1	1	4	0	0	3	0	0	0	0	0	11	0.01	12.51		
8.0	8.5	0	0	0	0	0	0	0	5	0	1	0	1	2	0	0	0	0	0	9	0.01	12.47		
8.5	9.0	0	0	0	0	0	0	1	6	3	0	0	0	0	0	0	0	0	0	10	0.01	10.82		
9.0	9.5	0	0	0	0	0	0	0	1	1	1	0	0	0	1	0	0	0	0	4	0.01	12.88		
9.5	10.0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	0	0	0	2	0	16.95		
10.0	10.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
10.5	11.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
Freq		124	1420	6380	13131	14862	14168	7482	5371	4616	3527	2141	1580	629	173	69	25	7	7	75712				
%		0.16	1.88	8.43	17.34	19.63	18.71	9.88	7.09	6.1	4.66	2.83	2.09	0.83	0.23	0.09	0.03	0.01	0.01					
Mean Hs		0.86	1.35	1.75	2.07	2.03	2.04	2.2	2.31	2.38	2.49	2.69	2.9	3.14	3.12	3.05	2.43	2.07	1.96					

(*) The Total Significant Wave Height (Hst) is obtained as $Hst=4*\sqrt{m_0}$, where m_0 is the integrated area of the total wave power spectrum (sea and swell partitions). The Primary Spectral Peak is the period associated with maximum spectral energy.

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals, providing information equivalent to 227136 hours (=75712 * 3 hours).

EIW1 2022-02-07T18:22:29



PETROBRAS

5.5.3 Directional Distribution of Wave Power

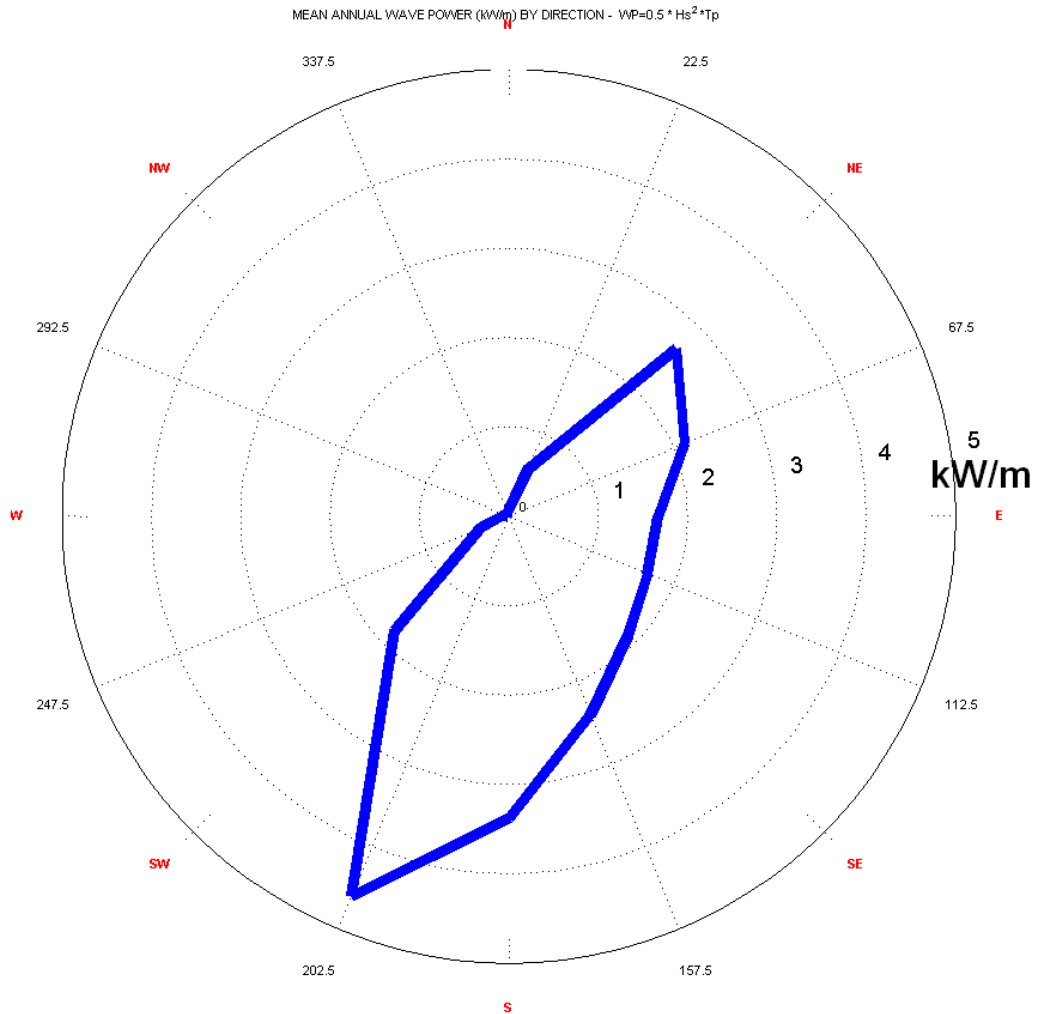


Figure 5.4.3.1 Directional distribution of mean annual wave power (Kw/m)

(*) The mean annual wave power was calculated using the equation $0.5 \cdot H_s^2 \cdot T_p$ using 3-hour wave data adding the contribution of all waves for a particular direction.

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data.

EIW1 2022-02-07T18:22:29



PETROBRAS

5.6 Distribution of Single and Double-Peak Sea States

5.6.1 Percentage of Single and Double-Peak Sea States

Direction of Primary Sea State	Number of Spectral Peaks	Occurrences of Unimodal / Bimodal	Percentage by Direction	Total by Direction	Percentage by Direction
N	<i>Unimodal</i>	24	0.03%	304	0.40%
	<i>Bimodal</i>	280	0.37%		
NNE	<i>Unimodal</i>	698	0.92%	2854	3.77%
	<i>Bimodal</i>	2156	2.85%		
NE	<i>Unimodal</i>	3947	5.21%	12269	16.20%
	<i>Bimodal</i>	8322	10.99%		
ENE	<i>Unimodal</i>	3889	5.14%	11257	14.87%
	<i>Bimodal</i>	7368	9.73%		
E	<i>Unimodal</i>	3257	4.30%	8294	10.95%
	<i>Bimodal</i>	5037	6.65%		
ESE	<i>Unimodal</i>	3202	4.23%	7370	9.73%
	<i>Bimodal</i>	4168	5.51%		
SE	<i>Unimodal</i>	2911	3.84%	6765	8.94%
	<i>Bimodal</i>	3854	5.09%		
SSE	<i>Unimodal</i>	2960	3.91%	6906	9.12%
	<i>Bimodal</i>	3946	5.21%		
S	<i>Unimodal</i>	3519	4.65%	8309	10.97%
	<i>Bimodal</i>	4790	6.33%		
SSW	<i>Unimodal</i>	4284	5.66%	8391	11.08%
	<i>Bimodal</i>	4107	5.42%		
SW	<i>Unimodal</i>	1354	1.79%	2091	2.76%
	<i>Bimodal</i>	737	0.97%		
WSW	<i>Unimodal</i>	164	0.22%	564	0.74%
	<i>Bimodal</i>	400	0.53%		
W	<i>Unimodal</i>	21	0.03%	160	0.21%
	<i>Bimodal</i>	139	0.18%		
WNW	<i>Unimodal</i>	6	0.01%	58	0.08%
	<i>Bimodal</i>	52	0.07%		
NW	<i>Unimodal</i>	1	0.00%	39	0.05%
	<i>Bimodal</i>	38	0.05%		
NNW	<i>Unimodal</i>	11	0.01%	81	0.11%
	<i>Bimodal</i>	70	0.09%		
Total	<i>Unimodal</i>	30248	39.95%	75712	100.00%
	<i>Bimodal</i>	45464	60.05%		

Percentage of Unimodal Sea States: 39.95%

Percentage of Bimodal Sea States: 60.05%

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals, providing information equivalent to 227136 hours (=75712 * 3 hours).

EIWI 2022-02-07T18:22:29



PETROBRAS

5.6.2 Distribution of Hs versus Tp for Primary Peak Waves approaching from N Direction

5.6.2.1 – Primary Hs1 versus Tp1 for Unimodal sea states (N)

Hs(m)		Tp(s)							Freq	%	MTp
		3	4	5	6	7	8	9			
0.00	0.50	0	0	0	0	0	0	0	0	0.00	0.00
0.50	1.00	2	0	0	0	3	1	0	6	25.00	6.35
1.00	1.50	0	5	1	1	2	1	0	10	41.67	5.74
1.50	2.00	0	0	5	0	0	0	0	5	20.83	5.35
2.00	2.50	0	0	1	1	0	0	0	2	8.33	5.82
2.50	3.00	0	0	0	1	0	0	0	1	4.17	6.08
3.0	3.50	0	0	0	0	0	0	0	0	0.00	0.00
Freq		2	5	7	3	5	2	0	24		
%		8.33	20.83	29.17	12.50	20.83	8.33	0.00			
MHs		0.76	1.20	1.70	2.11	0.94	1.05	0.00			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **45 of 129**

Title: **METOCEAN DATA**


5.6.2.2 Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (N)

Tp1 =>		3	4	5	6	7	8	9	Ocorr. HS1	% Hs1	
Hs1		4	5	6	7	8	9	10			
0.00	0.50	0	0	0	0	0	0	0	0	0.00	
0.50	1.00	4	24	0	0	1	1	0	30	10.71	
		0.51	0.84								
		12.00	8.40								
1.00	1.50	90	44	59	1	1	0	1	106	37.86	
		0	0.96	1.11	0.93	0.49					
		7.36	7.78	6.88	3.49	3.45					
1.50	2.00	0	0	68	55	21	4	2	85	30.36	
				68	1.39	1.34	1.06	1.39			0.44
				7.45	7.63	8.71	6.66	3.45			
2.00	2.50	0	0	68	1	34	4	2	41	14.64	
				1.62	1.69	1.11	0.85	0			
				7.43	8.52	4.77	4.63				
2.50	3.00	0	0	71	9	8	0	0	17	6.07	
				0	1.58	1.91					
				8.24	8.57	8.57					
3.00	3.50	0	0	0	0	1	0	0	1	0.36	
						1.46					
						8.24					
Ocorr. Tp1		4	68	115	65	19	5	4	280		
% Tp1		1.43	24.29	41.07	23.21	6.79	1.79	1.43			

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

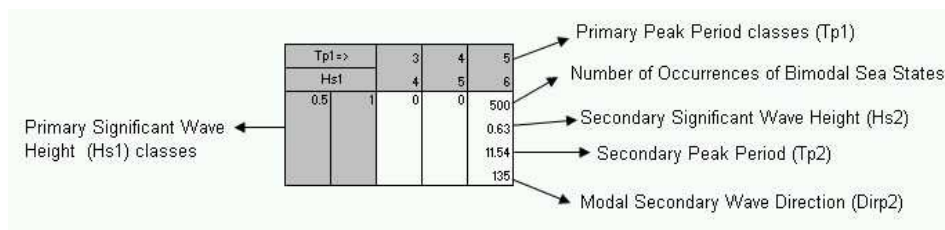



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 46 of 129

Title: METOCEAN DATA

5.6.3 Distribution of Hs versus Tp for Primary Peak Waves approaching from NNE Direction

5.6.3.1 – Primary Hs1 versus Tp1 for Unimodal sea states (NNE)

Hs(m)		Tp(s)								Freq	%	MTp
		3	4	5	6	7	8	9	10			
		4	5	6	7	8	9	10				
0.00	0.50	0	0	0	0	0	0	0	0	0	0.00	0.00
0.50	1.00	3	5	1	3	1	1	0	14	2.01	5.39	
1.00	1.50	2	70	42	21	4	7	0	146	20.92	5.31	
1.50	2.00	0	7	122	47	21	13	0	210	30.09	6.02	
2.00	2.50	0	0	36	120	16	2	2	176	25.21	6.41	
2.50	3.00	0	0	0	54	41	5	0	100	14.33	7.05	
3.00	3.50	0	0	0	9	18	11	0	38	5.44	7.46	
3.50	4.00	0	0	0	1	6	1	4	12	1.72	8.10	
4.00	4.50	0	0	0	0	0	2	0	2	0.29	8.59	
Freq		5	82	201	255	107	42	6	698			
%		0.72	11.75	28.80	36.53	15.33	6.02	0.86				
MHs		0.88	1.25	1.73	2.22	2.54	2.38	3.41				

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **47 of 129**

Title: **METOCEAN DATA**


5.6.3.2 Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (NNE)

Tp =>		3	4	5	6	7	8	9	Ocorr.	%
Hs1		4	5	6	7	8	9	10	Hs1	Hs1
0.00	0.50	1 0.44 10.57 173	0	0	0	0	0	0	1	0.05
0.50	1.00	16 0.37 5.18 68	60 0.70 8.33 90	8 0.47 3.48 315	7 0.42 3.43 338	3 0.42 9.73 225	7 0.61 3.88 225	0	101	4.68
1.00	1.50	0	103 0.92 8.39 90	429 1.04 7.85 90	47 1.07 7.88 90	27 0.81 4.22 225	9 0.44 3.45 203	0	615	28.53
1.50	2.00	0	1 1.41 8.68 161	310 1.22 9.03 113	391 1.14 7.86 90	31 0.52 3.58 338	30 0.95 4.65 248	1 1.04 4.57 301	764	35.44
2.00	2.50	0	0	2 1.65 10.62 135	377 1.19 8.16 90	58 1.09 8.31 90	19 1.01 4.35 270	3 0.79 5.15 225	459	21.29
2.50	3.00	0	0	0	34 1.72 11.77 180	122 1.11 8.24 90	9 1.70 5.79 293	3 2.14 7.28 225	168	7.79
3.00	3.50	0	0	0	0	15 2.18 12.67 180	13 1.61 9.65 158	1 1.84 5.48 283	29	1.35
3.50	4.00	0	0	0	0	4 3.33 14.72 180	11 1.25 9.03 90	2 0.58 7.51 113	17	0.79
4.00	4.50	0	0	0	0	0	2 0.99 9.06 113	0	2	0.09
Freq.		17	164	749	856	260	100	10	2156	
%		0.79	7.61	34.74	39.70	12.06	4.64	0.46		

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

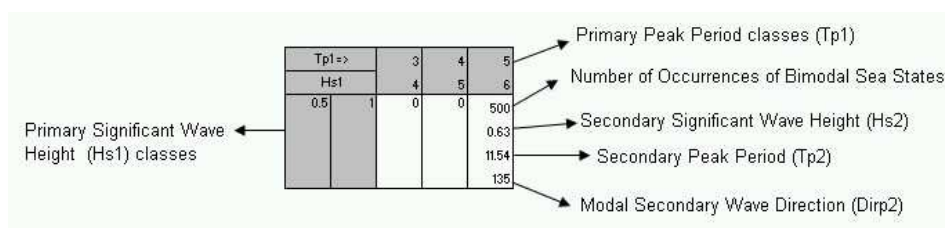



PETROBRAS

5.6.4 Distribution of Hs versus Tp for Primary Peak Waves approaching from NE Direction

5.6.4.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (NE)

Hs(m)		Tp(s)										Freq	%	MTp
		3	4	5	6	7	8	9	10	11	12			
0.00	0.50	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00
0.50	1.00	7	17	31	68	28	14	0	0	0	165	4.18	6.31	
1.00	1.50	2	148	180	267	231	53	2	0	2	885	22.42	6.33	
1.50	2.00	0	10	289	350	565	255	12	1	0	1482	37.55	7.02	
2.00	2.50	0	0	26	319	216	293	30	1	0	885	22.42	7.47	
2.50	3.00	0	0	0	92	122	68	52	13	0	347	8.79	7.87	
3.00	3.50	0	0	0	3	32	51	18	6	0	110	2.79	8.33	
3.50	4.00	0	0	0	0	6	24	13	0	0	43	1.09	8.64	
4.00	4.50	0	0	0	0	0	8	13	0	0	21	0.53	9.12	
4.50	5.00	0	0	0	0	0	1	6	1	0	8	0.20	9.63	
5.00	5.50	0	0	0	0	0	0	1	0	0	1	0.03	9.85	
Freq		9	175	526	1099	1200	767	147	22	2	3947			
%		0.23	4.43	13.33	27.84	30.40	19.43	3.72	0.56	0.05				
MHs		0.93	1.23	1.56	1.81	1.88	2.17	2.93	2.90	1.25				

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 49 of 129

Title: METOCEAN DATA


5.6.4.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (NE)

Tp =>		3	4	5	6	7	8	9	10	11	Ocor r.	% Hs1
Hs1		4	5	6	7	8	9	10	11	12		
0.00	0.50	3 0.39 4.71 113	0	0	0	0	0.40 3.44 225	0	0	0	5	0.06
0.50	1.00	17 0.47 10.87 180	69 0.66 9.22 113	20 0.88 9.40 113	37 0.61 3.73 338	34 0.45 4.00 225	18 0.39 3.45 203	0	0	0	195	2.34
1.00	1.50	0	136 0.95 8.92 113	779 0.90 8.28 113	336 0.87 7.91 113	281 0.67 3.89 0	167 0.83 4.44 203	18 0.59 4.03 203	0	1 0.36 3.27 352	1718	20.64
1.50	2.00	0	0	470 1.18 10.77 158	1642 0.99 8.44 113	486 0.72 10.32 203	406 0.86 4.58 225	46 1.15 5.96 203	2 1.88 6.17 203	0	3052	36.67
2.00	2.50	0	0	2 1.57 9.79 203	950 1.00 9.45 135	736 0.81 8.44 113	176 1.01 4.49 338	73 0.91 5.06 225	2 1.02 4.55 225	0	1939	23.30
2.50	3.00	0	0	0	55 1.62 11.69 158	667 0.95 10.74 158	141 0.76 8.94 113	37 1.15 4.82 338	4 1.02 4.99 338	0	904	10.86
3.00	3.50	0	0	0	0	140 1.30 10.16 135	217 0.81 9.39 135	8 0.53 10.56 180	1 1.57 5.51 351	0	366	4.40
3.50	4.00	0	0	0	0	1 1.58 8.39 127	77 0.75 10.07 158	22 0.35 8.77 135	0	0	100	1.20
4.00	4.50	0	0	0	0	0	12 2.05 12.11 135	18 1.21 9.41 90	1 0.18 15.91 209	0	31	0.37
4.50	5.00	0	0	0	0	0	0	10 0.91 11.30 135	1 0.18 15.82 181	0	11	0.13
5.00	5.50	0	0	0	0	0	0	1 1.96 9.89 126	0	0	1	0.01
Freq.		20	205	1271	3020	2347	1214	233	11	1	8322	
%		0.24	2.46	15.27	36.29	28.20	14.59	2.80	0.13	0.01		

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

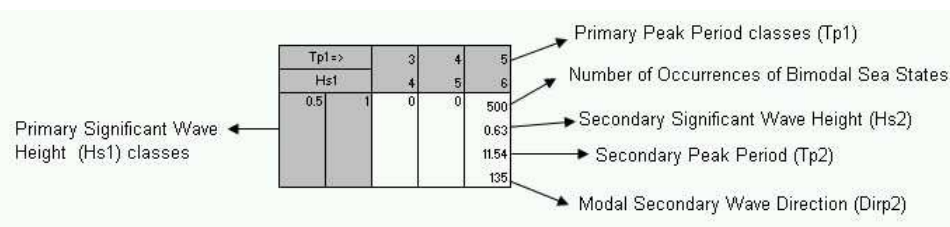



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 50 of 129

Title: METOCEAN DATA

5.6.5 Distribution of Hs versus Tp for Primary Peak Waves approaching from ENE Direction

5.6.5.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (ENE)

Hs(m)		Tp(s)													Freq	%	MTp
		3	4	5	6	7	8	9	10	11	12	13	14	15			
0.00	0.50	0	0	0	0	1	0	0	0	0	0	0	0	0	1	0.03	7.74
0.50	1.00	9	10	65	80	62	13	4	0	1	0	3	0	0	247	6.35	6.58
1.00	1.50	2	89	161	367	510	142	8	9	7	2	2	1	0	1300	33.43	6.96
1.50	2.00	0	12	196	275	595	422	32	2	2	2	1	1	0	1540	39.60	7.38
2.00	2.50	0	0	17	141	134	244	57	5	0	0	0	0	0	598	15.38	7.83
2.50	3.00	0	0	0	29	24	66	20	0	0	0	0	0	1	140	3.60	8.18
3.00	3.50	0	0	0	2	14	12	10	1	0	0	0	0	0	39	1.00	8.26
3.50	4.00	0	0	0	0	1	4	2	0	0	0	0	0	0	7	0.18	8.63
4.00	4.50	0	0	0	0	0	2	5	0	0	0	0	0	0	7	0.18	9.16
4.50	5.00	0	0	0	0	0	0	0	1	1	0	0	0	0	2	0.05	10.82
5.00	5.50	0	0	0	0	0	0	3	4	0	0	0	0	0	7	0.18	10.36
5.50	6.00	0	0	0	0	0	0	0	0	1	0	0	0	0	1	0.03	11.11
Freq		11	111	439	894	1341	905	141	22	12	4	6	2	1	3889		
%		0.28	2.85	11.29	22.99	34.48	23.27	3.63	0.57	0.31	0.10	0.15	0.05	0.03			
MHs		0.91	1.24	1.45	1.58	1.61	1.90	2.35	2.51	1.95	1.50	1.13	1.52	2.62			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 51 of 129


Title: METOCEAN DATA

5.6.5.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (ENE)

Tp =>		3	4	5	6	7	8	9	10	11	12	13	14	15	Ocor	%
Hs1		4	5	6	7	8	9	10	11	12	13	14	15	16	r.	Hs1
0.00	0.50	0	0	0	0	0	0	0.46 3.59 217	0	0	0	0	0	0	1	0.01
0.50	1.00	5 0.52 10.40 158	42 0.68 9.85 135	33 0.51 3.60 0	70 0.56 3.68 0	57 0.53 3.55 225	22 0.40 3.37 203	9 0.18 3.05 293	0	2 0.18 3.05 270	0	1 0.40 3.45 21	0	0	234	3.18
1.00	1.50	0	108 0.99 9.31 158	532 0.94 9.05 135	334 0.86 7.55 135	618 0.73 4.11 23	366 0.83 4.38 23	52 1.02 4.77 23	9 0.38 3.40 338	9 0.66 3.94 203	0	0	2 0.46 3.59 338	0	2030	27.55
1.50	2.00	0	1 0.62 6.38 173	563 1.16 10.55 180	1029 0.90 9.13 135	493 0.89 4.25 0	506 0.86 4.22 0	82 0.60 3.92 248	13 0.82 5.84 203	9 0.96 4.35 270	9 0.36 3.31 23	2 1.12 4.53 338	2 0.76 4.04 23	1 0.31 3.06 120	2710	36.78
2.00	2.50	0	13 1.34 10.03 180	846 1.06 10.36 158	377 0.72 10.59 158	183 1.18 4.84 0	62 1.05 4.82 0	6 1.24 8.93 203	2 0.76 7.32 270	0	0	0	1 1.05 4.49 300	2 1.78 5.55 270	1492	20.25
2.50	3.00	0	0	0	87 1.38 10.97 158	471 0.97 9.36 135	45 0.86 9.16 135	23 1.37 5.00 338	2 2.57 7.00 23	0	0	0	0	0	628	8.52
3.00	3.50	0	0	0	111 1.17 10.08 158	77 0.84 9.17 135	2 2.40 6.66 0	0	1 0.98 5.09 319	0	0	1 1.71 10.90 213	0	0	192	2.61
3.50	4.00	0	0	0	4 1.05 11.30 158	45 1.25 10.27 135	7 0.60 10.20 135	0	0	0	0	0	0	0	56	0.76
4.00	4.50	0	0	0	11 1.37 10.88 135	5 0.31 14.63 158	0	1 0.69 4.96 351	0	0	0	0	0	0	17	0.23
4.50	5.00	0	0	0	0	0	0	4 1.24 9.35 113	1 0.36 9.81 159	0	0	0	0	0	5	0.07
5.00	5.50	0	0	0	0	0	0	1 0.40 10.79 141	0	0	0	0	0	0	1	0.01
5.50	6.00	0	0	0	0	0	0	0	2 0.55 7.07 158	0	0	0	0	0	2	0.03
Freq.		5	151	1141	2366	2131	1255	240	32	26	9	4	5	3	7368	
%		0.07	2.05	15.49	32.11	28.92	17.03	3.26	0.43	0.35	0.12	0.05	0.07	0.04		

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

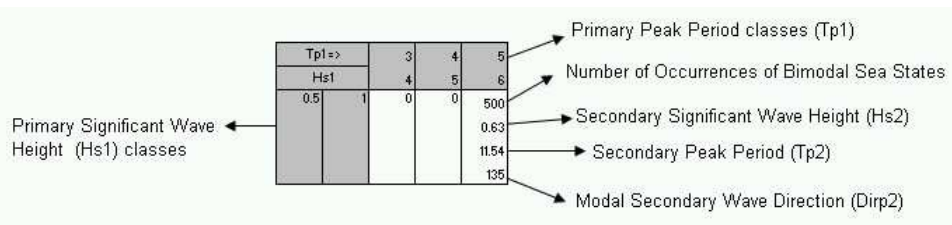

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 52 of 129

Title: METOCEAN DATA

5.6.6 Distribution of Hs versus Tp for Primary Peak Waves approaching from E Direction

5.6.6.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (E)

Hs(m)		Tp(s)													Freq	%	MTp
		3	4	5	6	7	8	9	10	11	12	13	14	15			
0.00	0.50	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0.03	8.77
0.50	1.00	0	7	25	20	18	11	13	2	3	1	2	1	0	103	3.16	7.36
1.00	1.50	2	46	74	230	520	262	54	25	12	14	2	3	4	1248	38.32	7.60
1.50	2.00	0	5	107	176	307	425	156	17	10	4	5	3	0	1215	37.30	7.92
2.00	2.50	0	0	9	121	64	100	39	25	9	3	11	3	0	384	11.79	8.14
2.50	3.00	0	0	1	42	54	50	22	11	6	0	5	1	0	192	5.89	8.29
3.00	3.50	0	0	0	7	14	25	16	6	0	0	0	0	0	68	2.09	8.51
3.50	4.00	0	0	0	0	5	13	3	2	0	0	0	0	0	23	0.71	8.48
4.00	4.50	0	0	0	0	0	5	2	0	0	0	0	0	0	7	0.21	8.75
4.50	5.00	0	0	0	0	0	4	2	6	0	0	0	0	0	12	0.37	9.86
5.00	5.50	0	0	0	0	0	0	2	2	0	0	0	0	0	4	0.12	10.17
Freq		2	58	216	596	982	896	309	96	40	22	25	11	4	3257		
%		0.06	1.78	6.63	18.30	30.15	27.51	9.49	2.95	1.23	0.68	0.77	0.34	0.12			
MHs		1.14	1.26	1.49	1.72	1.58	1.80	1.91	2.20	1.77	1.51	2.05	1.72	1.09			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 53 of 129


Title: METOCEAN DATA

5.6.6.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (E)

Tp =>		3	4	5	6	7	8	9	10	11	12	13	14	15	16	Ocorr.	%	
Hs1		4	5	6	7	8	9	10	11	12	13	14	15	16	17	Hs1	Hs1	
0.00	0.50	0	0	0	0	0	0	0.44 3.59 222	0	0	0	0	0	0	0	1	0.02	
0.50	1.00	1 0.91 8.80 165	16 0.76 10.14 180	18 0.42 4.13 158	39 0.72 4.19 23	59 0.63 3.84 23	29 0.62 3.79 23	7 0.80 4.52 45	7 0.46 3.47 45	4 0.62 4.09 248	5 0.61 3.85 45	3 0.52 3.36 270	1 0.54 3.36 154	1 0.33 3.21 43	0	190	3.77	
1.00	1.50	0	62 1.06 9.58 180	207 1.05 9.42 158	220 0.79 4.22 23	581 0.77 4.24 23	599 0.75 4.12 23	154 0.84 4.24 23	22 0.80 4.35 225	23 0.60 3.71 23	14 0.72 3.93 23	8 0.75 3.95 0	2 0.87 4.22 23	0	0	1892	37.56	
1.50	2.00	0	0	214 1.24 9.95 180	426 1.09 9.34 158	321 0.91 4.38 23	470 0.92 4.47 23	181 0.80 4.12 23	65 0.74 4.29 45	36 0.83 4.08 0	23 0.91 4.45 0	21 1.12 4.98 45	10 0.84 4.03 23	4 0.40 3.44 203	1 1.30 4.63 191	1772	35.18	
2.00	2.50	0	0	0	279 1.44 9.96 158	204 1.06 9.15 158	95 1.21 4.84 23	74 0.97 4.53 23	24 0.73 3.83 23	14 1.05 4.21 248	15 0.99 4.50 23	23 0.74 3.96 338	12 1.21 4.63 23	3 0.96 4.13 338	0	743	14.75	
2.50	3.00	0	0	0	27 1.63 13.19 180	206 1.30 10.31 158	59 0.83 9.54 158	11 1.53 5.18 0	1 0.74 8.07 161	5 0.28 3.05 248	0	1 1.25 4.95 339	6 0.79 4.06 45	1 1.10 5.02 42	0	317	6.29	
3.00	3.50	0	0	0	2 2.53 13.79 203	27 1.23 11.57 180	44 1.58 12.22 180	5 0.78 9.67 135	0	0	0	1 0.77 3.72 10	1 1.57 5.47 23	0	0	80	1.59	
3.50	4.00	0	0	0	0	1 1.35 13.89 142	24 1.30 9.64 180	6 0.89 9.33 135	0	0	0	0	0	0	0	0	31	0.62
4.00	4.50	0	0	0	0	0	3 0.70 9.55 180	4 0.77 9.43 135	0	0	0	0	0	0	0	0	7	0.14
4.50	5.00	0	0	0	0	0	2 0.83 8.96 158	1 0.44 11.85 144	0	0	0	0	0	0	0	0	3	0.06
5.00	5.50	0	0	0	0	0	0	1 0.36 10.74 175	0	0	0	0	0	0	0	0	1	0.02
Freq.		1	78	439	993	1399	1323	445	121	82	57	57	32	9	1	5037		
%		0.02	1.55	8.72	19.71	27.77	26.27	8.83	2.40	1.63	1.13	1.13	0.64	0.18	0.02			

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

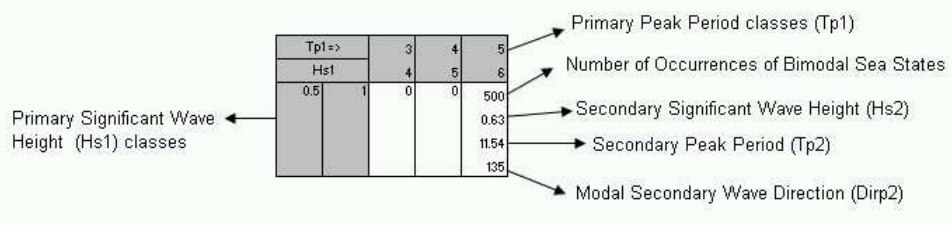



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 54 of 129

Title: METOCEAN DATA

5.6.7 Distribution of Hs versus Tp for Primary Peak Waves approaching from ESE Direction

5.6.7.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (ESE)

Hs(m)		Tp(s)														Freq	%	MTp
		3	4	5	6	7	8	9	10	11	12	13	14	15	16			
0.00	0.50	4	5	6	7	8	9	10	11	12	13	14	15	16	17			
0.00	0.50	0	0	0	0	0	1	0	0	0	0	0	0	0	0	1	0.03	8.11
0.50	1.00	0	0	12	8	24	25	11	2	1	3	3	9	0	0	98	3.06	8.70
1.00	1.50	0	21	39	140	298	276	73	21	15	9	4	8	7	1	912	28.48	8.00
1.50	2.00	0	3	74	129	268	451	201	62	20	21	8	10	5	0	1252	39.10	8.41
2.00	2.50	0	0	14	81	78	147	97	54	14	5	4	8	0	0	502	15.68	8.60
2.50	3.00	0	0	0	25	49	44	52	49	2	2	0	7	0	0	230	7.18	9.02
3.00	3.50	0	0	0	7	26	24	11	27	7	0	0	0	0	0	102	3.19	9.00
3.50	4.00	0	0	0	1	6	30	14	12	9	0	0	0	0	0	72	2.25	9.23
4.00	4.50	0	0	0	0	1	7	11	3	2	0	0	0	0	0	24	0.75	9.42
4.50	5.00	0	0	0	0	0	3	6	0	0	0	0	0	0	0	9	0.28	9.21
Freq		0	24	139	391	750	1008	476	230	70	40	19	42	12	1	3202		
%		0.00	0.75	4.34	12.21	23.42	31.48	14.87	7.18	2.19	1.25	0.59	1.31	0.37	0.03			
MHs		0.00	1.33	1.56	1.75	1.71	1.83	2.06	2.33	2.23	1.70	1.62	1.71	1.39	1.32			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **55 of 129**

Title: **METOCEAN DATA**


5.6.7.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (ESE)

Tp =>		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	Ocorr	%
Hs1		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	Hs1	Hs1
0.00	0.50	0	0.40 3.52 53	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0.02
0.50	1.00	0	4 0.61 7.46 158	3 0.46 3.56 68	15 0.65 3.91 45	48 0.68 4.38 45	21 0.77 4.28 45	14 0.59 3.84 45	7 0.63 4.36 45	7 0.50 3.41 23	7 0.39 3.44 0	3 0.40 3.46 248	0	0	0	0	129	3.10
1.00	1.50	0	7 1.08 9.85 203	68 1.11 9.21 180	115 0.79 4.30 45	449 0.72 4.29 45	649 0.84 4.48 45	232 0.81 4.36 45	88 0.73 4.19 45	51 0.74 3.96 23	44 0.78 4.13 23	18 0.79 4.07 338	10 0.81 4.26 45	5 0.83 4.32 45	1 0.47 3.59 11	1 0.92 5.40 168	1738	41.70
1.50	2.00	0	0	80 1.17 9.73 180	199 1.23 9.52 180	202 0.96 4.51 23	399 0.82 4.34 45	305 0.92 4.48 45	159 1.02 4.84 45	103 0.82 4.17 23	70 0.88 4.34 45	36 0.72 3.92 23	26 1.05 4.50 23	11 0.95 4.21 315	0	0	1590	38.15
2.00	2.50	0	0	2 1.94 12.98 203	127 1.36 10.91 180	98 1.24 10.02 180	71 0.97 7.90 180	76 1.22 5.11 68	47 1.17 5.10 68	39 0.78 3.97 23	24 0.69 3.89 23	23 0.75 3.84 23	15 1.41 5.12 23	6 1.54 5.31 0	0	1 1.06 4.49 335	529	12.69
2.50	3.00	0	0	0	8 2.07 11.47 180	60 1.59 11.47 180	23 1.29 9.82 180	13 1.76 5.90 45	5 2.17 7.29 225	2 0.95 4.16 203	7 1.65 5.53 23	1 1.39 5.01 40	10 1.53 5.34 23	0	0	0	129	3.10
3.00	3.50	0	0	0	0	12 2.00 11.39 180	24 1.46 11.18 180	2 1.68 12.18 158	0	0	0	2 0.40 3.29 315	8 1.08 4.08 338	0	0	0	48	1.15
3.50	4.00	0	0	0	0	0	3 1.68 12.59 203	0	0	0	0	0	1 0.70 3.31 342	0	0	0	4	0.10
Freq.		0	12	153	464	869	1190	642	306	202	152	83	70	22	1	2	4168	
%		0.00	0.29	3.67	11.13	20.85	28.55	15.40	7.34	4.85	3.65	1.99	1.68	0.53	0.02	0.05		

EIWI 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

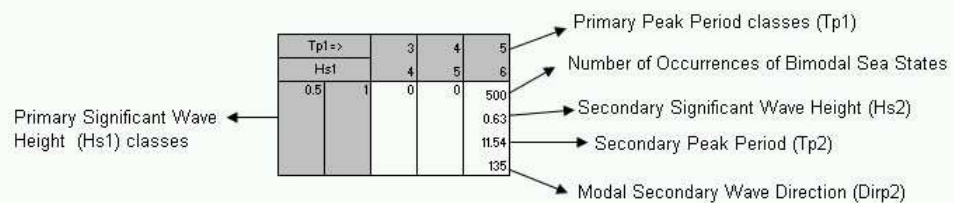



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **56 of 129**

Title: **METOCEAN DATA**

5.6.8 Distribution of Hs versus Tp for Primary Peak Waves approaching from SE Direction

5.6.8.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (SE)

Hs(m)	Tp(s)																				Freq	%	MTp	
	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20						
	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21						
0.0	0.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00
0.5	1.0	1	0	4	1	13	8	20	3	3	1	2	3	0	0	0	0	0	0	0	0	59	2.03	9.16
1.0	1.5	0	7	20	42	193	183	67	26	18	9	4	6	2	1	0	0	0	0	1	579	19.89	8.39	
1.5	2.0	0	2	58	70	210	392	217	130	51	31	13	7	7	0	1	0	0	0	0	1189	40.85	8.86	
2.0	2.5	0	0	15	91	96	155	179	65	53	14	9	12	5	0	0	0	0	0	0	694	23.84	9.04	
2.5	3.0	0	0	1	22	34	31	44	38	19	5	3	12	12	0	0	0	0	0	0	221	7.59	9.84	
3.0	3.5	0	0	0	8	15	17	17	20	6	9	0	0	3	0	0	0	0	0	0	95	3.26	9.57	
3.5	4.0	0	0	0	2	1	11	9	6	7	8	2	0	0	0	0	0	0	0	0	46	1.58	10.22	
4.0	4.5	0	0	0	0	0	1	4	0	4	1	2	0	0	0	0	0	0	0	0	12	0.41	10.91	
4.5	5.0	0	0	0	0	0	0	4	2	0	1	2	1	0	0	0	0	0	0	0	10	0.34	11.36	
5.0	5.5	0	0	0	0	0	0	0	2	0	2	2	0	0	0	0	0	0	0	0	6	0.21	12.09	
Freq	1	9	98	236	562	798	561	292	161	81	39	41	29	1	1	0	0	1	2911					
%	.03	.31	3.37	8.11	19.31	27.41	19.27	10.03	5.53	2.78	1.34	1.41	1.00	.03	.03	0	0	.03						
MHs	.82	1.33	1.70	2.00	1.77	1.84	2.01	2.12	2.18	2.38	2.42	2.12	2.38	1.44	1.98	0	0	1.34						

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 57 of 129

Title: METOCEAN DATA


5.6.8.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (SE)

Tp =>		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Ocorr	%
Hs1		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	Hs1	Hs1
0.0	0.5	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	1	0.03
									0.42												
									3.59												
									33												
0.5	1.0	0	2	0	8	48	18	8	7	4	11	2	1	0	0	0	0	0	0	109	2.83
			0.86		0.45	0.64	0.88	0.58	0.45	0.45	0.74	0.57	0.40								
			8.21		3.51	4.32	4.28	3.80	3.40	3.37	4.08	5.44	3.50								
			90		68	68	45	338	45	45	45	23	78								
1.0	1.5	0	2	40	51	307	473	204	117	54	45	26	28	6	2	1	0	1	0	1357	35.21
			1.01	1.20	0.83	0.76	0.80	0.89	0.80	1.01	0.92	0.87	0.80	1.00	0.38	0.64	0	0.94			
			8.66	8.83	5.14	4.57	4.74	4.74	4.49	4.77	4.67	4.53	4.11	4.66	3.40	3.82		5.02			
			68	203	90	45	68	68	68	45	45	45	0	45	23	7		101			
1.5	2.0	0	2	36	96	97	342	311	275	249	93	50	37	12	7	3	0	0	1	1611	41.80
			1.09	1.32	1.38	0.82	0.72	0.87	0.98	1.06	1.24	1.13	1.03	1.04	0.94	0.31			0.44		
			8.54	9.56	9.44	4.49	4.30	4.53	4.70	4.80	5.30	4.84	4.91	4.64	5.16	3.11			3.59		
			45	203	203	68	68	68	45	68	68	45	45	0	45	0			344		
2.0	2.5	0	0	1	47	42	47	75	45	115	83	37	32	13	0	0	0	0	0	537	13.93
			1.75	1.59	1.40	1.11	1.12	1.04	1.01	1.16	1.16	1.20	1.71								
			11.98	10.17	10.29	4.77	4.84	4.47	4.59	4.86	4.86	4.72	5.85								
			195	203	203	68	68	68	45	45	45	23	45								
2.5	3.0	0	0	0	4	37	15	5	7	23	31	17	19	1	3	0	0	0	0	162	4.20
			1.74	1.47	0.97	2.00	0.76	1.04	0.74	0.71	2.24	2.93	1.32								
			11.01	10.42	10.14	6.49	5.07	4.61	4.07	3.90	6.90	7.39	5.29								
			203	203	203	45	293	90	68	45	45	47	248								
3.0	3.5	0	0	0	1	12	10	3	0	1	1	1	10	8	2	2	0	0	0	51	1.32
			3.01	1.77	1.54	0.90		0.40	1.62	1.28	0.88	2.67	1.27	1.42							
			14.88	11.98	11.36	15.38		3.62	5.97	4.93	4.08	6.72	5.09	5.65							
			200	203	203	180		73	93	4	315	23	248	248							
3.5	4.0	0	0	0	0	0	6	2	0	3	0	0	5	3	1	0	0	0	0	20	0.52
			2.47	1.30			2.47	1.30		0.37			2.59	2.56	2.48						
			13.51	10.84			13.51	10.84		3.61			7.07	6.63	6.32						
			203	203			203	203		68			203	45	48						
4.0	4.5	0	0	0	0	0	0	2	0	0	2	0	0	0	0	0	0	0	0	4	0.10
			0.28					0.28			0.34										
			9.78					9.78			3.34										
			203					203			68										
4.5	5.0	0	0	0	0	0	0	1	0	0	1	0	0	0	0	0	0	0	0	2	0.05
			1.42					1.42			0.18										
			11.57					11.57			3.05										
			184					184			80										
Freq.		0	6	77	207	543	911	611	452	449	267	133	132	43	15	6	0	1	1	3854	
%		0	0.16	2.00	5.37	14.09	23.64	15.85	11.73	11.65	6.93	3.45	3.43	1.12	0.39	0.16	0	0.03	0.03		

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

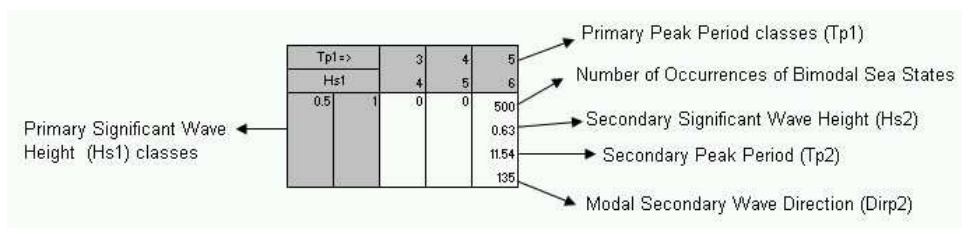



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **58 of 129**

Title: **METOCEAN DATA**

5.6.9 Distribution of Hs versus Tp for Primary Peak Waves approaching from SSE Direction

5.6.9.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (SSE)

Hs(m)		Tp(s)															Freq	%	MTP
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17			
0.00	0.50	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0.03	3.33
0.50	1.00	4	2	12	1	7	9	10	3	6	3	0	10	0	0	0	67	2.26	8.91
1.00	1.50	0	16	16	32	112	74	35	19	17	8	9	10	3	0	0	351	11.86	8.53
1.50	2.00	0	3	53	52	164	281	204	112	64	30	12	4	2	2	1	984	33.24	8.95
2.00	2.50	0	0	33	105	73	151	151	96	94	57	44	13	5	1	0	823	27.80	9.51
2.50	3.00	0	0	4	46	38	55	104	63	38	35	12	10	0	0	1	406	13.72	9.71
3.00	3.50	0	0	0	4	37	26	27	26	20	18	9	5	0	0	0	172	5.81	9.96
3.50	4.00	0	0	0	1	7	12	6	10	3	12	3	9	1	1	0	65	2.20	10.93
4.00	4.50	0	0	0	0	0	4	4	7	6	12	10	2	4	2	0	51	1.72	12.32
4.50	5.00	0	0	0	0	0	2	2	0	1	6	8	0	0	3	0	22	0.74	12.83
5.00	5.50	0	0	0	0	0	0	0	2	1	2	5	0	0	2	0	12	0.41	13.23
5.50	6.00	0	0	0	0	0	0	0	1	4	0	1	0	0	0	0	6	0.20	11.48
Freq		5	21	118	241	438	614	543	339	254	183	113	63	15	11	2	2960		
%		0.17	0.71	3.99	8.14	14.80	20.74	18.34	11.45	8.58	6.18	3.82	2.13	0.51	0.37	0.07			
MHs		0.60	1.24	1.77	2.15	1.95	2.01	2.16	2.30	2.31	2.63	2.84	2.26	2.70	3.93	2.35			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 59 of 129

Title: METOCEAN DATA


5.6.9.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (SSE)

Tp =>		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Ocorr	%
Hs1		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	Hs1	Hs1
0.0	0.5	0	0	0	0	1	1	2	2	0	0	0	0	0	0	0	0	0	0	6	0.15
						0.40	0.42	0.21	0.42												
						3.44	3.58	3.05	3.54												
						44	69	45	45												
0.5	1.0	0	6	0	8	14	19	8	14	11	5	5	2	0	0	0	0	0	0	92	2.33
			0.69		0.33	0.79	0.76	0.58	0.54	0.50	0.62	0.53	0.33								
			7.41		3.14	5.24	4.67	6.05	3.50	3.44	3.73	4.31	3.13								
			68		68	68	68	225	45	45	0	90	315								
1.0	1.5	0	13	34	23	156	331	225	121	63	48	13	14	9	5	3	1	0	2	1061	26.89
			0.88	1.01	0.98	0.76	0.88	0.84	0.96	0.83	0.98	0.88	0.90	0.55	1.17	0.73	1.15	0	0.40		
			8.60	7.72	5.59	4.55	4.91	4.74	4.86	4.74	4.89	5.02	4.35	3.92	5.17	3.76	4.58		3.49		
			90	68	90	90	90	90	45	68	45	23	45	0	23	45	71		90		
1.5	2.0	0	3	24	62	80	244	299	393	291	134	51	33	17	4	0	1	1	0	1637	41.49
			1.31	1.17	1.40	0.94	0.90	0.78	0.97	1.09	1.10	1.07	1.50	1.26	0.87	0	0.38	0.42			
			9.50	8.16	8.89	4.62	4.80	4.63	4.66	4.90	4.81	4.68	5.68	4.99	4.12		3.39	3.56			
			90	68	203	90	113	90	68	68	45	23	45	45	45		105	345			
2.0	2.5	0	1	1	47	22	50	54	94	156	199	90	54	18	1	1	2	0	0	790	20.02
			1.43	0.95	1.68	1.31	1.13	0.94	0.97	1.01	1.38	1.09	1.30	1.64	0.38	0.57	0.49				
			5.57	6.91	9.69	10.16	5.01	4.53	4.71	4.58	5.26	4.62	4.85	5.62	3.43	3.75	3.32				
			69	59	203	203	113	113	113	68	68	90	23	23	57	281	338				
2.5	3.0	0	0	0	5	38	12	5	13	10	71	66	31	21	3	0	0	0	0	275	6.97
					1.84	1.50	1.13	0.45	0.56	0.65	1.42	1.53	2.09	1.17	1.33						
					12.15	10.48	9.45	3.56	3.80	4.51	5.54	5.63	6.30	4.83	4.65						
					203	203	203	113	113	90	113	90	45	45	225						
3.0	3.5	0	0	0	6	11	0	0	1	7	7	13	5	1	1	0	0	0	0	52	1.32
					1.47	1.08			0.92	0.87	1.75	1.56	1.68	1.21	1.16						
					10.21	9.75			4.87	4.49	5.47	5.23	5.30	4.98	5.06						
					203	203			93	90	113	68	0	247	247						
3.5	4.0	0	0	0	1	5	4	1	1	2	0	0	5	0	0	0	0	0	0	19	0.48
					2.38	1.89	0.68	1.39	0.69	0.73			0.83								
					10.58	11.07	8.82	5.59	4.68	4.64			4.98								
					217	203	45	216	108	113			68								
4.0	4.5	0	0	0	1	2	0	0	2	0	0	0	8	0	0	0	0	0	0	13	0.33
					0.94	1.09			0.63				1.73								
					9.79	9.81			4.41				5.31								
					108	113			113				90								
4.5	5.0	0	0	0	1	1.25	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0.03
					11.01																
					196																
Freq.		0	23	59	145	318	674	600	638	533	468	232	147	75	22	5	4	1	2	3946	
%		0	0.58	1.50	3.67	8.06	17.08	15.21	16.17	13.51	11.86	5.88	3.73	1.90	0.56	0.13	0.10	0.03	0.05		

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

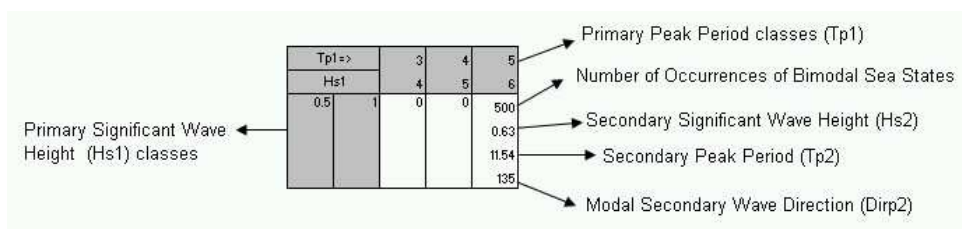



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **60 of 129**

Title: **METOCEAN DATA**

5.6.10 Distribution of Hs versus Tp for Primary Peak Waves approaching from S Direction

5.6.10.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (S)

Hs(m)		Tp(s)																	Freq	%	MTp	
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19				20
		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				21
0.0	0.5	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0.03	7.31
0.5	1.0	3	4	8	2	6	10	10	4	10	2	12	1	7	0	0	0	0	0	79	2.24	9.87
1.0	1.5	0	15	6	23	53	44	38	33	24	15	5	8	0	0	0	0	0	0	264	7.50	9.02
1.5	2.0	0	2	40	44	119	266	146	139	71	40	15	11	2	3	1	1	0	0	900	25.58	9.24
2.0	2.5	0	0	25	115	70	183	171	167	152	86	58	14	6	1	1	0	0	0	1049	29.81	9.81
2.5	3.0	0	0	0	87	78	64	100	105	60	56	28	26	6	6	1	1	0	0	618	17.56	9.94
3.0	3.5	0	0	0	11	47	42	31	40	43	38	44	36	11	3	0	0	1	1	348	9.89	11.08
3.5	4.0	0	0	0	2	10	23	8	13	26	10	15	24	11	1	2	1	0	0	146	4.15	11.73
4.0	4.5	0	0	0	0	6	13	1	4	7	8	3	8	2	0	0	0	0	0	52	1.48	10.98
4.5	5.0	0	0	0	0	0	1	2	2	2	2	6	6	5	1	0	0	0	0	27	0.77	13.24
5.0	5.5	0	0	0	0	0	2	4	0	1	2	3	2	0	1	0	0	0	0	15	0.43	11.85
5.5	6.0	0	0	0	0	0	1	2	2	2	1	0	3	0	0	0	0	0	0	11	0.31	11.58
6.0	6.5	0	0	0	0	0	0	1	0	1	0	0	1	0	0	0	0	0	0	3	0.09	11.80
6.5	7.0	0	0	0	0	0	0	0	0	1	0	0	1	1	0	0	0	0	0	3	0.09	13.64
7.0	7.5	0	0	0	0	0	0	0	0	1	0	0	0	2	0	0	0	0	0	3	0.09	13.86
Freq		3	21	79	284	390	649	514	509	401	260	189	141	53	16	5	3	1	1	3519		
%		0.09	0.60	2.24	8.07	11.08	18.44	14.61	14.46	11.40	7.39	5.37	4.01	1.51	0.45	0.14	0.09	0.03	0.03			
MHs		0.87	1.19	1.80	2.28	2.23	2.19	2.24	2.32	2.45	2.55	2.68	3.15	3.20	2.96	2.93	2.74	3.32	3.06			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 61 of 129

Title: METOCEAN DATA


5.6.10.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (S)

Tp =>		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	Ocorr	%
Hs1		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	Hs1	Hs1
0.0	0.5	0	0	0	1 0.13 3.05 65	0	0	0	0	0	0	1 0.42 3.58 48	2 0.42 3.52 45	0	0	0	0	0	0	4	0.08
0.5	1.0	2 0.62 8.36 90	9 0.76 8.32 90	0	5 0.42 4.21 113	15 0.70 4.60 68	12 0.41 4.08 90	16 0.60 3.74 68	4 0.60 3.88 23	12 0.36 5.56 293	13 0.60 3.58 0	4 0.65 3.96 0	15 0.43 3.54 45	5 0.38 3.42 356	1 0.79 3.86 356	0	0	0	0	113	2.36
1.0	1.5	1 1.06 6.96 63	25 1.04 7.78 68	59 1.02 9.03 113	15 0.74 5.32 113	57 0.77 4.49 113	164 0.78 4.74 113	214 1.01 5.12 90	105 1.03 4.95 90	59 0.93 4.63 45	46 0.96 4.75 45	18 0.96 4.84 113	11 0.64 4.05 90	7 0.49 3.62 90	4 1.21 4.80 68	6 0.92 4.86 90	2 0.77 3.77 45	2 0.52 3.56 68	0	795	16.60
1.5	2.0	0	2 1.40 7.55 45	53 1.07 7.74 68	57 1.09 8.04 68	56 0.84 4.63 113	219 0.82 4.59 113	301 0.81 4.57 113	446 1.01 4.82 90	440 1.18 5.17 90	195 1.23 5.06 68	87 1.18 4.88 68	44 0.95 4.39 68	20 0.89 4.25 90	12 1.26 5.24 23	5 1.12 4.55 68	6 1.07 4.52 113	1 0.51 3.59 28	1 0.72 3.89 37	1945	40.61
2.0	2.5	0	0	3 1.21 7.20 45	46 1.02 7.74 68	25 1.11 8.23 45	30 1.27 5.19 135	76 1.01 4.81 113	152 0.79 4.41 113	296 1.15 4.97 90	371 1.25 4.99 68	162 1.24 5.01 68	89 1.38 5.30 45	33 1.15 4.73 68	12 1.32 5.59 45	5 0.70 4.39 248	3 0.38 3.38 23	1 1.37 4.84 315	1 1.20 4.56 320	1305	27.24
2.5	3.0	0	0	0	13 1.16 8.07 68	31 0.84 8.17 68	7 0.71 7.33 135	5 0.62 4.66 113	21 1.03 5.05 135	46 0.69 4.05 113	108 0.81 4.66 113	122 0.96 4.61 113	76 1.92 5.95 45	17 1.58 5.30 68	4 1.36 5.45 90	0	0	0	0	450	9.39
3.0	3.5	0	0	0	4 0.89 7.55 45	9 1.71 9.78 225	2 1.21 5.71 113	4 0.51 3.92 135	2 0.86 4.51 113	19 0.52 4.52 113	46 0.80 4.46 113	39 1.62 5.95 113	10 1.23 4.76 68	0	1 0.70 3.40 113	0	0	0	136	2.84	
3.5	4.0	0	0	0	6 0.71 8.87 113	1 0.22 10.44 128	0	0	2 0.38 5.20 113	2 2.93 7.81 270	12 1.35 5.28 113	7 1.88 5.43 68	1 0.68 3.78 85	1 0.61 3.36 91	0	0	0	0	32	0.67	
4.0	4.5	0	0	0	3 1.02 8.82 68	3 0.82 8.89 113	0	0	0	0	0	0	0	2 2.06 6.42 113	0	0	0	0	8	0.17	
4.5	5.0	0	0	0	0	0	0	1 1.29 10.54 146	0	0	0	0	0	0	0	0	0	0	1	0.02	
5.0	5.5	0	0	0	0	0	0	0	1 1.39 11.34 135	0	0	0	0	0	0	0	0	0	1	0.02	
Freq.		3	36	115	137	188	450	618	733	856	754	442	288	101	34	18	11	4	2	4790	
%		0.06	0.75	2.40	2.86	3.92	9.39	12.90	15.30	17.87	15.74	9.23	6.01	2.11	0.71	0.38	0.23	0.08	0.04		

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

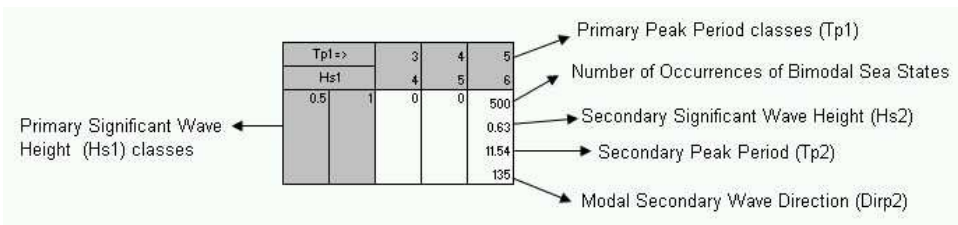



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **62 of 129**

Title: **METOCEAN DATA**

5.6.11 Distribution of Hs versus Tp for Primary Peak Waves approaching from SSW Direction

5.6.11.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (SSW)

Hs(m)		Tp(s)																Freq	%	MTp			
		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18						
0.00	0.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00	
0.50	1.00	1	6	8	7	3	6	4	20	11	8	8	2	0	1	0	0	0	0	0	85	1.98	9.63
1.00	1.50	1	19	13	19	29	35	27	20	27	26	19	6	0	0	0	0	0	0	0	241	5.63	9.32
1.50	2.00	0	0	28	36	82	151	94	72	70	28	18	14	0	1	0	0	0	0	0	594	13.87	9.39
2.00	2.50	0	0	3	78	66	185	251	213	129	71	31	21	2	4	1	1	1056	24.65	9.92			
2.50	3.00	0	0	0	48	68	75	150	217	155	122	68	11	11	3	2	2	932	21.76	10.61			
3.00	3.50	0	0	0	11	53	40	44	86	100	125	71	43	13	2	2	0	590	13.77	11.36			
3.50	4.00	0	0	0	1	24	54	15	21	63	74	53	43	2	5	0	0	355	8.29	11.59			
4.00	4.50	0	0	0	0	0	30	17	13	15	23	40	36	17	9	3	0	203	4.74	12.51			
4.50	5.00	0	0	0	0	1	6	15	8	6	5	11	29	14	9	6	0	110	2.57	13.19			
5.00	5.50	0	0	0	0	0	2	3	2	3	8	3	15	11	4	8	1	60	1.40	14.26			
5.50	6.00	0	0	0	0	0	0	5	4	1	2	1	8	4	0	0	0	25	0.58	12.63			
6.00	6.50	0	0	0	0	0	0	0	1	3	0	3	9	2	0	0	0	18	0.42	13.67			
6.50	7.00	0	0	0	0	0	0	0	1	0	0	0	2	0	0	0	0	3	0.07	13.05			
7.00	7.50	0	0	0	0	0	0	0	0	3	0	0	1	3	0	0	0	7	0.16	13.56			
7.50	8.00	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	1	0.02	15.52			
8.00	8.50	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0.00	0.00			
8.50	9.00	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00			
9.00	9.50	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	1	0.02	16.90			
9.50	10.00	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	0	2	0.05	16.95			
Freq		2	25	52	200	326	584	625	678	586	492	326	241	80	41	22	4	4284					
%		0.05	0.58	1.21	4.67	7.61	13.63	14.59	15.83	13.68	11.48	7.61	5.63	1.87	0.96	0.51	0.09						
MHs		0.95	1.16	1.52	2.22	2.40	2.46	2.51	2.58	2.74	2.92	3.10	3.79	4.32	4.29	4.45	3.19						

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 63 of 129

Title: METOCEAN DATA

5.6.11.2 Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (SSW)

Tp =>		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	Ocorr	%
Hs1		4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	Hs1	Hs1	
0.00	0.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00
0.50	1.00	7	25	0	1	6	10	8	15	17	29	3	2		3				126	3.07
		0.63	0.57	0.00	0.13	0.51	0.42	0.49	0.45	0.60	0.47	0.59	0.13		0.67					
		7.36	9.28	0.00	3.05	4.90	3.43	3.42	3.29	3.82	3.52	3.79	3.05	0	3.75					
		45	90	0	67	45	23	45	270	23	68	23	338		68					
1.00	1.50	1	19	64	18	20	63	72	62	42	54	26	23	7	2				473	11.52
		1.02	1.04	0.97	0.80	0.77	0.95	0.85	0.74	0.85	0.61	0.57	0.53	0.65	1.00					
		7.48	8.08	7.83	6.66	4.28	5.01	4.58	4.33	4.96	3.85	3.73	3.54	4.08	6.14					
		60	45	45	135	158	135	90	45	68	90	23	0	23	45					
1.50	2.00	4	58	120	54	89	205	225	236	111	41	37	21	2					1203	29.29
		1.31	1.21	1.14	1.07	0.84	0.99	0.97	1.19	1.17	1.20	1.07	0.73	1.37						
		7.53	8.27	8.75	6.61	4.43	4.91	4.82	5.13	5.19	5.27	4.87	4.01	4.92						
		68	45	90	135	135	135	113	90	135	90	68	90	45						
2.00	2.50	9	70	70	30	81	221	318	265	91	54	20	4	2	1				1236	30.09
		1.48	1.33	1.02	0.96	1.04	1.00	0.96	1.14	1.18	1.15	1.38	1.29	0.76	0.61					
		7.44	8.27	8.73	4.96	4.91	4.80	4.93	5.14	5.07	4.96	4.91	6.09	5.03	3.92					
		45	45	90	135	135	135	113	90	90	45	68	68	68	333					
2.50	3.00	10	65	37	9	27	88	137	145	80	13	2	2	2					617	15.02
		1.01	1.10	0.88	1.04	1.14	0.65	0.73	1.37	1.34	1.84	2.78	0.69	1.79						
		7.82	8.33	8.45	5.06	4.89	4.36	4.33	5.17	5.15	5.67	6.85	4.21	7.13						
		68	68	68	135	158	113	135	90	45	113	45	315	113						
3.00	3.50	10	32	6	1	6	31	76	78	37	5	3							285	6.94
		1.52	0.90	0.50	3.10	0.80	0.92	0.82	1.11	1.66	1.17	0.83								
		8.85	8.50	12.47	7.42	4.31	4.65	4.52	5.04	5.56	4.68	4.59								
		45	68	90	265	135	135	135	113	135	113	293								
3.50	4.00	7	15	2															114	2.78
		1.26	0.70	0.36																
		8.85	9.32	8.21																
		68	90	90																
4.00	4.50	1	7	1	1	2	5	4	18	1									40	0.97
		0.79	1.22	1.03	1.76	0.13	3.22	0.68	1.13	0.25										
		8.23	9.52	10.75	6.02	3.05	8.01	4.51	4.85	3.05										
		64	68	79	148	135	270	135	135	127										
4.50	5.00	1																	7	0.17
		3.08																		
		7.40																		
		233																		
5.00	5.50	1	2																3	0.07
		0.77	0.72																	
		9.71	10.74																	
		95	135																	
5.50	6.00	1	1																2	0.05
		1.43	1.13																	
		9.81	11.82																	
		161	173																	
6.00	6.50																		0	0.00
6.50	7.00																		1	0.02
Freq.		8	48	131	219	225	269	404	558	709	636	395	310	158	26	8	3	4107		
%		0.19	1.17	3.19	5.33	5.48	6.55	9.84	13.59	17.26	15.49	9.62	7.55	3.85	0.63	0.19	0.07			

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **64 of 129**

Title: **METOCEAN DATA**

5.6.12 Distribution of Hs versus Tp for Primary Peak Waves approaching from SW Direction

5.6.12.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (SW)

Hs(m)		Tp(s)														Freq	%	MTp	
		3	4	5	6	7	8	9	10	11	12	13	14	15	16				
0.00	0.50	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00	0.00
0.50	1.00	0	1	7	1	3	3	2	5	8	1	1	0	0	2	34	2.51	9.38	
1.00	1.50	1	9	8	10	19	5	3	2	1	3	3	0	0	2	66	4.87	7.76	
1.50	2.00	0	1	6	22	28	18	6	4	2	4	1	2	0	0	94	6.94	8.08	
2.00	2.50	0	0	2	34	21	33	35	14	3	7	12	0	0	0	161	11.89	8.97	
2.50	3.00	0	0	0	23	33	22	36	49	27	6	8	0	0	0	204	15.07	9.51	
3.00	3.50	0	0	0	4	37	48	19	39	64	22	12	0	0	0	245	18.09	10.14	
3.50	4.00	0	0	0	1	5	52	20	13	22	17	7	5	2	0	144	10.64	10.19	
4.00	4.50	0	0	0	0	1	23	25	11	12	13	9	8	3	0	105	7.75	10.82	
4.50	5.00	0	0	0	0	0	10	24	15	4	6	11	14	3	0	87	6.43	11.39	
5.00	5.50	0	0	0	0	0	6	15	23	8	0	2	5	4	0	63	4.65	10.92	
5.50	6.00	0	0	0	0	0	0	7	22	8	1	3	4	5	0	50	3.69	11.56	
6.00	6.50	0	0	0	0	0	0	6	10	13	0	0	1	0	0	30	2.22	10.79	
6.50	7.00	0	0	0	0	0	0	2	5	10	2	0	4	2	0	25	1.85	12.07	
7.00	7.50	0	0	0	0	0	0	4	4	6	1	0	0	0	0	15	1.11	10.94	
7.50	8.00	0	0	0	0	0	0	2	1	1	4	0	0	2	0	10	0.74	12.21	
8.00	8.50	0	0	0	0	0	0	0	5	0	1	0	0	2	0	8	0.59	12.19	
8.50	9.00	0	0	0	0	0	0	1	6	3	0	0	0	0	0	10	0.74	10.82	
9.00	9.50	0	0	0	0	0	0	0	1	1	1	0	0	0	0	3	0.22	11.53	
Freq		1	11	23	95	147	220	207	229	193	89	69	43	23	4	1354			
%		0.07	0.81	1.70	7.02	10.8	16.2	15.2	16.9	14.2	6.57	5.10	3.18	1.70	0.30				
MHs		1.02	1.24	1.38	2.22	2.43	3.18	3.74	4.20	4.03	3.76	3.48	4.77	5.63	1.04				

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 65 of 129

Title: METOCEAN DATA

5.6.12.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (SW)

Tp =>		3	4	5	6	7	8	9	10	11	12	13	14	15	Ocorr. Hs1	% Hs1
Hs1		4	5	6	7	8	9	10	11	12	13	14	15	16		
0.00	0.50	1 0.44 9.28 98	0	0	0	0	0	0	0	0	0	0	0	0	1	0.14
0.50	1.00	6 0.58 7.71 45	10 0.65 8.23 45	3 0.72 6.05 0	3 0.22 3.05 45	0	1 0.90 8.55 44	1 0.38 3.36 262	0	1 0.38 3.42 316	1 0.38 3.34 341	0	1 0.96 4.58 319	0	27	3.66
1.00	1.50	0	8 0.83 7.90 90	47 1.09 8.06 68	10 0.79 7.91 68	3 0.79 4.07 270	6 1.07 4.75 158	2 1.32 6.92 68	4 1.17 5.09 158	0	2 0.40 3.45 270	0	0	0	82	11.13
1.50	2.00	0	2 1.66 11.08 113	37 1.34 8.08 45	75 1.20 8.28 68	18 1.50 8.55 68	9 1.26 7.70 135	2 0.28 3.05 135	8 1.63 5.14 45	0	1 1.77 6.62 23	1 1.57 5.96 22	0	0	153	20.76
2.00	2.50	0	1 1.49 8.63 48	6 1.16 7.37 45	71 1.29 8.06 68	50 1.16 8.47 90	14 1.20 9.23 90	2 1.88 9.23 135	13 1.06 6.92 158	6 1.05 5.63 68	1 1.68 5.50 41	0	1 1.39 5.62 167	0	165	22.39
2.50	3.00	0	0	0	6 1.89 8.79 45	45 1.30 9.52 90	43 1.30 9.52 68	3 0.69 8.21 68	8 1.01 4.38 158	11 0.93 4.58 293	4 1.20 3.77 45	2 0.98 6.68 68	1 1.77 6.22 238	0	123	16.69
3.00	3.50	0	0	0	0	8 1.14 7.91 45	28 0.81 9.44 68	13 1.05 8.97 68	1 1.74 10.97 132	2 0.28 3.05 293	2 0.28 4.11 135	6 0.70 6.29 68	6 2.45 6.57 270	0	66	8.96
3.50	4.00	0	0	0	0	1 1.43 8.85 126	17 0.95 12.94 113	24 1.23 9.00 45	3 0.28 8.52 23	1 0.40 3.76 281	0	0	3 1.93 5.99 270	1 1.48 5.19 159	50	6.78
4.00	4.50	0	0	0	0	0	4 1.00 9.05 45	13 1.25 8.98 68	6 0.86 10.29 180	0	0	0	0	0	23	3.12
4.50	5.00	0	0	0	0	0	1 1.25 9.09 140	6 1.60 10.69 180	3 0.63 10.62 90	1 0.78 10.74 95	0	0	0	0	11	1.49
5.00	5.50	0	0	0	0	0	0	3 2.27 9.99 135	9 0.78 10.33 68	2 0.72 9.18 45	1 0.33 10.14 39	0	0	0	15	2.04
5.50	6.00	0	0	0	0	0	0	1 4.02 14.09 218	4 1.05 10.72 90	0	1 0.18 10.29 38	0	0	0	6	0.81
6.00	6.50	0	0	0	0	0	0	0	6 2.22 14.20 135	4 0.64 8.82 0	0	0	0	0	10	1.36
6.50	7.00	0	0	0	0	0	0	0	0	4 2.26 13.18 158	0	0	0	0	4	0.54
7.00	7.50	0	0	0	0	0	0	0	0	1 1.28 11.89 194	0	0	0	0	1	0.14
Freq.		7	21	93	165	125	123	70	65	33	13	9	12	1	737	
%		0.95	2.85	12.62	22.39	16.96	16.69	9.50	8.82	4.48	1.76	1.22	1.63	0.14		

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 66 of 129

Title: METOCEAN DATA

5.6.13 Distribution of Hs versus Tp for Primary Peak Waves approaching from WSW Direction

5.6.13.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (WSW)

Hs(m)		Tp(s)										Freq	%	MTp
		3	4	5	6	7	8	9	10	11				
		4	5	6	7	8	9	10	11	12				
0.00	0.50	0	0	0	0	0	0	0	0	0	0	0.00	0.00	
0.50	1.00	2	0	0	0	1	0	0	1	0	4	2.44	6.38	
1.00	1.50	0	1	2	0	1	2	0	0	0	6	3.66	6.64	
1.50	2.00	0	0	6	0	2	1	0	0	2	11	6.71	7.37	
2.00	2.50	0	0	2	4	4	2	2	0	0	14	8.54	7.48	
2.50	3.00	0	0	0	5	10	11	1	0	0	27	16.46	7.76	
3.00	3.50	0	0	0	1	20	10	1	0	0	32	19.51	7.86	
3.50	4.00	0	0	0	0	2	6	1	0	0	9	5.49	8.28	
4.00	4.50	0	0	0	0	0	11	5	0	0	16	9.76	8.74	
4.50	5.00	0	0	0	0	0	0	16	4	0	20	12.20	9.69	
5.00	5.50	0	0	0	0	0	2	4	7	3	16	9.76	10.19	
5.50	6.00	0	0	0	0	0	0	4	5	0	9	5.49	9.91	
Freq		2	1	10	10	40	45	34	17	5	164			
%		1.22	0.61	6.10	6.10	24.39	27.44	20.73	10.37	3.05				
MHs		0.84	1.17	1.74	2.69	2.93	3.39	4.58	4.99	4.05				

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **67 of 129**

Title: **METOCEAN DATA**

5.6.13.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (WSW)

Tp =>		3	4	5	6	7	8	9	10	11	Ocorr. Hs1	% Hs1
Hs1		4	5	6	7	8	9	10	11	12		
0.00	0.50	0	0	0	0	0	0	0	0	0	0	0.00
0.50	1.00	2 0.57 12.90 113	6 0.89 7.26 90	0	0	0	0	0	0	2 0.50 3.42 315	10	2.50
1.00	1.50	0	9 0.92 10.24 113	25 1.00 8.30 68	0	0	0	0	0	1 0.42 3.53 324	35	8.75
1.50	2.00	0	0	24 1.49 8.74 90	51 1.32 8.90 90	9 1.41 7.87 68	2 1.69 11.21 180	1 1.83 7.95 157	0	1 1.60 7.54 43	88	22.00
2.00	2.50	0	1 1.83 10.47 123	4 2.03 12.58 90	45 1.34 8.10 68	29 1.59 10.04 113	8 1.69 9.23 113	1 1.78 11.69 156	0	0	88	22.00
2.50	3.00	0	0	0	7 1.41 9.43 90	40 1.39 10.94 180	16 1.13 9.72 90	0	0	0	63	15.75
3.00	3.50	0	0	0	0	17 1.54 8.83 45	27 1.17 9.47 113	2 1.16 14.65 90	0	0	46	11.50
3.50	4.00	0	0	0	0	1 0.86 8.10 115	13 1.75 11.86 180	9 0.99 8.97 90	0	0	23	5.75
4.00	4.50	0	0	0	0	0	10 1.36 8.43 90	8 1.02 9.34 68	1 1.25 10.80 168	0	19	4.75
4.50	5.00	0	0	0	0	0	0	10 1.10 9.79 68	3 1.66 10.29 180	0	13	3.25
5.00	5.50	0	0	0	0	0	0	2 0.90 8.35 68	7 1.02 10.32 68	0	9	2.25
5.50	6.00	0	0	0	0	0	0	0	6 1.32 10.76 203	0	6	1.50
Freq.		2	16	53	103	96	76	33	20	1	400	
%		0.50	4.00	13.25	25.75	24.00	19.00	8.25	5.00	0.25		

EIW1 2022-02-07T18:22:29

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.



PETROBRAS

5.6.14 Distribution of Hs versus Tp for Primary Peak Waves approaching from W Direction

5.6.14.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (W)

Hs(m)		Tp(s)							Freq	%	MTp
		3	4	5	6	7	8	9			
		4	5	6	7	8	9	10			
0.00	0.50	0	0	0	0	0	0	0	0	0.00	0.00
0.50	1.00	3	0	0	0	0	0	0	3	14.29	3.69
1.00	1.50	0	1	0	0	0	1	0	2	9.52	6.90
1.50	2.00	0	0	1	4	1	1	0	7	33.33	6.63
2.00	2.50	0	0	0	0	2	0	0	2	9.52	7.86
2.50	3.00	0	0	0	0	1	1	0	2	9.52	7.77
3.00	3.50	0	0	0	1	1	0	0	2	9.52	7.11
3.50	4.00	0	0	0	0	0	0	0	0	0.00	0.00
4.00	4.50	0	0	0	0	0	2	1	3	14.29	8.58
Freq		3	1	1	5	5	5	1	21		
%		14.29	4.76	4.76	23.81	23.81	23.81	4.76			
MHs		0.68	1.28	1.96	2.09	2.46	2.82	4.46			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 69 of 129


Title: METOCEAN DATA

5.6.14.2 – Primary H_{s1} versus T_{p1} and associated Secondary H_{s2} , T_{p2} , $Dirp_2$ for Bimodal sea states (W)

TP =>	3	4	5	6	7	8	9	10	Ocorr. Hs1	% Hs1
Hs1	4	5	6	7	8	9	10	11		
0.00	0.50	0	0	0	0	0	0	0	0	0.00
0.50	1.00	2 0.47 8.74 113	2 0.89 6.54 45	0	0	0	0	0	4	2.88
1.00	1.50	0	6 1.08 8.95 68	7 1.05 11.11 203	1 0.31 3.06 207	0	0	0	14	10.07
1.50	2.00	0	2 0.90 6.64 90	15 1.33 8.08 45	12 1.41 8.82 113	1 1.44 7.84 71	2 1.57 9.70 68	1 1.49 6.77 40	0	33 23.74
2.00	2.50	0	1 2.24 10.47 117	2 1.94 7.48 68	18 1.48 11.00 113	5 1.93 9.68 45	3 0.60 4.04 225	1 1.67 7.11 42	0	30 21.58
2.50	3.00	0	0	0	8 1.61 7.80 68	11 1.69 9.51 203	3 1.50 9.79 113	0	0	22 15.83
3.00	3.50	0	0	0	1 1.99 8.17 182	6 0.80 7.54 68	6 0.77 8.21 45	0	0	13 9.35
3.50	4.00	0	0	0	0	1 1.17 7.80 83	8 1.50 9.60 135	1 1.36 9.12 171	0	10 7.19
4.00	4.50	0	0	0	0	0	7 1.22 8.84 45	4 1.30 8.97 113	0	11 7.91
4.50	5.00	0	0	0	0	0	0	1 2.32 14.04 161	1 1.52 9.79 143	2 1.44
Freq.		2	11	24	40	24	29	8	1	139
%		1.44	7.91	17.27	28.78	17.27	20.86	5.76	0.72	

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

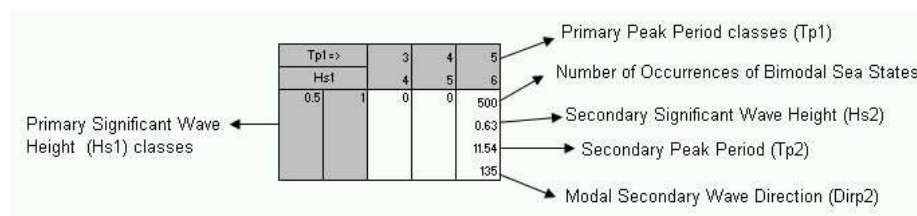

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 70 of 129

Title: METOCEAN DATA

5.6.15 Distribution of Hs versus Tp for Primary Peak Waves approaching from WNW Direction

5.6.15.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (WNW)

Hs(m)		Tp(s)						Freq	%	MTp
		3	4	5	6	7	8			
		4	5	6	7	8	9			
0.00	0.50	0	0	0	0	0	0	0	0.00	0.00
0.50	1.00	1	0	0	0	0	0	1	16.67	3.38
1.00	1.50	0	0	0	1	0	1	2	33.33	7.46
1.50	2.00	0	0	0	0	0	1	1	16.67	8.56
2.00	2.50	0	0	0	0	1	0	1	16.67	7.62
2.50	3.00	0	0	0	1	0	0	1	16.67	6.75
3.00	3.50	0	0	0	0	0	0	0	0.00	0.00
3.50	4.00	0	0	0	0	0	0	0	0.00	0.00
4.00	4.50	0	0	0	0	0	0	0	0.00	0.00
4.50	5.00	0	0	0	0	0	0	0	0.00	0.00
Freq		1	0	0	2	1	2	6		
%		16.67	0.00	0.00	33.33	16.67	33.33			
MHs		0.78	0.00	0.00	1.96	2.32	1.52			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 71 of 129


Title: METOCEAN DATA

5.6.15.2 – Primary H_{s1} versus T_{p1} and associated Secondary H_{s2} , T_{p2} , Dir_{p2} for Bimodal sea states (WNW)

Tp =>		3	4	5	6	7	8	Ocorr. Hs1	% Hs1
Hs1		4	5	6	7	8	9		
0.00	0.50	0	0	0	0	0	0	0	0.00
0.50	1.00	3	2		1			6	11.54
		0.46	0.58	0	0.54	0	0		
		4.87	9.45		4.17				
		23	45		216				
1.00	1.50	0	4	4	0	0	0	8	15.38
			0.52	0.51					
			9.95	7.34					
		158		68					
1.50	2.00	0	0	7	2	2	0	11	21.15
				1.55	1.43	1.31			
				8.03	8.75	5.48			
		68		113	203				
2.00	2.50	0	1	0	10	1	1	13	25.00
			1.49		1.54	0.49	0.36		
			9.72		7.95	3.30	3.32		
		161		45	19	232			
2.50	3.00	0	0	1	4	4	0	9	17.31
				1.77	1.78	1.76			
				10.34	6.77	9.14			
		174		180	113				
3.00	3.50	0	0	0	0	3	1	4	7.69
						1.58	1.48		
						9.30	8.37		
						113	120		
3.50	4.00	0	0	0	0	0	0	0	0.00
4.00	4.50	0	0	0	0	0	1	1	1.92
							1.50		
							10.35		
							62		
4.50	5.00	0	0	0	0	0	0	0	0.00
Freq.		3	7	12	17	10	3	52	
%		5.77	13.46	23.08	32.69	19.23	5.77		

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

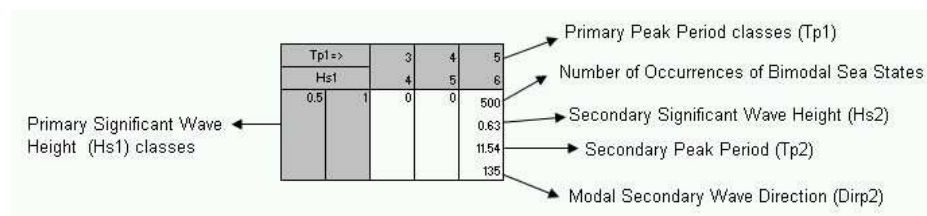

5.6.16 Distribution of H_s versus T_p for Primary Peak Waves approaching from NW Direction

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 72 of 129

Title: METOCEAN DATA

5.6.16.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (NW)

Hs(m)		Tp(s)						Freq	%	MTp
		3	4	5	6	7	8			
		4	5	6	7	8	9			
0.00	0.50	0	0	0	0	0	0	0	0.00	0.00
0.50	1.00	0	0	0	0	0	0	0	0.00	0.00
1.00	1.50	0	1	0	0	0	0	1	100.00	4.22
1.50	2.00	0	0	0	0	0	0	0	0.00	0.00
2.00	2.50	0	0	0	0	0	0	0	0.00	0.00
2.50	3.00	0	0	0	0	0	0	0	0.00	0.00
3.00	3.50	0	0	0	0	0	0	0	0.00	0.00
3.50	4.00	0	0	0	0	0	0	0	0.00	0.00
Freq		0	1	0	0	0	0	1		
%		0.00	100.00	0.00	0.00	0.00	0.00			
MHs		0.00	1.10	0.00	0.00	0.00	0.00			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **73 of 129**


Title: **METOCEAN DATA**

5.6.16.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (NW)

Tp =>		3	4	5	6	7	8	Ocorr. Hs1	% Hs1
Hs1		4	5	6	7	8	9		
0.00	0.50	0	0	0	0	0	0	0	0.00
0.50	1.00	1	4				1	6	15.79
		0.55	0.89	0	0	0.13	0		
		5.22	7.30			3.05			
		28	90			258			
1.00	1.50	0	6	2				8	21.05
			0.75	0.96					
			5.63	7.63					
			68	45					
1.50	2.00	0	1	5	1	2	2	11	28.95
			1.56	1.70	1.80	1.33	0.83		
			9.83	7.79	7.64	5.50	4.46		
			99	45	54	203	180		
2.00	2.50	0	0	0	6		2	8	21.05
					1.98		2.04		
					8.43		9.29		
					45		90		
2.50	3.00	0	0	0	2	1		3	7.89
					1.63	2.27	0		
					6.93	9.32			
					90	86			
3.00	3.50	0	0	0		1		1	2.63
						1.83	0		
						7.59			
						114			
3.50	4.00	0	0	0		1		1	2.63
						1.65	0		
						8.21			
						77			
Freq.		1	11	7	9	6	4	38	
%		2.63	28.95	18.42	23.68	15.79	10.53		

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

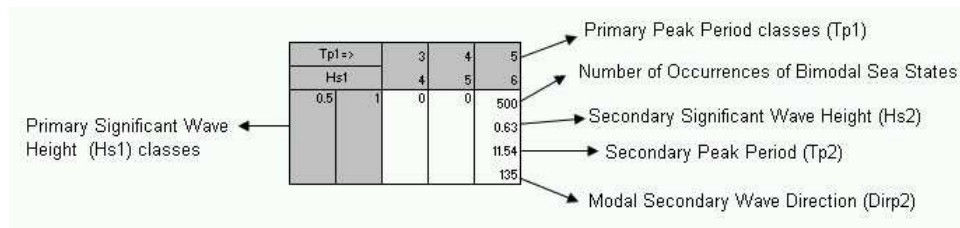

EIW1 2022-02-07T18:22:29



PETROBRAS

5.6.17 Distribution of Hs versus Tp for Primary Peak Waves approaching from NNW Direction

5.6.17.1 – Primary Hs1 versus Tp1 for Unimodal sea-states (NNW)

Hs(m)		Tp(s)						Freq	%	MTp
		3	4	5	6	7	8			
		4	5	6	7	8	9			
0.00	0.50	0	0	0	0	0	0	0	0.00	0.00
0.50	1.00	0	1	0	0	1	0	2	18.18	5.91
1.00	1.50	0	2	4	0	0	3	9	81.82	6.15
1.50	2.00	0	0	0	0	0	0	0	0.00	0.00
2.00	2.50	0	0	0	0	0	0	0	0.00	0.00
2.50	3.00	0	0	0	0	0	0	0	0.00	0.00
Freq		0	3	4	0	1	3	11		
%		0.00	27.27	36.36	0.00	9.09	27.27			
MHs		0.00	1.20	1.36	0.00	0.90	1.26			

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **75 of 129**


Title: **METOCEAN DATA**

5.6.17.2 – Primary Hs1 versus Tp1 and associated Secondary Hs2, Tp2, Dirp2 for Bimodal sea states (NNW)

Tp =>		3	4	5	6	7	8	Ocorr. Hs1	% Hs1
Hs1		4	5	6	7	8	9		
0.00	0.50	0	0	0	0	0	0	0	0.00
0.50	1.00	4	5	0	0	2	0	11	15.71
		0.55	0.69						
		11.79	10.56						
1.00	1.50	113	158	10	14	1	0	27	38.57
		1.03	1.14						
		7.68	7.16						
1.50	2.00	68	68	13	14	5	0	19	27.14
		1.58	1.73						
		7.49	8.06						
2.00	2.50	68	68	1	5	1	0	7	10.00
		2.05	1.83						
		8.28	7.87						
2.50	3.00	52	90	3	5	3	0	6	8.57
		2.21	1.86						
		8.71	8.45						
Freq.		4	15	28	14	7	2	70	
%		5.71	21.43	40.00	20.00	10.00	2.86		

SOURCE: Modeled wave data - JIP BOMOSHU (Brazil Offshore Metocean Storm Hindcast Update) and GROW Fine SAB, OceanWeather Inc., evaluated with in-situ wave measured data. The wave data was tabulated at 3-hour intervals.

The legend below explains how to interpret the information on the cells of the table.

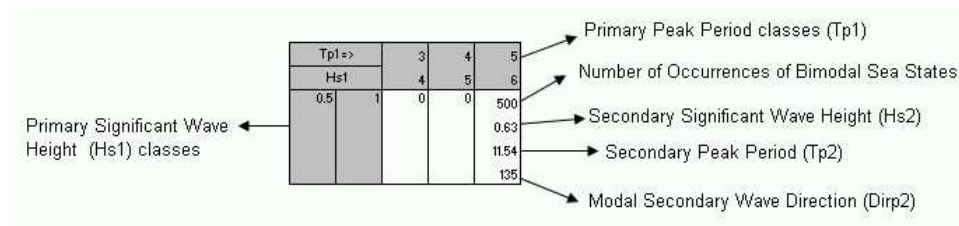

EIW1 2022-02-07T18:22:29



PETROBRAS

6. CURRENT DATA

The Buzios Field is located at the northern border of São Paulo Plateau, where the oceanic flow is highly variable and sometimes affected by large scale eddies. The Brazil Current is mainly flowing southwestward (Figure 6.1.1) with its surface jet core between the isobath contours of 200 m and 1000 m, close to the upper continental slope, when sometimes it is observed strong westward currents. Under some perturbed conditions, mesoscale activity such as eddies and meanders can cause a southward displacement of the jet to a position further down the 2000 m isobath (Figure 6.1.2).

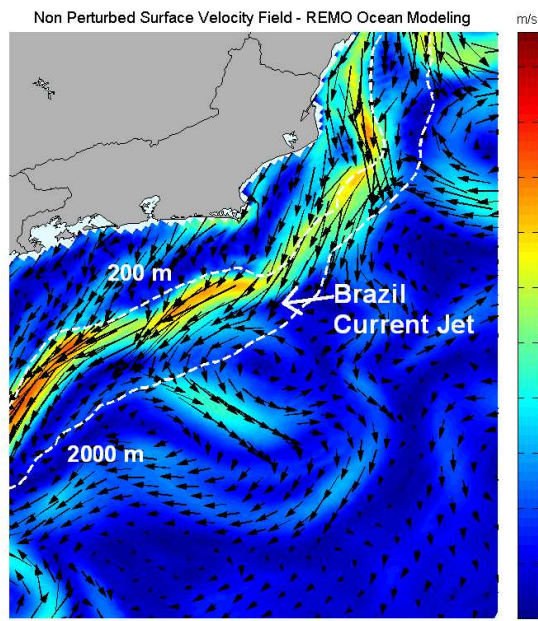


Figure 6.1.1 – Surface current field with the Brazil Current flowing into Santos Basin.

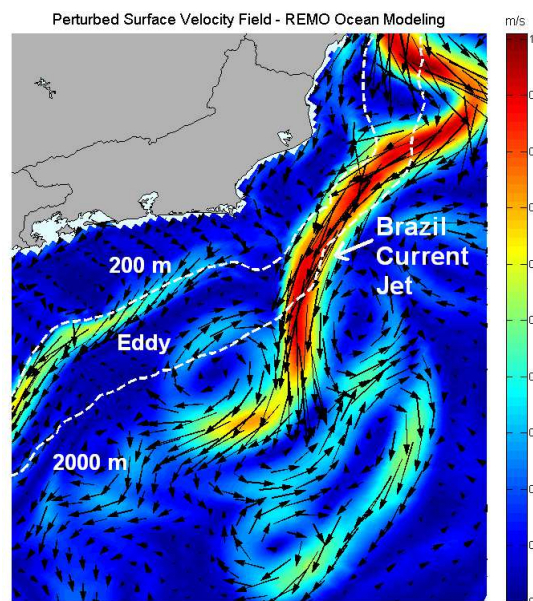


Figure 6.1.2 – Surface current field with a cyclonic eddy offshore

Source: Oceanographic Modeling and Observation Network (REMO)
PETROBRAS research project PT-128.01.11660

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 77 of 129

Title: METOCEAN DATA


6.1 Joint Distribution of Current Speed and Direction at Specific Levels

6.1.1 Joint Distribution of Near Surface Current Speed and Direction

		DIRECTION (°)																	
m/s		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	Freq	%
0.00	0.05	23	35	27	24	18	15	19	20	22	25	26	27	25	29	27	17	379	2.48
0.05	0.10	83	95	89	71	70	68	94	71	82	78	89	86	87	79	85	77	1304	8.52
0.10	0.15	111	95	100	67	87	88	90	76	82	90	143	154	155	137	132	102	1709	11.16
0.15	0.20	108	123	96	60	62	96	74	75	105	120	119	142	205	178	116	107	1786	11.66
0.20	0.25	92	102	71	28	46	70	63	98	97	89	121	137	180	167	103	87	1551	10.13
0.25	0.30	49	85	48	19	27	39	36	67	123	101	155	153	141	163	101	65	1372	8.96
0.30	0.35	40	56	26	12	10	14	23	39	148	143	146	195	151	122	99	47	1271	8.30
0.35	0.40	19	13	6	4	6	6	12	39	96	142	135	208	118	85	59	47	995	6.50
0.40	0.45	21	9	4	3	1	3	10	48	86	100	137	183	103	76	59	39	882	5.76
0.45	0.50	14	4	1	0	0	0	3	31	106	134	136	145	83	77	46	54	834	5.45
0.50	0.55	11	0	0	0	0	0	0	26	84	134	132	116	51	60	43	46	703	4.59
0.55	0.60	10	0	0	0	0	0	0	5	42	103	113	121	52	53	48	18	565	3.69
0.60	0.65	8	0	0	0	0	0	0	3	15	63	125	97	38	46	43	9	447	2.92
0.65	0.70	4	0	0	0	0	0	0	1	13	48	107	71	22	24	15	14	319	2.08
0.70	0.75	2	0	0	0	0	0	0	0	6	43	107	62	19	14	16	16	285	1.86
0.75	0.80	3	0	0	0	0	0	0	0	0	46	101	76	12	12	15	13	278	1.82
0.80	0.85	1	0	0	0	0	0	0	0	0	30	93	53	13	31	19	10	250	1.63
0.85	0.90	0	0	0	0	0	0	0	0	0	10	52	34	6	19	9	2	132	0.86
0.90	0.95	0	0	0	0	0	0	0	0	0	0	60	27	10	13	7	1	118	0.77
0.95	1.00	0	0	0	0	0	0	0	0	0	0	35	10	5	10	1	0	61	0.40
1.00	1.05	0	0	0	0	0	0	0	0	0	0	24	3	1	4	3	0	35	0.23
1.05	1.10	0	0	0	0	0	0	0	0	0	0	11	1	0	5	0	0	17	0.11
1.10	1.15	0	0	0	0	0	0	0	0	0	0	13	0	0	0	0	0	13	0.08
1.15	1.20	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	3	0.02
1.20	1.25	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00
1.25	1.30	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	0.01
1.30	1.35	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	0.01
Freq		599	617	468	288	327	399	424	599	1107	1499	2185	2101	1477	1404	1046	771	15311	
%		3.91	4.03	3.06	1.88	2.14	2.61	2.77	3.91	7.23	9.79	14.27	13.72	9.65	9.17	6.83	5.04		
Avg		0.22	0.19	0.17	0.15	0.16	0.17	0.17	0.25	0.32	0.40	0.48	0.42	0.32	0.34	0.33	0.30		

EIW1 2022-02-07T18:22:29

SOURCE: PETROBRAS Proprietary Metocean Data (Measured hourly values)

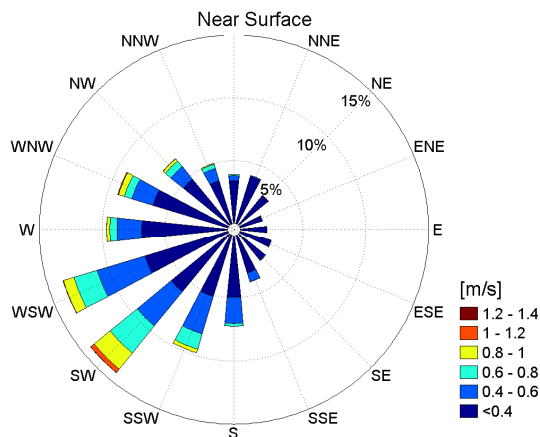



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 78 of 129


Title: METOCEAN DATA

6.1.2 Joint Distribution of Current Speed and Direction at Level 100 m

		DIRECTION (°)																	
m/s		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW	Freq	%
0.00	0.05	30	38	30	30	30	23	25	23	14	23	19	27	21	20	25	24	402	2.63
0.05	0.10	89	96	106	88	56	81	64	61	58	69	69	92	97	106	76	70	1278	8.35
0.10	0.15	133	121	131	94	85	82	91	86	75	103	142	188	143	139	160	132	1905	12.44
0.15	0.20	115	100	89	54	82	97	95	104	103	100	118	175	184	146	136	142	1840	12.02
0.20	0.25	89	63	42	40	54	59	57	81	106	108	97	173	196	156	122	83	1526	9.97
0.25	0.30	50	60	46	21	16	26	30	69	142	152	165	165	165	188	87	76	1458	9.52
0.30	0.35	35	23	46	5	10	18	17	68	141	157	192	216	138	109	104	45	1324	8.65
0.35	0.40	24	3	15	3	5	8	8	40	160	122	184	239	111	94	102	67	1185	7.74
0.40	0.45	15	2	7	0	1	7	4	21	110	88	136	203	61	112	60	55	882	5.76
0.45	0.50	15	1	0	0	0	0	5	9	50	87	114	146	62	77	66	52	684	4.47
0.50	0.55	13	1	0	0	0	0	2	9	36	104	117	138	62	70	51	32	635	4.15
0.55	0.60	8	0	0	0	0	0	0	8	27	105	100	111	52	55	54	23	543	3.55
0.60	0.65	5	0	0	0	0	0	0	3	6	55	113	73	47	29	25	14	370	2.42
0.65	0.70	1	0	0	0	0	0	0	0	8	53	101	72	26	13	9	9	292	1.91
0.70	0.75	0	0	0	0	0	0	0	0	8	50	81	74	16	15	12	2	258	1.69
0.75	0.80	0	0	0	0	0	0	0	0	2	41	97	81	11	30	6	0	268	1.75
0.80	0.85	0	0	0	0	0	0	0	0	0	19	81	51	20	21	5	0	197	1.29
0.85	0.90	0	0	0	0	0	0	0	0	0	1	62	25	7	27	0	0	122	0.80
0.90	0.95	0	0	0	0	0	0	0	0	0	0	43	14	8	8	0	0	73	0.48
0.95	1.00	0	0	0	0	0	0	0	0	0	0	22	7	3	0	0	0	32	0.21
1.00	1.05	0	0	0	0	0	0	0	0	0	0	12	3	0	0	0	0	15	0.10
1.05	1.10	0	0	0	0	0	0	0	0	0	0	17	1	0	0	0	0	18	0.12
1.10	1.15	0	0	0	0	0	0	0	0	0	0	3	0	0	0	0	0	3	0.02
1.15	1.20	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0.00
1.20	1.25	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	0.01
Freq		599	617	468	288	327	399	424	599	1107	1499	2185	2101	1477	1404	1046	771	15311	
%		3.91	4.03	3.06	1.88	2.14	2.61	2.77	3.91	7.23	9.79	14.27	13.72	9.65	9.17	6.83	5.04		
Avg		0.22	0.19	0.17	0.15	0.16	0.17	0.17	0.25	0.32	0.40	0.48	0.42	0.32	0.34	0.33	0.30		

EIW1 2022-02-07T18:22:29

SOURCE: PETROBRAS Propriety Metocean Data (Measured hourly values)

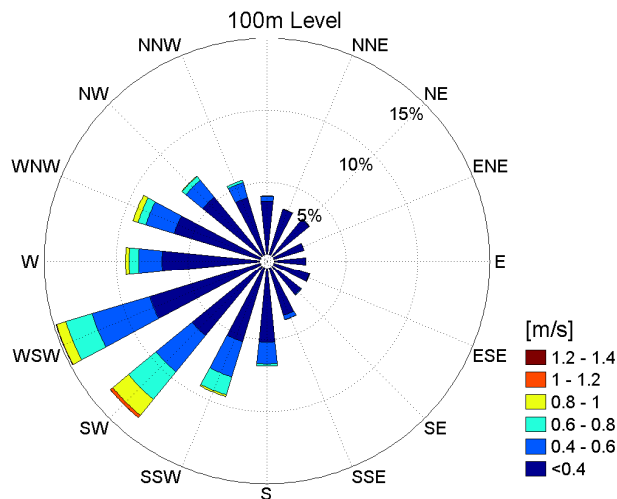



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 79 of 129


Title: METOCEAN DATA

6.1.3 Joint Distribution of Current Speed and Direction at Level 200 m

m/s		DIRECTION (°)																Freq	%
		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
0.00	0.05	49	42	39	49	35	36	37	27	29	23	35	28	42	30	26	34	561	3.66
0.05	0.10	100	96	95	88	103	75	76	64	82	107	110	134	170	135	140	124	1699	11.10
0.10	0.15	164	147	99	79	62	76	72	84	113	173	154	204	289	294	240	158	2408	15.73
0.15	0.20	111	104	82	60	77	93	69	99	159	125	164	265	299	265	187	115	2274	14.85
0.20	0.25	45	71	65	69	77	85	58	71	173	130	184	279	221	180	183	82	1973	12.89
0.25	0.30	42	25	34	27	40	47	52	72	161	126	178	220	166	108	171	81	1550	10.12
0.30	0.35	45	3	3	7	11	36	71	62	93	120	159	151	99	59	101	59	1079	7.05
0.35	0.40	27	11	0	0	3	34	40	42	75	95	115	177	82	52	51	54	858	5.6
0.40	0.45	12	0	0	0	0	3	4	18	62	98	147	193	110	48	65	21	781	5.1
0.45	0.50	1	0	0	0	0	0	0	2	36	104	210	178	63	51	36	9	690	4.51
0.50	0.55	1	0	0	0	0	0	0	6	9	47	164	134	59	43	8	5	476	3.11
0.55	0.60	0	0	0	0	0	0	0	0	1	41	140	85	38	43	7	0	355	2.32
0.60	0.65	0	0	0	0	0	0	0	0	1	43	113	65	20	33	2	0	277	1.81
0.65	0.70	0	0	0	0	0	0	0	0	0	28	75	43	28	11	0	0	185	1.21
0.70	0.75	0	0	0	0	0	0	0	0	0	22	25	27	9	6	0	0	89	0.58
0.75	0.80	0	0	0	0	0	0	0	0	0	7	16	12	5	1	0	0	41	0.27
0.80	0.85	0	0	0	0	0	0	0	0	0	0	2	0	2	0	0	0	4	0.03
0.85	0.90	0	0	0	0	0	0	0	0	0	0	7	0	0	0	0	0	7	0.05
0.90	0.95	0	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	2	0.01
0.95	1.00	0	0	0	0	0	0	0	0	0	0	2	0	0	0	0	0	2	0.01
Freq		597	499	417	379	408	485	479	547	994	1289	2002	2195	1702	1359	1217	742	15311	
%		3.9	3.3	2.7	2.5	2.7	3.17	3.13	3.57	6.49	8.42	13.08	14.34	11.12	8.88	7.95	4.85		
Avg		0.2	0.2	0.1	0.1	0.2	0.19	0.2	0.21	0.24	0.31	0.37	0.33	0.26	0.24	0.22	0.2		

EIW1 2022-02-07T18:22:29

SOURCE: PETROBRAS Propriety Metocean Data (Measured hourly values)

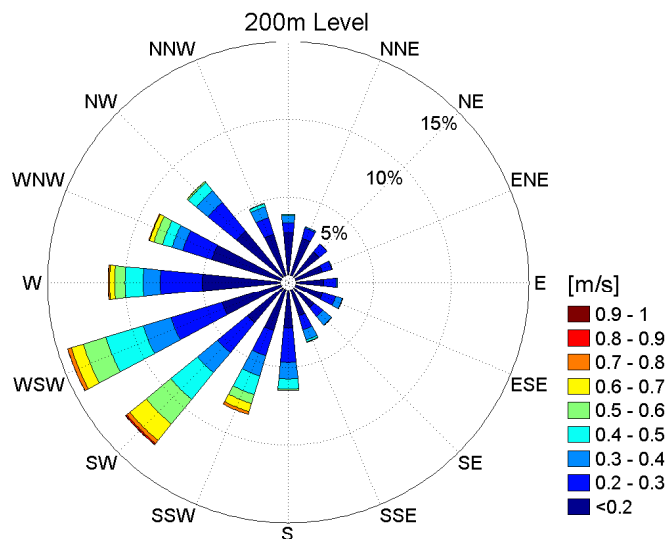



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS


Sheet: 80 of 129

Title: METOCEAN DATA

6.1.4 Joint Distribution of Current Speed and Direction at Level 300 m

m/s		DIRECTION (°)																Freq	%
		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
0.00	0.05	59	55	63	75	43	56	52	45	56	37	57	58	54	49	73	47	879	5.74
0.05	0.10	184	158	155	106	103	113	106	109	135	147	153	197	185	179	169	193	2392	15.62
0.10	0.15	141	137	157	82	90	100	108	163	211	225	208	298	372	303	292	175	3062	20.00
0.15	0.20	62	55	97	47	57	69	95	151	179	170	225	315	323	205	232	141	2423	15.83
0.20	0.25	53	17	40	58	84	47	67	145	158	141	200	281	202	119	175	116	1903	12.43
0.25	0.30	43	9	10	58	33	75	85	85	116	142	171	225	118	64	91	88	1413	9.23
0.30	0.35	19	7	0	7	3	34	52	37	73	110	207	250	89	69	43	51	1051	6.86
0.35	0.40	2	1	0	1	0	6	25	15	32	113	225	197	85	87	61	21	871	5.69
0.40	0.45	0	0	0	0	0	1	2	4	10	68	183	92	73	54	28	0	515	3.36
0.45	0.50	0	0	0	0	0	0	0	0	6	37	139	82	72	27	5	0	368	2.4
0.50	0.55	0	0	0	0	0	0	0	0	6	44	63	70	37	17	0	0	237	1.55
0.55	0.60	0	0	0	0	0	0	0	0	0	12	30	47	26	8	0	0	123	0.8
0.60	0.65	0	0	0	0	0	0	0	0	0	12	21	12	1	3	0	0	49	0.32
0.65	0.70	0	0	0	0	0	0	0	0	0	4	11	0	0	0	0	0	15	0.1
0.70	0.75	0	0	0	0	0	0	0	0	0	4	5	0	0	0	0	0	9	0.06
0.75	0.80	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	1	0.01
Freq		563	439	522	434	413	501	592	754	982	1266	1899	2124	1637	1184	1169	832	15311	
%		3.7	2.9	3.4	2.8	2.7	3.27	3.87	4.92	6.41	8.27	12.40	13.87	10.69	7.73	7.64	5.43		
Avg		0.1	0.1	0.1	0.1	0.1	0.16	0.18	0.18	0.19	0.25	0.29	0.26	0.22	0.2	0.18	0.17		

SOURCE: PETROBRAS Propriety Metocean Data (Measured hourly values).

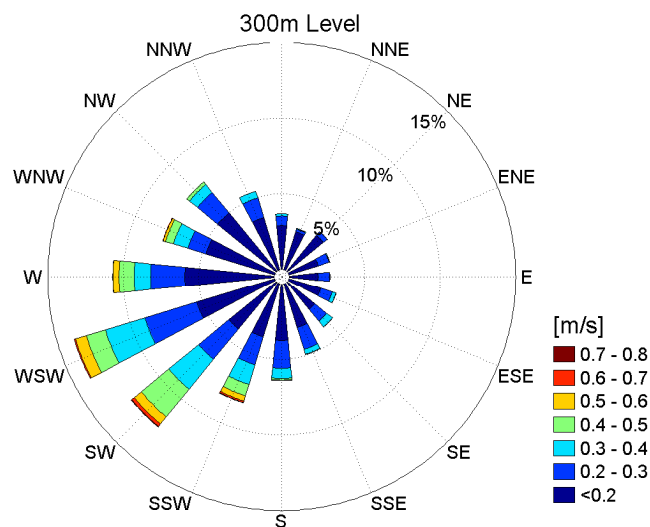

E:\W1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS


Sheet: 81 of 129

Title: METOCEAN DATA

6.1.5 Joint Distribution of Current Speed and Direction at Level 800 m

m/s		DIRECTION (°)																Freq	%
		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
0.00	0.05	147	174	192	187	172	151	150	142	155	126	170	171	193	207	196	173	2706	17.68
0.05	0.10	257	330	271	332	288	247	251	249	298	278	283	367	430	462	404	371	5118	33.44
0.10	0.15	242	236	190	200	254	259	258	240	193	228	236	373	415	365	212	237	4138	27.04
0.15	0.20	142	126	106	69	97	108	129	110	148	154	146	203	182	125	75	96	2016	13.17
0.20	0.25	38	32	31	12	10	25	47	94	89	94	30	64	49	31	39	67	752	4.91
0.25	0.30	26	2	3	4	4	1	28	61	68	39	17	12	8	4	25	120	422	2.76
0.30	0.35	8	0	0	0	1	0	0	15	13	14	3	1	3	1	10	66	135	0.88
0.35	0.40	1	0	0	0	0	0	0	0	6	1	0	0	0	0	0	4	12	0.08
0.40	0.45	0	0	0	0	0	0	0	0	5	0	0	0	0	0	0	0	5	0.03
Freq		861	900	793	804	826	791	863	911	975	934	885	1191	1280	1195	961	1134	15304	
%		5.6	5.9	5.2	5.3	5.4	5.17	5.64	5.95	6.37	6.1	5.78	7.78	8.36	7.81	6.28	7.41		
Avg		0.1	0.1	0.1	0.1	0.1	0.1	0.12	0.13	0.13	0.13	0.11	0.11	0.11	0.1	0.1	0.14		

SOURCE: PETROBRAS Propriety Metocean Data (Measured hourly values).

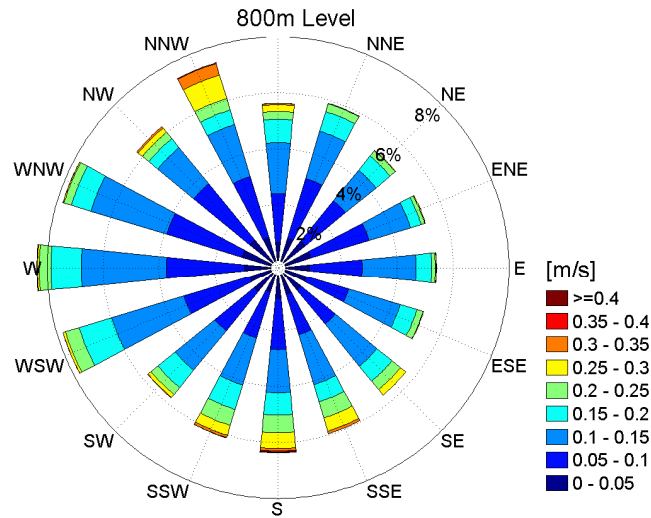

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS


Sheet: 82 of 129

Title: METOCEAN DATA

6.1.6 Joint Distribution of Current Speed and Direction at Level 1200 m

m/s		DIRECTION (°)																Freq	%
		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
0.00	0.05	196	237	223	288	264	281	260	217	194	211	250	257	273	282	271	253	3957	25.86
0.05	0.10	252	382	406	503	475	430	386	330	316	285	403	521	521	480	430	352	6472	42.30
0.10	0.15	127	134	214	337	403	304	228	181	200	149	226	288	199	130	144	152	3416	22.32
0.15	0.20	72	22	45	60	110	124	69	85	95	113	67	62	34	30	47	110	1145	7.48
0.20	0.25	13	4	2	23	27	16	11	29	45	28	11	0	3	2	1	17	232	1.52
0.25	0.30	0	0	0	2	5	0	0	12	22	3	0	0	0	0	0	0	44	0.29
0.30	0.35	0	0	0	0	0	0	0	5	21	0	0	0	0	0	0	0	26	0.17
0.35	0.40	0	0	0	0	0	0	0	0	10	0	0	0	0	0	0	0	10	0.07
Freq		660	779	890	1213	1284	1155	954	859	903	789	957	1128	1030	924	893	884	15302	
%		4.3	5.1	5.8	7.93	8.39	7.55	6.23	5.61	5.9	5.16	6.25	7.37	6.73	6.04	5.84	5.78		
Avg		0.1	0.1	0.1	0.09	0.1	0.09	0.09	0.1	0.11	0.1	0.09	0.09	0.08	0.07	0.08	0.09		

SOURCE: PETROBRAS Propriety Metocean Data (Measured hourly values).

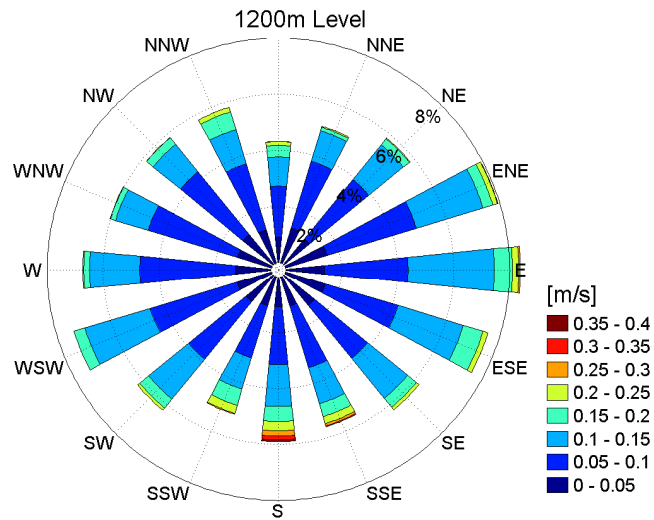

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**


Sheet: **83 of 129**

Title: **METOCEAN DATA**

6.1.7 Joint Distribution of Current Speed and Direction at Level 1600 m

m/s		DIRECTION (°)																Freq	%
		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
0.00	0.05	144	240	321	350	366	349	258	297	268	270	319	358	307	323	253	221	4644	30.35
0.05	0.10	165	237	468	748	750	573	317	235	310	375	512	588	578	342	251	188	6637	43.38
0.10	0.15	16	60	182	533	701	427	130	66	85	147	231	279	184	75	9	11	3136	20.50
0.15	0.20	1	1	25	158	231	127	14	10	25	38	40	59	27	8	0	1	765	5
0.20	0.25	0	0	3	25	41	8	6	5	2	2	3	12	2	0	0	0	109	0.71
0.25	0.30	0	0	0	0	4	0	0	1	3	0	0	0	0	0	0	0	8	0.05
Freq		326	538	999	1814	2093	1484	725	614	693	832	1105	1296	1098	748	513	421	15299	
%		2.1	3.5	6.5	11.86	13.68	9.7	4.74	4.01	4.53	5.44	7.22	8.47	7.18	4.89	3.35	2.75		
Avg		0.1	0.1	0.1	0.09	0.1	0.09	0.07	0.06	0.07	0.08	0.08	0.08	0.08	0.06	0.06	0.05		

SOURCE: PETROBRAS Propriety Metocean Data (Measured hourly values).

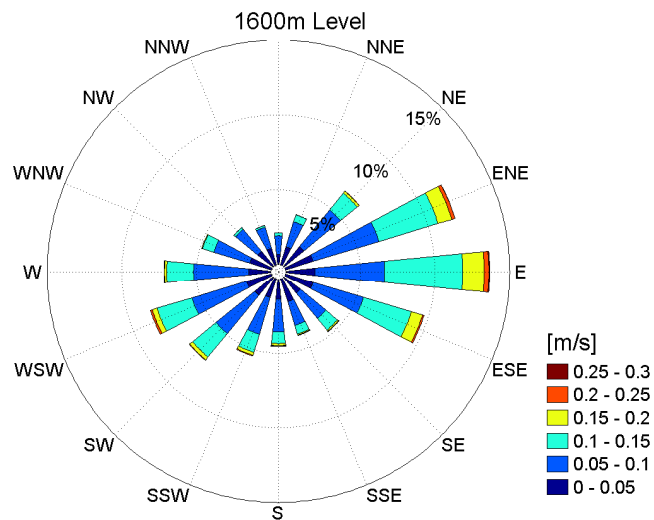

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS


Sheet: 84 of 129

Title: METOCEAN DATA

6.1.8 Joint Distribution of Current Speed and Direction at Level 1800 m

m/s		DIRECTION (°)																Freq	%
		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
0.00	0.05	212	295	401	445	437	490	475	464	403	328	339	327	302	307	250	256	5731	37.44
0.05	0.10	197	209	360	469	530	574	616	622	493	398	494	554	452	380	346	236	6930	45.27
0.10	0.15	22	32	96	153	264	250	194	200	136	112	173	214	200	121	66	38	2271	14.83
0.15	0.20	2	6	5	18	36	53	19	23	12	17	43	35	42	21	9	4	345	2.25
0.20	0.25	0	0	0	0	5	6	2	0	0	2	5	0	0	7	1	0	28	0.18
0.25	0.30	0	0	0	0	0	0	0	0	0	0	0	0	0	4	0	0	4	0.03
Freq		433	542	862	1085	1272	1373	1306	1309	1044	857	1054	1130	996	840	672	534	15309	
%		2.8	3.5	5.6	7.09	8.31	8.97	8.53	8.55	6.82	5.6	6.88	7.38	6.51	5.49	4.39	3.49		
Avg		0.1	0.1	0.1	0.07	0.07	0.07	0.07	0.07	0.06	0.07	0.07	0.08	0.08	0.07	0.07	0.06		

SOURCE: PETROBRAS Propriety Metocean Data (Measured hourly values).

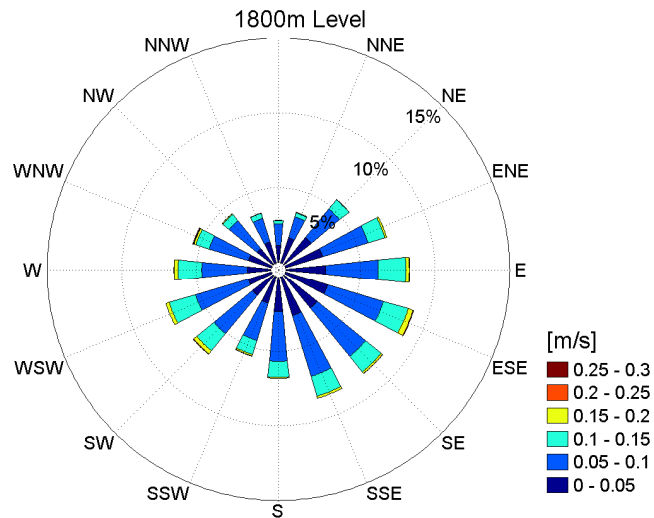

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS


Sheet: 85 of 129

Title: METOCEAN DATA

6.1.9 Joint Distribution of Current Speed and Direction at Level 2150 m

m/s		DIRECTION (°)																Freq	%
		N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW		
0.00	0.05	289	316	449	496	494	397	362	267	192	208	165	174	170	183	221	276	4659	30.43
0.05	0.10	397	599	898	1106	965	764	502	380	230	187	235	225	191	221	247	328	7475	48.82
0.10	0.15	141	187	340	499	419	265	163	93	53	56	51	59	67	71	74	101	2639	17.24
0.15	0.20	16	77	97	93	81	49	15	4	3	7	15	7	0	9	7	11	491	3.21
0.20	0.25	1	7	17	5	13	2	0	0	0	0	0	0	0	0	1	1	47	0.31
Freq		844	1186	1801	2199	1972	1477	1042	744	478	458	466	465	428	484	550	717	15311	
%		5.51	7.75	11.76	14.36	12.88	9.65	6.81	4.86	3.12	2.99	3.04	3.04	2.8	3.16	3.59	4.68		
Avg		0.07	0.08	0.08	0.08	0.08	0.08	0.07	0.07	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.07		

SOURCE: PETROBRAS Propriety Metocean Data (Measured hourly values)..

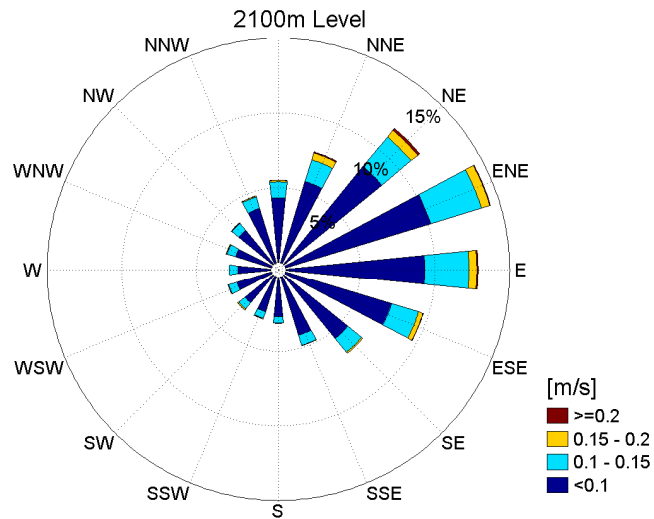

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2 Extreme Current Profile

Figure 6.2.1 presents examples of two measured current profiles from oceanographic mooring deployed on Santos Basin. It is observed that the profile with maximum currents on the surface layer is not correlated with the profile with maximum deep layer currents. Thus, it is presented two sets of extreme current tables in this metocean document. A first set is related to extreme surface currents (tables 6.2.1 to 6.2.16) and the second set is related with extreme mid-water currents (tables 6.2.17 to 6.2.24).

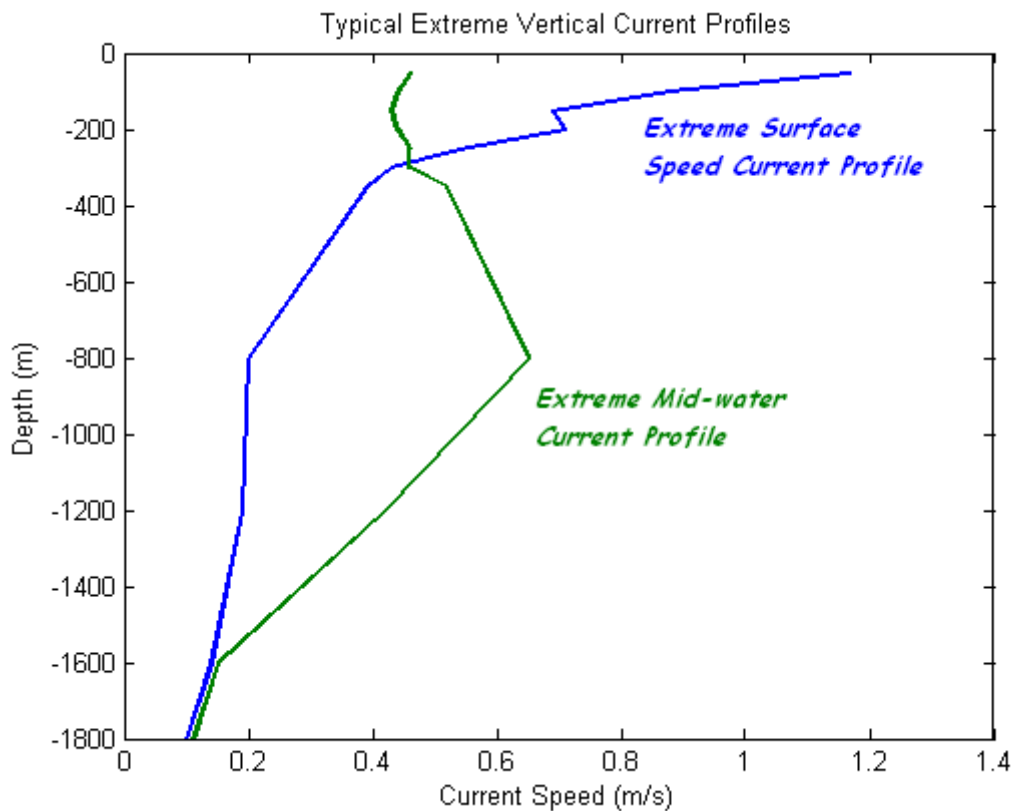


Figure 6.2.1 – Measured profiles with maximum surface (blue) and mid-water (green) currents.

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.1 Profile of Extreme Currents (m/s) With Surface N Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.79	1.00	1.06	1.09	1.13	1.18	1.32	N
100 m	0.71	0.93	0.98	1.01	1.05	1.10	1.24	N
150 m	0.53	0.75	0.80	0.83	0.87	0.92	1.06	N
200 m	0.51	0.65	0.68	0.70	0.73	0.76	0.85	N
250 m	0.44	0.56	0.59	0.61	0.63	0.66	0.74	N
300 m	0.41	0.52	0.55	0.57	0.59	0.61	0.69	N
350 m	0.37	0.47	0.50	0.51	0.53	0.55	0.62	N
800 m	0.20	0.34	0.38	0.40	0.43	0.46	0.56	N
1200 m	0.18	0.23	0.25	0.26	0.28	0.30	0.36	NNE
1600 m	0.18	0.25	0.27	0.28	0.29	0.31	0.36	NE
1800 m	0.16	0.22	0.24	0.25	0.26	0.27	0.31	ENE
2150 m	0.19	0.24	0.25	0.26	0.26	0.27	0.31	ENE
2200 m	0.10	0.14	0.15	0.16	0.17	0.18	0.22	E

SOURCE: PETROBRAS Propriety Metocean Data

6.2.2 Profile of Extreme Currents (m/s) With Surface NNE Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.6	0.74	0.78	0.8	0.82	0.86	0.95	NNE
100 m	0.6	0.74	0.78	0.8	0.82	0.86	0.95	NNE
150 m	0.54	0.7	0.74	0.76	0.78	0.81	0.9	NNE
200 m	0.49	0.60	0.64	0.65	0.67	0.70	0.78	NNE
250 m	0.43	0.53	0.56	0.57	0.59	0.62	0.68	NNE
300 m	0.39	0.48	0.51	0.52	0.53	0.56	0.62	NNE
350 m	0.36	0.44	0.47	0.48	0.49	0.52	0.57	NNE
800 m	0.22	0.34	0.37	0.38	0.4	0.42	0.49	NNE
1200 m	0.2	0.3	0.32	0.33	0.34	0.36	0.41	NNE
1600 m	0.18	0.26	0.27	0.28	0.29	0.31	0.35	NE
1800 m	0.17	0.23	0.24	0.25	0.26	0.27	0.3	NE
2150 m	0.15	0.2	0.21	0.22	0.22	0.23	0.26	ENE
2200 m	0.09	0.13	0.14	0.15	0.15	0.16	0.18	E

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.3 Profile of Extreme Currents (m/s) With Surface NE Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.6	0.69	0.72	0.74	0.76	0.79	0.88	NE
100 m	0.6	0.69	0.72	0.74	0.76	0.79	0.88	NE
150 m	0.42	0.57	0.61	0.63	0.65	0.68	0.77	NE
200 m	0.37	0.52	0.55	0.57	0.59	0.62	0.7	NE
250 m	0.33	0.47	0.51	0.52	0.55	0.57	0.66	NE
300 m	0.31	0.46	0.49	0.51	0.53	0.56	0.64	NE
350 m	0.29	0.44	0.47	0.49	0.51	0.54	0.62	NE
800 m	0.2	0.3	0.33	0.34	0.36	0.38	0.44	NE
1200 m	0.17	0.24	0.26	0.27	0.28	0.3	0.34	ENE
1600 m	0.17	0.24	0.25	0.26	0.27	0.28	0.32	ENE
1800 m	0.16	0.21	0.23	0.23	0.24	0.25	0.28	E
2150 m	0.15	0.19	0.2	0.21	0.21	0.22	0.25	E
2200 m	0.08	0.11	0.12	0.13	0.13	0.14	0.16	ESE

SOURCE: PETROBRAS Propriety Metocean Data

6.2.4 Profile of Extreme Currents (m/s) With Surface ENE Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.56	0.66	0.69	0.71	0.72	0.74	0.79	ENE
100 m	0.46	0.6	0.63	0.65	0.67	0.69	0.77	ENE
150 m	0.46	0.6	0.63	0.65	0.67	0.69	0.77	ENE
200 m	0.41	0.55	0.58	0.59	0.62	0.64	0.72	ENE
250 m	0.39	0.5	0.53	0.55	0.57	0.59	0.66	ENE
300 m	0.35	0.43	0.46	0.48	0.5	0.52	0.6	ENE
350 m	0.27	0.4	0.43	0.44	0.46	0.49	0.56	ENE
800 m	0.21	0.28	0.3	0.31	0.32	0.34	0.39	E
1200 m	0.2	0.23	0.24	0.25	0.25	0.26	0.29	E
1600 m	0.14	0.19	0.2	0.2	0.21	0.22	0.25	E
1800 m	0.13	0.17	0.18	0.19	0.19	0.2	0.22	E
2150 m	0.14	0.17	0.17	0.18	0.18	0.18	0.2	E
2200 m	0.08	0.1	0.1	0.1	0.11	0.11	0.12	SE

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.5 Profile of Extreme Currents (m/s) With Surface E Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.49	0.59	0.63	0.64	0.67	0.69	0.77	E
100 m	0.46	0.55	0.62	0.62	0.65	0.67	0.75	E
150 m	0.46	0.55	0.61	0.61	0.62	0.65	0.73	E
200 m	0.39	0.52	0.55	0.57	0.59	0.61	0.69	E
250 m	0.35	0.48	0.51	0.52	0.54	0.57	0.65	E
300 m	0.3	0.42	0.45	0.47	0.49	0.51	0.55	E
350 m	0.25	0.37	0.4	0.42	0.44	0.46	0.5	E
800 m	0.2	0.27	0.29	0.3	0.31	0.33	0.38	ESE
1200 m	0.17	0.21	0.23	0.23	0.24	0.25	0.29	ESE
1600 m	0.12	0.18	0.19	0.2	0.21	0.22	0.25	ESE
1800 m	0.12	0.17	0.18	0.18	0.19	0.2	0.23	ESE
2150 m	0.14	0.17	0.17	0.18	0.18	0.19	0.2	ESE
2200 m	0.09	0.1	0.11	0.11	0.11	0.12	0.13	ESE

SOURCE: PETROBRAS Propriety Metocean Data

6.2.6 Profile of Extreme Currents (m/s) With Surface ESE Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.51	0.62	0.65	0.67	0.69	0.72	0.79	ESE
100 m	0.45	0.6	0.64	0.66	0.68	0.71	0.78	ESE
150 m	0.45	0.6	0.64	0.66	0.68	0.71	0.78	ESE
200 m	0.38	0.53	0.56	0.58	0.6	0.63	0.72	ESE
250 m	0.35	0.49	0.52	0.54	0.56	0.59	0.67	ESE
300 m	0.29	0.43	0.46	0.48	0.5	0.53	0.58	ESE
350 m	0.24	0.38	0.41	0.43	0.45	0.48	0.53	ESE
800 m	0.19	0.27	0.29	0.3	0.32	0.33	0.39	ESE
1200 m	0.16	0.21	0.22	0.23	0.24	0.25	0.29	ESE
1600 m	0.15	0.17	0.18	0.19	0.2	0.21	0.23	ESE
1800 m	0.15	0.16	0.17	0.18	0.19	0.2	0.21	ESE
2150 m	0.13	0.15	0.16	0.16	0.16	0.17	0.18	SE
2200 m	0.08	0.09	0.09	0.09	0.1	0.1	0.11	SSE

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.7 Profile of Extreme Currents (m/s) With Surface SE Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.61	0.74	0.78	0.8	0.82	0.85	0.94	SE
100 m	0.59	0.72	0.75	0.77	0.81	0.84	0.93	SE
150 m	0.52	0.68	0.71	0.73	0.76	0.79	0.88	SE
200 m	0.47	0.62	0.66	0.68	0.7	0.73	0.82	SE
250 m	0.43	0.58	0.62	0.64	0.66	0.69	0.77	SE
300 m	0.38	0.53	0.57	0.59	0.61	0.64	0.72	SE
350 m	0.35	0.5	0.53	0.55	0.57	0.6	0.69	SE
800 m	0.24	0.35	0.37	0.39	0.4	0.42	0.49	ESE
1200 m	0.17	0.25	0.27	0.28	0.3	0.31	0.36	E
1600 m	0.16	0.21	0.22	0.23	0.24	0.25	0.28	E
1800 m	0.15	0.19	0.2	0.21	0.21	0.22	0.24	E
2150 m	0.14	0.17	0.18	0.18	0.19	0.19	0.21	ENE
2200 m	0.06	0.07	0.07	0.07	0.07	0.08	0.08	ENE

SOURCE: PETROBRAS Propriety Metocean Data

6.2.8 Profile of Extreme Currents (m/s) With Surface SSE Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.7	0.8	0.83	0.84	0.86	0.88	0.93	SSE
100 m	0.64	0.75	0.78	0.79	0.81	0.83	0.9	SSE
150 m	0.59	0.71	0.74	0.76	0.79	0.81	0.85	SSE
200 m	0.52	0.64	0.66	0.68	0.7	0.72	0.79	SSE
250 m	0.46	0.57	0.6	0.62	0.63	0.66	0.73	SSE
300 m	0.42	0.53	0.56	0.57	0.59	0.61	0.68	SSE
350 m	0.39	0.5	0.53	0.54	0.56	0.58	0.65	SSE
800 m	0.28	0.36	0.38	0.39	0.41	0.42	0.47	SE
1200 m	0.19	0.25	0.27	0.28	0.29	0.3	0.34	SE
1600 m	0.16	0.2	0.21	0.22	0.22	0.23	0.26	ESE
1800 m	0.14	0.18	0.19	0.19	0.2	0.2	0.22	ESE
2150 m	0.13	0.16	0.17	0.17	0.18	0.18	0.2	E
2200 m	0.06	0.07	0.08	0.08	0.08	0.09	0.1	E

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.9 Profile of Extreme Currents (m/s) With Surface S Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.82	1.02	1.06	1.09	1.12	1.16	1.27	S
100 m	0.74	0.93	0.98	1	1.03	1.07	1.18	S
150 m	0.74	0.93	0.98	1	1.03	1.07	1.17	S
200 m	0.67	0.86	0.9	0.92	0.95	0.99	1.09	S
250 m	0.63	0.81	0.86	0.88	0.91	0.94	1.05	S
300 m	0.53	0.72	0.76	0.78	0.81	0.84	0.94	S
350 m	0.46	0.64	0.69	0.71	0.73	0.77	0.87	S
800 m	0.23	0.35	0.38	0.39	0.41	0.43	0.5	S
1200 m	0.16	0.23	0.25	0.26	0.27	0.29	0.33	S
1600 m	0.18	0.23	0.24	0.24	0.25	0.26	0.28	WSW
1800 m	0.13	0.18	0.2	0.2	0.21	0.22	0.26	NNW
2150 m	0.13	0.18	0.2	0.2	0.21	0.22	0.26	N
2200 m	0.07	0.1	0.11	0.12	0.12	0.13	0.16	N

SOURCE: PETROBRAS Propriety Metocean Data

6.2.10 Profile of Extreme Currents (m/s) With Surface SSW Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	1.01	1.21	1.3	1.35	1.42	1.5	1.7	SSW
100 m	0.93	1.18	1.24	1.27	1.31	1.36	1.51	SSW
150 m	0.92	1.16	1.22	1.25	1.29	1.34	1.49	SSW
200 m	0.72	0.96	1.02	1.05	1.09	1.13	1.28	SSW
250 m	0.64	0.87	0.93	0.96	1	1.04	1.19	SSW
300 m	0.57	0.79	0.85	0.88	0.92	0.96	1.1	SSW
350 m	0.51	0.74	0.79	0.82	0.86	0.9	1.04	SSW
800 m	0.21	0.36	0.4	0.42	0.44	0.47	0.57	SSW
1200 m	0.19	0.28	0.3	0.31	0.33	0.35	0.41	SSW
1600 m	0.19	0.23	0.25	0.25	0.26	0.27	0.3	WSW
1800 m	0.11	0.17	0.18	0.19	0.2	0.21	0.24	N
2150 m	0.14	0.21	0.23	0.23	0.25	0.26	0.3	N
2200 m	0.06	0.12	0.13	0.14	0.15	0.16	0.2	N

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.11 Profile of Extreme Currents (m/s) With Surface SW Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	1.24	1.56	1.64	1.69	1.74	1.81	2.03	SW
100 m	1.17	1.5	1.58	1.62	1.68	1.75	1.96	SW
150 m	1.04	1.37	1.45	1.49	1.55	1.62	1.83	SW
200 m	0.97	1.29	1.37	1.41	1.47	1.54	1.75	SW
250 m	0.81	1.13	1.21	1.25	1.31	1.37	1.58	SW
300 m	0.74	1.05	1.13	1.17	1.23	1.3	1.5	SW
350 m	0.67	0.98	1.05	1.1	1.15	1.21	1.42	SW
800 m	0.32	0.53	0.58	0.61	0.64	0.69	0.83	SW
1200 m	0.19	0.34	0.38	0.4	0.42	0.46	0.55	SSW
1600 m	0.12	0.21	0.23	0.24	0.26	0.27	0.33	WSW
1800 m	0.15	0.19	0.2	0.21	0.22	0.23	0.26	NW
2150 m	0.13	0.17	0.18	0.19	0.2	0.21	0.25	N
2200 m	0.06	0.12	0.14	0.14	0.16	0.17	0.21	NNW

SOURCE: PETROBRAS Propriety Metocean Data

6.2.12 Profile of Extreme Currents (m/s) With Surface WSW Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	1.1	1.38	1.45	1.49	1.54	1.6	1.79	WSW
100 m	1.07	1.35	1.42	1.46	1.51	1.57	1.76	WSW
150 m	0.98	1.26	1.33	1.37	1.42	1.48	1.67	WSW
200 m	0.83	1.1	1.17	1.21	1.26	1.32	1.51	WSW
250 m	0.72	0.99	1.06	1.1	1.15	1.21	1.39	WSW
300 m	0.63	0.9	0.97	1	1.05	1.11	1.29	WSW
350 m	0.56	0.83	0.89	0.93	0.98	1.04	1.21	WSW
800 m	0.25	0.43	0.48	0.51	0.54	0.58	0.71	WSW
1200 m	0.18	0.32	0.35	0.37	0.39	0.42	0.51	SW
1600 m	0.15	0.21	0.23	0.24	0.25	0.27	0.32	SW
1800 m	0.17	0.2	0.21	0.21	0.22	0.22	0.24	S
2150 m	0.16	0.21	0.22	0.23	0.23	0.25	0.28	SSE
2200 m	0.08	0.11	0.12	0.12	0.13	0.14	0.16	E

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.13 Profile of Extreme Currents (m/s) With Surface W Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	1.1	1.38	1.45	1.5	1.54	1.61	1.8	W
100 m	1.07	1.35	1.42	1.46	1.51	1.57	1.77	W
150 m	0.98	1.26	1.33	1.37	1.42	1.48	1.67	W
200 m	0.83	1.1	1.17	1.21	1.26	1.32	1.51	W
250 m	0.72	0.99	1.06	1.1	1.15	1.21	1.4	W
300 m	0.63	0.9	0.97	1	1.05	1.11	1.3	W
350 m	0.56	0.83	0.89	0.93	0.98	1.04	1.22	W
800 m	0.24	0.43	0.48	0.5	0.54	0.58	0.71	WSW
1200 m	0.18	0.31	0.35	0.37	0.39	0.42	0.51	SW
1600 m	0.14	0.21	0.23	0.24	0.25	0.26	0.31	SW
1800 m	0.17	0.2	0.21	0.21	0.22	0.23	0.25	S
2150 m	0.16	0.21	0.22	0.23	0.24	0.25	0.29	SSE
2200 m	0.09	0.12	0.13	0.13	0.14	0.15	0.17	E

SOURCE: PETROBRAS Propriety Metocean Data

6.2.14 Profile of Extreme Currents (m/s) With Surface WNW Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.97	1.28	1.36	1.41	1.47	1.55	1.8	WNW
100 m	0.87	1.17	1.25	1.3	1.36	1.44	1.7	WNW
150 m	0.75	1.05	1.13	1.18	1.24	1.32	1.58	WNW
200 m	0.62	0.92	1	1.05	1.11	1.18	1.44	WNW
250 m	0.52	0.81	0.89	0.94	0.99	1.07	1.32	WNW
300 m	0.48	0.76	0.85	0.89	0.95	1.02	1.27	WNW
350 m	0.41	0.69	0.77	0.82	0.87	0.95	1.19	WNW
800 m	0.27	0.31	0.33	0.36	0.40	0.45	0.61	W
1200 m	0.12	0.16	0.2	0.22	0.24	0.27	0.38	WSW
1600 m	0.15	0.18	0.18	0.19	0.19	0.2	0.22	SW
1800 m	0.1	0.17	0.19	0.2	0.21	0.23	0.28	SE
2150 m	0.11	0.19	0.22	0.23	0.25	0.27	0.34	SE
2200 m	0.05	0.12	0.14	0.15	0.16	0.18	0.23	ESE

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.15 Profile of Extreme Currents (m/s) With Surface NW Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	1.04	1.37	1.45	1.5	1.56	1.64	1.88	NW
100 m	0.99	1.30	1.38	1.43	1.49	1.56	1.79	NW
150 m	0.88	1.16	1.23	1.27	1.32	1.39	1.59	NW
200 m	0.75	0.99	1.05	1.08	1.13	1.18	1.36	NW
250 m	0.65	0.86	0.91	0.94	0.98	1.03	1.18	NW
300 m	0.57	0.75	0.79	0.82	0.86	0.90	1.03	NW
350 m	0.51	0.67	0.71	0.74	0.77	0.80	0.92	NW
800 m	0.2	0.33	0.35	0.36	0.30	0.42	0.49	WNW
1200 m	0.2	0.26	0.28	0.29	0.30	0.32	0.36	WNW
1600 m	0.13	0.21	0.22	0.24	0.25	0.27	0.32	NW
1800 m	0.11	0.18	0.19	0.20	0.21	0.23	0.27	E
2150 m	0.15	0.20	0.21	0.22	0.23	0.24	0.27	E
2200 m	0.07	0.14	0.16	0.17	0.18	0.2	0.25	E

SOURCE: PETROBRAS Propriety Metocean Data

6.2.16 Profile of Extreme Currents (m/s) With Surface NNW Direction

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.85	1.13	1.20	1.24	1.29	1.36	1.56	NNW
100 m	0.78	1.04	1.10	1.14	1.18	1.25	1.43	NNW
150 m	0.60	0.80	0.85	0.88	0.91	0.96	1.10	NNW
200 m	0.57	0.76	0.80	0.83	0.87	0.91	1.05	NNW
250 m	0.50	0.66	0.71	0.73	0.76	0.80	0.92	NNW
300 m	0.46	0.61	0.65	0.67	0.70	0.74	0.84	NNW
350 m	0.43	0.57	0.61	0.63	0.65	0.69	0.79	NNW
800 m	0.22	0.29	0.31	0.32	0.33	0.35	0.40	NNW
1200 m	0.18	0.24	0.25	0.26	0.27	0.29	0.33	N
1600 m	0.18	0.24	0.25	0.26	0.27	0.29	0.33	NE
1800 m	0.17	0.23	0.24	0.25	0.26	0.27	0.31	E
2150 m	0.17	0.23	0.24	0.25	0.26	0.27	0.31	ESE
2200 m	0.08	0.11	0.11	0.12	0.12	0.13	0.15	ESE

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.17 Profile of Extreme Currents (m/s) With N Direction at Reference Level 800 m

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.31	0.38	0.40	0.41	0.42	0.43	0.48	NW
100 m	0.28	0.33	0.34	0.35	0.36	0.37	0.42	NW
150 m	0.26	0.33	0.35	0.36	0.38	0.39	0.44	NW
200 m	0.28	0.35	0.36	0.37	0.39	0.40	0.45	NW
250 m	0.30	0.38	0.40	0.41	0.42	0.44	0.49	N
300 m	0.31	0.39	0.41	0.42	0.44	0.46	0.51	N
350 m	0.38	0.46	0.48	0.49	0.51	0.53	0.58	N
800 m	0.45	0.52	0.54	0.55	0.56	0.58	0.62	N
1200 m	0.26	0.32	0.34	0.35	0.37	0.38	0.42	N
1600 m	0.08	0.13	0.14	0.15	0.16	0.17	0.20	NE
1800 m	0.12	0.15	0.16	0.16	0.17	0.18	0.20	E
2150 m	0.13	0.16	0.17	0.17	0.18	0.18	0.20	E
2200 m	0.12	0.16	0.16	0.17	0.17	0.18	0.21	E

SOURCE: PETROBRAS Propriety Metocean Data

6.2.18 Profile of Extreme Currents (m/s) With NE Direction at Reference Level 800 m

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.75	0.87	0.90	0.92	0.95	0.98	1.07	NW
100 m	0.65	0.78	0.82	0.84	0.86	0.89	0.99	N
150 m	0.59	0.73	0.77	0.79	0.81	0.85	0.95	N
200 m	0.66	0.80	0.84	0.86	0.89	0.92	1.02	N
250 m	0.50	0.64	0.68	0.70	0.73	0.76	0.86	N
300 m	0.43	0.57	0.61	0.63	0.66	0.69	0.80	N
350 m	0.46	0.61	0.64	0.66	0.69	0.72	0.83	N
800 m	0.30	0.40	0.43	0.44	0.46	0.48	0.55	NE
1200 m	0.17	0.26	0.28	0.29	0.31	0.33	0.39	NE
1600 m	0.21	0.25	0.26	0.26	0.27	0.28	0.31	NE
1800 m	0.12	0.15	0.16	0.17	0.18	0.19	0.21	NE
2150 m	0.11	0.15	0.16	0.16	0.17	0.18	0.21	NE
2200 m	0.11	0.15	0.16	0.17	0.18	0.19	0.22	E

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.19 Profile of Extreme Currents (m/s) With E Direction at Reference Level 800 m

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.52	0.57	0.59	0.59	0.60	0.61	0.65	SE
100 m	0.46	0.51	0.52	0.53	0.54	0.55	0.59	SE
150 m	0.49	0.54	0.55	0.56	0.57	0.58	0.62	SE
200 m	0.47	0.52	0.53	0.53	0.54	0.55	0.59	S
250 m	0.43	0.47	0.49	0.49	0.50	0.51	0.54	S
300 m	0.35	0.40	0.41	0.41	0.42	0.43	0.46	SE
350 m	0.28	0.32	0.33	0.34	0.35	0.35	0.38	SE
800 m	0.35	0.38	0.39	0.39	0.40	0.40	0.43	E
1200 m	0.18	0.24	0.26	0.26	0.28	0.29	0.33	SE
1600 m	0.15	0.20	0.22	0.22	0.23	0.24	0.28	S
1800 m	0.21	0.24	0.25	0.26	0.27	0.28	0.30	S
2150 m	0.16	0.20	0.20	0.21	0.22	0.22	0.25	S
2200 m	0.08	0.10	0.10	0.11	0.11	0.11	0.13	S

SOURCE: PETROBRAS Propriety Metocean Data

6.2.20 Profile of Extreme Currents (m/s) With SE Direction at Reference Level 800 m

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.48	0.53	0.54	0.55	0.56	0.57	0.61	SE
100 m	0.57	0.62	0.63	0.64	0.65	0.67	0.70	SE
150 m	0.46	0.52	0.53	0.54	0.55	0.57	0.61	SE
200 m	0.31	0.36	0.38	0.39	0.40	0.41	0.45	SE
250 m	0.32	0.38	0.39	0.40	0.41	0.43	0.47	SE
300 m	0.32	0.37	0.39	0.40	0.41	0.42	0.46	SE
350 m	0.25	0.31	0.32	0.33	0.34	0.35	0.39	SE
800 m	0.35	0.38	0.39	0.39	0.40	0.41	0.43	SE
1200 m	0.23	0.25	0.25	0.25	0.26	0.26	0.27	S
1600 m	0.29	0.33	0.34	0.34	0.35	0.36	0.39	SW
1800 m	0.26	0.32	0.33	0.34	0.35	0.37	0.41	SW
2150 m	0.22	0.28	0.30	0.31	0.32	0.34	0.38	W
2200 m	0.20	0.26	0.28	0.29	0.30	0.32	0.36	W

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.21 Profile of Extreme Currents (m/s) With S Direction at Reference Level 800 m

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.92	1.02	1.04	1.06	1.08	1.10	1.16	SW
100 m	0.88	0.98	1.00	1.02	1.03	1.06	1.12	SW
150 m	0.74	0.85	0.87	0.89	0.91	0.93	0.99	SW
200 m	0.63	0.73	0.76	0.77	0.79	0.81	0.88	SW
250 m	0.61	0.72	0.74	0.75	0.77	0.79	0.86	SW
300 m	0.51	0.61	0.63	0.64	0.66	0.68	0.74	SW
350 m	0.51	0.61	0.63	0.65	0.66	0.68	0.75	SW
800 m	0.49	0.55	0.57	0.57	0.58	0.60	0.64	S
1200 m	0.17	0.22	0.23	0.24	0.25	0.26	0.29	S
1600 m	0.11	0.15	0.16	0.17	0.17	0.18	0.20	SW
1800 m	0.13	0.18	0.19	0.19	0.20	0.21	0.24	SW
2150 m	0.20	0.24	0.25	0.26	0.27	0.28	0.31	W
2200 m	0.06	0.11	0.12	0.12	0.13	0.14	0.16	W

SOURCE: PETROBRAS Propriety Metocean Data

6.2.22 Profile of Extreme Currents (m/s) With SW Direction at Reference Level 800 m

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.97	1.09	1.12	1.14	1.15	1.18	1.26	SW
100 m	0.99	1.10	1.13	1.15	1.17	1.20	1.28	SW
150 m	0.95	1.07	1.10	1.12	1.14	1.16	1.24	SW
200 m	0.80	0.92	0.95	0.97	0.99	1.02	1.10	SW
250 m	0.75	0.87	0.90	0.92	0.94	0.97	1.04	SW
300 m	0.71	0.83	0.86	0.87	0.89	0.92	1.00	SW
350 m	0.58	0.70	0.73	0.74	0.76	0.79	0.86	SW
800 m	0.35	0.43	0.45	0.46	0.48	0.50	0.55	SW
1200 m	0.27	0.33	0.35	0.35	0.37	0.38	0.42	SW
1600 m	0.19	0.23	0.24	0.25	0.26	0.27	0.30	SW
1800 m	0.10	0.12	0.13	0.13	0.14	0.14	0.16	S
2150 m	0.12	0.12	0.13	0.13	0.14	0.14	0.16	E
2200 m	0.11	0.11	0.12	0.12	0.13	0.13	0.14	NE

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

6.2.23 Profile of Extreme Currents (m/s) With W Direction at Reference Level 800 m

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.94	1.06	1.10	1.11	1.13	1.16	1.25	SW
100 m	0.93	1.05	1.08	1.10	1.12	1.15	1.24	SW
150 m	0.89	1.01	1.05	1.06	1.09	1.11	1.20	SW
200 m	0.75	0.87	0.90	0.92	0.94	0.97	1.06	SW
250 m	0.75	0.87	0.91	0.92	0.95	0.97	1.06	SW
300 m	0.60	0.72	0.75	0.77	0.79	0.82	0.90	SW
350 m	0.54	0.66	0.69	0.70	0.73	0.75	0.84	SW
800 m	0.30	0.35	0.37	0.38	0.39	0.40	0.45	W
1200 m	0.14	0.16	0.17	0.18	0.18	0.19	0.21	SW
1600 m	0.15	0.18	0.19	0.19	0.20	0.20	0.23	SE
1800 m	0.10	0.13	0.14	0.14	0.15	0.16	0.18	SE
2150 m	0.17	0.20	0.21	0.22	0.22	0.23	0.25	E
2200 m	0.08	0.11	0.12	0.13	0.13	0.14	0.16	NE

SOURCE: PETROBRAS Propriety Metocean Data

6.2.24 Profile of Extreme Currents (m/s) With NW Direction at Reference Level 800 m

LEVEL	1	10	20	30	50	100	1000	DIRECTION
50 m	0.56	0.63	0.65	0.66	0.67	0.69	0.74	W
100 m	0.50	0.57	0.59	0.60	0.61	0.63	0.68	W
150 m	0.52	0.60	0.62	0.63	0.64	0.66	0.71	W
200 m	0.60	0.68	0.70	0.71	0.72	0.74	0.80	W
250 m	0.54	0.62	0.64	0.65	0.67	0.69	0.74	W
300 m	0.53	0.61	0.63	0.64	0.66	0.68	0.73	W
350 m	0.49	0.57	0.59	0.60	0.61	0.63	0.68	W
800 m	0.39	0.45	0.47	0.48	0.49	0.50	0.54	NW
1200 m	0.28	0.35	0.36	0.37	0.38	0.40	0.44	NW
1600 m	0.20	0.25	0.26	0.27	0.27	0.29	0.32	W
1800 m	0.18	0.21	0.22	0.23	0.24	0.24	0.27	W
2150 m	0.15	0.18	0.19	0.20	0.20	0.21	0.24	NW
2200 m	0.17	0.21	0.22	0.22	0.23	0.24	0.26	NW

SOURCE: PETROBRAS Propriety Metocean Data

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **99 of 129**

Title: **METOCEAN DATA**

6.3 Current Profiles for Fatigue Analysis

The following tables present current data divided into 4 Classes or Groups of reference levels that can be used for fatigue design. The first sixteen tables are related with a near-surface reference level for the flow direction. This Group was mounted using simultaneous data from all the other levels when the surface flow was going to that specific surface direction. The second Group assumes the 800 m level as reference and represents current profiles with strong mid-water events for which the currents measured at both levels of 800-m and 1200-m were greater than 0.20 and 0.18 m/s respectively. The third Group classifies the profiles into grouped current data whose speeds were greater than 0.15 m/s at 1600 m and 1800 m levels, considering the reference level as 1800 m. And the last Group presents all the current profiles for which the current speeds were greater than 0.12 m/s at 2150m, that were not considered in the other groups. The complete data set covers 15311 hourly profiles (approximately 1.75 years of measured data), of which 12088 are clustered at surface reference level, 1815 at 800 m, 939 at 1800 m and 469 at 2150 m.

6.3.1 Current Profile (m/s) for Fatigue Analysis with N Direction at surface

	0.00		0.10		0.20		0.30		0.40		0.50		0.60		0.70	
	0.10		0.20		0.30		0.40		0.50		0.60		0.70		0.80	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.09	1	0.17	358.9	0.27	1.6	0.36	1.7	0.46	356.3	0.57	354.3	0.65	353.6	0.76	351.8
100	0.19	291.7	0.18	340.5	0.27	359.9	0.35	359.1	0.52	0.9	0.51	2.1	0.5	353.2	0.55	352.7
150	0.21	312.6	0.17	315.6	0.25	359.9	0.31	358.9	0.43	357	0.43	355.8	0.42	342.7	0.42	343
200	0.13	313.5	0.16	1.8	0.19	0.9	0.26	0.9	0.38	358.3	0.36	0.5	0.36	340	0.38	345.2
250	0.1	0.8	0.13	2.8	0.17	23.2	0.22	17.8	0.34	2.7	0.29	354.6	0.36	353.5	0.25	359.1
300	0.1	65.8	0.1	43.2	0.16	41.8	0.21	18.1	0.31	0.8	0.24	0.8	0.32	343.3	0.31	343.7
350	0.11	291.4	0.11	43	0.13	23.7	0.2	1.5	0.25	0.7	0.2	356.5	0.26	358.8	0.24	358.1
800	0.09	72	0.12	359.7	0.1	88.9	0.12	48.5	0.15	334.1	0.15	294.7	0.1	339.9	0.08	343.1
1200	0.11	65.7	0.1	110.2	0.09	108.2	0.09	21.4	0.08	45	0.1	69.3	0.13	106.8	0.13	91
1600	0.11	70	0.11	69	0.12	68.2	0.12	90.8	0.06	67.5	0.09	45.8	0.19	67.8	0.17	58.6
1800	0.07	314.4	0.08	134.3	0.06	113.1	0.11	87.2	0.05	87.1	0.12	120.3	0.09	95.7	0.08	81.9
2150	0.08	87.9	0.08	66.5	0.08	67.8	0.14	68.4	0.1	86.3	0.14	64.4	0.12	69.8	0.1	81.3
2200	0.04	357.4	0.05	358.7	0.04	89.5	0.08	109.8	0.04	69.1	0.04	92.3	0.05	45	0.03	43
Sum	95		164		104		50		21		12		12		5	
Perc	0.62%		1.07%		0.68%		0.33%		0.14%		0.08%		0.08%		0.03%	

EIW1 2022-02-07T18:22:29

	0.80	
	0.90	
Depth	Int.	Dir.
50	0.81	349.8
100	0.65	346.3
150	0.44	344.8
200	0.42	348.6
250	0.34	350.4
300	0.32	340.8
350	0.27	351.9
800	0.16	10.6
1200	0.11	109.8
1600	0.13	53.5
1800	0.07	133.1
2150	0.04	104.9
2200	0.05	13
Sum	1	Tot.Dir 464
Perc	0.01%	3.03%

SOURCE: PETROBRAS Propriety Metocean Data.
The complete data set covers 15311 hourly profiles (1.75 years).



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 100 of 129

Title: METOCEAN DATA

6.3.2 Current Profile (m/s) for Fatigue Analysis with NNE Direction at surface

	0.00		0.10		0.20		0.30		0.40	
	0.10		0.20		0.30		0.40		0.50	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.09	22.6	0.17	22.3	0.27	22.2	0.34	20.6	0.45	22
100	0.14	22.2	0.21	1.3	0.28	23	0.3	22.2	0.29	18.5
150	0.11	68.4	0.22	21.5	0.24	1.2	0.28	23.4	0.18	39
200	0.16	1.9	0.14	1.2	0.24	42.5	0.25	43.6	0.11	359.4
250	0.12	45.7	0.14	42.7	0.18	43.5	0.18	43.6	0.31	0
300	0.13	68.1	0.14	21.5	0.17	43.4	0.16	27.3	0.18	1.2
350	0.1	337.4	0.1	23.9	0.15	22.6	0.15	21.2	0.17	2.9
800	0.1	91	0.1	69.1	0.14	47.4	0.13	66.8	0.09	24.4
1200	0.12	90.2	0.12	89.8	0.11	68.8	0.1	109.7	0.07	70.6
1600	0.1	69.1	0.12	90.9	0.12	89.4	0.11	65.8	0.1	93
1800	0.07	222.9	0.08	111.9	0.07	66.8	0.12	44.6	0.11	163.2
2150	0.07	85.9	0.09	69.4	0.12	45.3	0.14	43.2	0.09	157.5
2200	0.04	43.4	0.06	0.7	0.04	90.6	0.05	90.1	0.05	103.7
Sum	110		151		156		63		10	Tot.Dir 490
Perc	0.72%		0.99%		1.02%		0.41%		0.07%	3.20%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.3 Current Profile (m/s) for Fatigue Analysis with NE Direction at surface

	0.00		0.10		0.20		0.30		0.40	
	0.10		0.20		0.30		0.40		0.50	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.08	44.6	0.17	45.3	0.27	43.4	0.34	42	0.44	42.9
100	0.12	64.5	0.19	44	0.33	42.9	0.34	43.3	0.33	51.7
150	0.11	45.8	0.21	43.6	0.26	25.3	0.25	44.6	0.31	45.4
200	0.14	359.8	0.22	66.1	0.21	24.9	0.22	40.8	0.21	1.1
250	0.17	66.1	0.16	45.2	0.2	43.1	0.2	42.3	0.13	21.2
300	0.13	91.8	0.16	67.3	0.2	48	0.2	46	0.16	24.6
350	0.08	90.1	0.15	45.5	0.2	42.9	0.24	66.8	0.21	66.5
800	0.13	22.7	0.15	20.5	0.1	67.1	0.13	89.9	0.11	43.2
1200	0.1	44.6	0.11	65.7	0.1	69.3	0.08	68.6	0.06	67.9
1600	0.1	88.7	0.1	89	0.12	89.3	0.09	86	0.14	117.6
1800	0.06	288.2	0.09	157.8	0.06	111.1	0.11	164.4	0.07	148.2
2150	0.09	43.1	0.08	65.5	0.1	67	0.14	71.7	0.07	111.2
2200	0.04	46.3	0.04	44.2	0.04	68	0.04	70.3	0.04	87.9
Sum	103		151		82		29		5	Tot.Dir 370
Perc	0.67%		0.99%		0.54%		0.19%		0.03%	2.42%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 101 of 129

Title: METOCEAN DATA

6.3.4 Current Profile (m/s) for Fatigue Analysis with ENE Direction at surface

	0.00		0.10		0.20		0.30		0.40	
	0.10		0.20		0.30		0.40		0.50	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.09	68.7	0.17	67.2	0.26	65.1	0.35	62.6	0.42	73
100	0.11	68.6	0.2	68.9	0.28	47.1	0.36	45.1	0.34	50.1
150	0.12	92.4	0.21	69	0.18	88.6	0.26	41.9	0.29	49.9
200	0.15	70.8	0.2	87.7	0.22	65.7	0.23	40.8	0.2	49.9
250	0.1	87.8	0.2	86.7	0.19	65.8	0.22	40.5	0.13	17.1
300	0.15	111.6	0.2	70	0.14	45	0.21	43.2	0.15	40
350	0.1	93	0.15	89	0.17	46.3	0.18	47	0.12	45.8
800	0.12	92.2	0.14	25.4	0.09	44.9	0.12	67.9	0.08	45
1200	0.1	95.8	0.09	109.5	0.09	87	0.11	83.5	0.03	2.4
1600	0.1	90.8	0.09	89.3	0.11	71.4	0.11	90.3	0.12	101.6
1800	0.07	155.1	0.09	158.9	0.08	112.3	0.11	85.1	0.04	81.4
2150	0.08	43	0.08	89.6	0.07	67.9	0.08	68.5	0.08	67.4
2200	0.06	1.8	0.04	46.7	0.04	113.2	0.04	63.3	0.03	79.5
Sum	80		114		36		13		3	Tot.Dir 246
Perc	0.52%		0.74%		0.24%		0.08%		0.02%	1.61%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.5 Current Profile (m/s) for Fatigue Analysis with E Direction at surface

	0.00		0.10		0.20		0.30		0.40	
	0.10		0.20		0.30		0.40		0.50	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.09	89.9	0.16	91.2	0.27	92	0.36	95.1	0.4	98.8
100	0.13	66.1	0.16	91.1	0.2	88	0.32	108.5	0.41	95.7
150	0.13	66.7	0.2	112.8	0.24	111.8	0.42	107.2	0.39	104.8
200	0.24	67.7	0.24	67.8	0.17	113.6	0.36	107.4	0.36	103.6
250	0.28	65.7	0.26	70.9	0.24	112.4	0.4	111.5	0.34	92.3
300	0.12	113.3	0.26	67.9	0.17	108.5	0.25	105.1	0.22	110.1
350	0.1	110.4	0.19	113.5	0.15	113.7	0.26	110.6	0.2	123.1
800	0.09	23.6	0.13	110.8	0.16	90.9	0.15	136	0.1	126.4
1200	0.08	70.2	0.08	335.2	0.13	90.6	0.11	186.6	0.11	180.7
1600	0.08	111.4	0.12	88.9	0.09	86	0.05	294.1	0.04	305.9
1800	0.07	133	0.09	156.2	0.09	293.2	0.07	153.7	0.07	106.6
2150	0.08	66.2	0.08	110.9	0.09	315.6	0.08	84.4	0.09	81.1
2200	0.03	112.8	0.04	65.9	0.03	87.9	0.03	48.7	0.03	52.1
Sum	74		130		61		13		1	Tot.Dir 279
Perc	0.48%		0.85%		0.40%		0.08%		0.01%	1.82%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 102 of 129

Title: METOCEAN DATA

6.3.6 Current Profile (m/s) for Fatigue Analysis with ESE Direction at surface

	0.00		0.10		0.20		0.30		0.40	
	0.10		0.20		0.30		0.40		0.50	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.09	111.7	0.17	113.7	0.26	111.6	0.35	108.2	0.44	118.9
100	0.17	113.7	0.19	113.2	0.26	108.5	0.39	110.4	0.44	106.1
150	0.22	135.3	0.2	115.2	0.31	112.9	0.42	110.7	0.43	117.1
200	0.3	131.7	0.31	133	0.3	113.9	0.38	111.5	0.41	128.3
250	0.23	134.6	0.34	132.1	0.29	116	0.32	115.3	0.35	129.4
300	0.18	86.4	0.32	132.5	0.27	112.4	0.31	129.5	0.28	118.7
350	0.13	113.7	0.25	132.9	0.23	115	0.25	94	0.26	138.1
800	0.13	67.3	0.11	43.2	0.15	134.1	0.14	138.4	0.14	150.1
1200	0.1	91.1	0.12	90.8	0.15	89.1	0.11	182.5	0.06	152.4
1600	0.08	269.7	0.1	89.7	0.1	290.1	0.07	246.4	0.06	6.4
1800	0.08	244.7	0.07	135	0.08	313.3	0.09	334	0.05	87
2150	0.08	110.1	0.07	68.3	0.09	0.2	0.11	26.9	0.08	109.2
2200	0.05	335.3	0.05	24.2	0.04	22.9	0.03	86.5	0.03	66.2
Sum	66		157		97		14		3	Tot.Dir 337
Perc	0.43%		1.03%		0.63%		0.09%		0.02%	2.20%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.7 Current Profile (m/s) for Fatigue Analysis with SE Direction at surface

	0.00		0.10		0.20		0.30		0.40	
	0.10		0.20		0.30		0.40		0.50	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.08	134.5	0.17	135.6	0.26	136.4	0.35	134.1	0.44	134.8
100	0.12	133.2	0.16	113.6	0.27	133.3	0.32	133.8	0.36	130.6
150	0.2	132.2	0.22	112.3	0.23	115.2	0.33	117.9	0.41	129.8
200	0.19	67.2	0.27	111.5	0.32	115.3	0.37	117.2	0.38	117.9
250	0.24	66.7	0.26	114.3	0.29	133.5	0.25	136.8	0.29	131.8
300	0.26	67.2	0.32	131.9	0.3	114.4	0.27	133.5	0.3	133.6
350	0.32	115.5	0.26	114.4	0.23	114.3	0.22	133	0.25	138.5
800	0.14	23.9	0.17	1.3	0.1	178.5	0.13	181.4	0.12	133.3
1200	0.13	89.5	0.09	314.2	0.12	93.6	0.11	157.3	0.06	139.1
1600	0.11	90	0.1	87.4	0.1	65.8	0.1	198.3	0.14	228.1
1800	0.07	132.2	0.09	135.9	0.09	296.2	0.08	156.1	0.12	91
2150	0.09	89.9	0.08	44.6	0.09	360	0.12	68.4	0.12	69.8
2200	0.04	66.4	0.04	45.4	0.04	67.3	0.05	50	0.03	81.6
Sum	88		134		79		31		9	Tot.Dir 341
Perc	0.57%		0.88%		0.52%		0.20%		0.06%	2.23%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 103 of 129

Title: METOCEAN DATA

6.3.8 Current Profile (m/s) for Fatigue Analysis with SSE Direction at surface

	0.00		0.10		0.20		0.30		0.40		0.50		0.60	
	0.10		0.20		0.30		0.40		0.50		0.60		0.70	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.08	158	0.17	158.4	0.26	156.7	0.36	161.7	0.46	159.3	0.53	166.3	0.64	167.1
100	0.13	155.5	0.21	154.8	0.27	158	0.3	154.3	0.34	176.2	0.42	178.5	0.37	164.8
150	0.11	249.5	0.16	113.4	0.25	156.5	0.22	155.1	0.36	156.5	0.58	161.2	0.22	148.9
200	0.14	131.5	0.13	133	0.28	136.7	0.37	176.9	0.35	155.3	0.47	159.4	0.15	216.8
250	0.11	223.6	0.16	155.9	0.18	155.3	0.32	157	0.32	158.2	0.18	183	0.19	205.9
300	0.18	111.2	0.18	157.1	0.21	155.9	0.18	155.7	0.22	178.5	0.29	158.1	0.17	197.7
350	0.1	89.8	0.12	158.5	0.15	134.2	0.21	157.4	0.22	158.4	0.18	201.6	0.11	181.9
800	0.11	88.3	0.14	93.3	0.14	89.7	0.17	91.9	0.14	156.4	0.16	91.4	0.09	109.8
1200	0.09	46.8	0.13	91.6	0.12	90.4	0.11	91.6	0.11	90.8	0.14	228.2	0.12	67.4
1600	0.07	248.2	0.11	89.4	0.12	88	0.12	90	0.11	67.6	0.12	91.1	0.13	70.4
1800	0.06	68.8	0.09	230	0.07	159	0.06	113.2	0.12	336.2	0.12	110.4	0.14	330.8
2150	0.09	43.2	0.07	90.3	0.08	44.9	0.08	92.1	0.09	44.9	0.12	68	0.14	341.9
2200	0.05	0.7	0.04	1.7	0.04	89.7	0.05	44.7	0.06	18.2	0.05	88	0.02	219.4
Sum	76		119		131		45		50		9		4	Tot.Dir 434
Perc	0.50%		0.78%		0.86%		0.29%		0.33%		0.06%		0.03%	2.83%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **104 of 129**

Title: **METOCEAN DATA**

6.3.9 Current Profile (m/s) for Fatigue Analysis with S Direction at surface

	0.00	0.10	0.20	0.30	0.40	0.50	0.60		0.70		0.80	0.90	1.00	
	0.10	0.20	0.30	0.40	0.50	0.60	0.70		0.80	0.90	1.00	1.10	1.20	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	
50	0.08	181.3	0.18	180.3	0.27	180.5	0.37	181.2	0.47	182.8	0.55	181.8	0.67	180.9
100	0.23	182.7	0.2	200.4	0.29	181.2	0.36	180.9	0.42	181.1	0.53	182	0.52	179.4
150	0.24	200.9	0.21	179.7	0.27	181.3	0.29	180	0.38	181.8	0.46	179.6	0.26	160.1
200	0.13	112	0.23	179.3	0.28	178.9	0.28	178.8	0.36	181.5	0.41	181.3	0.47	180.7
250	0.13	133.7	0.19	180.1	0.22	180.6	0.24	179.7	0.34	181.3	0.36	179.8	0.54	177.7
300	0.09	226.8	0.15	177.3	0.23	181	0.19	180.1	0.28	180.5	0.31	179.5	0.48	178.5
350	0.17	183.6	0.13	179.8	0.19	178.6	0.19	180	0.24	180	0.23	178.3	0.32	176.6
800	0.13	86	0.14	134.1	0.14	114.2	0.14	132.8	0.17	110.7	0.16	139.8	0.14	134.3
1200	0.07	292.6	0.1	115.1	0.13	114.9	0.13	110.7	0.14	109.9	0.12	226.8	0.12	69.7
1600	0.11	71.5	0.11	88.7	0.11	108.8	0.13	88.3	0.12	89	0.1	90.4	0.15	117.4
1800	0.12	270.1	0.07	226.4	0.08	134.1	0.07	90.6	0.09	181.7	0.06	111.8	0.08	67.1
2150	0.07	66.6	0.08	68.7	0.08	69.9	0.1	88.8	0.08	91.5	0.11	69.2	0.12	41.9
2200	0.06	0.4	0.04	358.7	0.05	45.7	0.05	94.3	0.04	21.3	0.06	18.2	0.02	20.3
Sum	85		150		152		182		136		94		20	
Perc	0.56%		0.98%		0.99%		1.19%		0.89%		0.61%		0.13%	

	0.70	
	0.80	
Depth	Int.	Dir.
50	0.74	181.3
100	0.72	180.6
150	0.64	180.7
200	0.52	187.1
250	0.43	183.8
300	0.37	182.2
350	0.29	182.5
800	0.12	93.4
1200	0.06	45
1600	0.09	322
1800	0.07	180.3
2150	0.1	81.3
2200	0.04	21
Sum	6	Tot.Dir 825
Perc	0.04%	5.39%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **105 of 129**

Title: **METOCEAN DATA**

6.3.10 Current Profile (m/s) for Fatigue Analysis with SSW Direction at surface

	0.00	0.10	0.20	0.30	0.40	0.50	0.60							
	0.10	0.20	0.30	0.40	0.50	0.60	0.70							
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.						
50	0.09	203.9	0.17	203	0.27	203	0.37	201.6	0.47	202.3	0.57	202.7	0.67	205.2
100	0.15	247.6	0.19	204.1	0.3	202.1	0.37	202.8	0.46	201.5	0.55	202.1	0.67	204.6
150	0.16	246.2	0.19	223	0.32	202.2	0.3	200.5	0.38	200.6	0.53	203.6	0.6	204.6
200	0.18	248.7	0.24	179.8	0.28	202.4	0.27	180	0.37	203.4	0.46	202.4	0.63	204.2
250	0.15	269.8	0.14	200.1	0.24	180.5	0.24	180.4	0.36	201.4	0.41	201.7	0.54	203
300	0.15	269.4	0.19	248.7	0.19	179.4	0.25	203.3	0.35	202.6	0.41	204.5	0.49	203.2
350	0.14	269.7	0.2	159.5	0.17	202.5	0.18	179.6	0.23	180.3	0.36	203.4	0.49	204.5
800	0.11	64.5	0.16	66.1	0.12	113.5	0.12	111.9	0.16	159.7	0.16	158.6	0.15	181.8
1200	0.09	113.7	0.1	271.4	0.13	114.1	0.12	112.8	0.1	69	0.11	66.8	0.15	247
1600	0.12	87.4	0.12	91.7	0.11	45.1	0.11	112.3	0.1	66.7	0.09	89.9	0.08	134.5
1800	0.11	270.7	0.11	270.2	0.11	135.7	0.09	179.2	0.08	133.3	0.08	135.9	0.12	134.8
2150	0.1	65.7	0.09	65.9	0.09	67	0.12	68.9	0.12	67	0.11	91.8	0.09	69.3
2200	0.05	65.8	0.05	1.2	0.05	89	0.05	68	0.04	45.8	0.06	18.2	0.05	20.9
Sum	88		162		156		223		172		182		93	
Perc	0.57%		1.06%		1.02%		1.46%		1.12%		1.19%		0.61%	

	0.70	0.80	0.90	
Depth	Int.	Dir.	Int.	Dir.
50	0.78	209.1	0.85	208
100	0.77	208.9	0.79	209
150	0.74	207.4	0.81	209.3
200	0.65	206.1	0.69	207.3
250	0.59	205.4	0.55	218.3
300	0.51	205.3	0.45	208.7
350	0.42	203	0.42	205
800	0.17	202.6	0.17	202.9
1200	0.15	154.3	0.15	155.8
1600	0.19	247.3	0.17	248.2
1800	0.07	160.6	0.09	159.1
2150	0.08	91.9	0.08	88.9
2200	0.03	23.1	0.03	157.9
Sum	70		38	Tot.Dir 1184
Perc	0.46%		0.25%	7.73%

SOURCE: PETROBRAS Proprietary Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **106 of 129**

Title: **METOCEAN DATA**

6.3.11 Current Profile (m/s) for Fatigue Analysis with SW Direction at surface

	0.00		0.10		0.20		0.30		0.40		0.50		0.60	
	0.10		0.20		0.30		0.40		0.50		0.60		0.70	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.09	226.5	0.16	226.3	0.28	225	0.38	226.5	0.47	225.8	0.57	226.7	0.67	222.7
100	0.11	227.3	0.18	226	0.31	226.9	0.36	226.8	0.44	227	0.54	225.6	0.66	223.5
150	0.14	244.8	0.19	247	0.32	226.8	0.37	226	0.45	227.2	0.55	225	0.62	222.8
200	0.14	269	0.21	246.5	0.3	225.3	0.33	227.1	0.48	225.3	0.47	224.4	0.52	223.7
250	0.16	248.9	0.22	247.7	0.27	225.8	0.29	226.3	0.48	226.2	0.42	223.4	0.44	223
300	0.15	271.2	0.19	248.4	0.21	225.4	0.26	226.7	0.42	225.4	0.38	224	0.39	222.7
350	0.14	246.7	0.16	247.2	0.2	224.2	0.26	225.2	0.36	225.7	0.33	223.2	0.33	222.4
800	0.11	272.7	0.13	245.9	0.12	246.7	0.14	249.4	0.13	268.8	0.17	203.3	0.16	203.8
1200	0.08	245	0.08	268.1	0.1	314.8	0.08	291.2	0.1	294.8	0.14	200.6	0.14	177.9
1600	0.09	66.2	0.08	247.3	0.11	91.6	0.12	87.9	0.1	269.5	0.12	248.1	0.12	227.4
1800	0.08	224.7	0.1	247.5	0.08	271.2	0.09	315	0.08	224.7	0.11	247.7	0.15	267.6
2150	0.08	68.7	0.07	89.7	0.1	113.5	0.11	67.4	0.12	43.8	0.06	89.5	0.09	336.6
2200	0.04	67.9	0.04	359.5	0.04	46.9	0.06	20.5	0.05	21.7	0.07	19.5	0.08	18.8
Sum	94		202		210		212		223		155		158	
Perc	0.61%		1.32%		1.37%		1.38%		1.46%		1.01%		1.03%	

	0.70		0.80		0.90		1.00		1.10		1.20		1.30		
	0.80		0.90		1.00		1.10		1.20		1.30		1.40		
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	
50	0.78	224.1	0.87	223.6	0.96	224.8	1.05	222.6	1.15	223.6	1.28	219.2	1.35	221.2	
100	0.76	224.4	0.83	224.2	0.93	225.2	1.01	223.8	1.09	225.4	1.22	219.6	1.07	231	
150	0.71	225	0.79	224.4	0.8	224.9	0.9	225.5	0.97	225.5	0.99	220.7	0.88	240	
200	0.61	225.6	0.6	226.1	0.67	224.5	0.65	224.1	0.89	224.9	0.62	217	0.9	230.8	
250	0.53	225.2	0.53	225.8	0.59	224.8	0.56	225.1	0.69	226.8	0.52	222.1	0.73	229	
300	0.49	224.8	0.47	225.4	0.48	224.5	0.49	225.4	0.61	227.3	0.47	223.2	0.62	231.8	
350	0.4	225.7	0.42	226.7	0.45	225.3	0.45	226.8	0.56	231.3	0.33	228.2	0.58	233.9	
800	0.17	203	0.17	177.8	0.27	200.2	0.29	196.5	0.26	246.9	0.26	179.4	0.18	242.9	
1200	0.14	226.8	0.1	179.3	0.17	201.2	0.18	183.6	0.16	178.9	0.14	183.5	0.2	213	
1600	0.12	222.8	0.13	249.2	0.13	180.3	0.2	181.9	0.06	246.1	0.19	187.2	0.01	147.6	
1800	0.09	225.9	0.09	224.6	0.1	227.2	0.11	246.1	0.09	218.9	0.04	228.8	0.03	285.9	
2150	0.11	43.6	0.1	202.4	0.12	223.8	0.12	221.1	0.07	132	0.03	254.4	0.05	7.8	
2200	0.07	19.5	0.04	315	0.04	293.4	0.08	313.3	0.03	357.8	0.02	216.2	0.04	2.8	
Sum	160		104		95		35		16		1		1	Tot.Dir 1666	
Perc	1.05%		0.68%		0.62%		0.23%		0.10%		0.01%		0.01%		10.88%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **107 of 129**

Title: **METOCEAN DATA**

6.3.12 Current Profile (m/s) for Fatigue Analysis with WSW Direction at surface

	0.00		0.10		0.20		0.30		0.40		0.50		0.60	
	0.10		0.20		0.30		0.40		0.50		0.60		0.70	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.09	248.4	0.17	246.7	0.28	247.9	0.38	246.9	0.47	246.6	0.57	248.5	0.67	249.3
100	0.13	246.4	0.18	248.2	0.3	249.5	0.38	247.9	0.46	247.2	0.57	248.4	0.68	248.8
150	0.19	243.5	0.19	247.1	0.29	247.2	0.37	247.6	0.45	248.8	0.53	248.1	0.61	248.7
200	0.17	271.2	0.16	269	0.26	245.9	0.36	247.5	0.44	247.9	0.47	247.7	0.53	249.3
250	0.19	245.4	0.19	268.4	0.26	249	0.35	248	0.42	247.9	0.41	247.8	0.45	248.5
300	0.18	247.9	0.17	248.9	0.23	247.6	0.3	247.8	0.35	247.2	0.38	247.7	0.39	248.9
350	0.11	223	0.16	269.3	0.21	268.2	0.27	247.1	0.33	247.5	0.34	247.3	0.36	248.7
800	0.13	248.1	0.12	246.7	0.1	293.7	0.12	248.1	0.13	247.7	0.16	270.1	0.17	266.7
1200	0.07	270.4	0.09	249.4	0.11	247.7	0.12	223.7	0.12	247.5	0.1	270.1	0.13	248.1
1600	0.08	248.5	0.08	246.1	0.08	269.8	0.1	225.3	0.11	249	0.09	227.4	0.11	203.4
1800	0.05	157.2	0.09	247.2	0.09	245.8	0.11	249.2	0.08	270.9	0.1	202.3	0.06	269
2150	0.06	68.6	0.08	90	0.08	135.6	0.11	67	0.12	45.1	0.06	46.7	0.06	19.5
2200	0.05	1.7	0.05	359.9	0.04	43.7	0.06	18.8	0.07	18.3	0.05	0.3	0.06	21.1
Sum	97		237		218		336		287		192		123	
Perc	0.63%		1.55%		1.42%		2.19%		1.87%		1.25%		0.80%	

	0.70		0.80		0.90		1.00	
	0.80		0.90		1.00		1.10	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.77	247.2	0.86	246.1	0.95	249.4	1.04	245.1
100	0.77	248.8	0.84	245.3	0.92	248.9	1.02	242.4
150	0.72	247.7	0.71	246.3	0.77	247.7	0.85	238.7
200	0.62	246.9	0.6	246.8	0.75	252.3	0.54	232
250	0.53	247	0.49	245.7	0.62	252.5	0.52	230.3
300	0.44	245.9	0.47	246.4	0.53	251.5	0.42	230.7
350	0.41	246.9	0.42	247.6	0.46	250.6	0.36	228.5
800	0.15	249	0.11	159.6	0.22	230.1	0.07	179.6
1200	0.14	246.9	0.09	224.5	0.15	247.3	0.05	227.6
1600	0.11	244.5	0.1	247.3	0.11	248.6	0.12	250.2
1800	0.1	224.3	0.1	225.2	0.13	243.9	0.08	193.7
2150	0.09	46.1	0.15	67.8	0.16	225.6	0.08	132.1
2200	0.05	20.7	0.04	22.3	0.04	315.6	0.03	91.8
Sum	106		72		37		4	Tot.Dir 1709
Perc	0.69%		0.47%		0.24%		0.03%	11.16%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **108 of 129**

Title: **METOCEAN DATA**

6.3.13 Current Profile (m/s) for Fatigue Analysis with W Direction at surface

	0.00	0.10	0.20	0.30	0.40	0.50	0.60		0.10	0.20	0.30	0.40	0.50	0.60	0.70	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.09	269.8	0.17	269.5	0.27	269.9	0.37	270.3	0.46	267.9	0.57	266.8	0.66	266.4		
100	0.13	270	0.2	268.7	0.28	271	0.37	269.4	0.49	266.6	0.58	267.3	0.66	268.2		
150	0.15	271.3	0.2	268.9	0.29	270.3	0.36	269.7	0.53	267.8	0.58	267.7	0.62	268.2		
200	0.16	269.3	0.18	270.9	0.24	270.5	0.34	270.5	0.46	266.9	0.46	267.9	0.51	269		
250	0.16	250.2	0.17	270	0.24	270.3	0.33	269.9	0.45	269	0.49	270.1	0.5	269.7		
300	0.15	270.3	0.15	269.7	0.21	270.3	0.28	270.4	0.43	268.8	0.36	250.3	0.43	270.6		
350	0.11	249.9	0.14	270.5	0.19	268	0.27	271.6	0.41	269.8	0.36	250.4	0.4	269.8		
800	0.13	245	0.13	270.1	0.12	293.5	0.14	271.9	0.14	271	0.14	290.1	0.15	274		
1200	0.07	243.8	0.09	269.4	0.12	248.2	0.1	247.4	0.12	246.2	0.1	289.3	0.11	289.1		
1600	0.07	246.1	0.09	245.7	0.09	224.4	0.11	224.6	0.1	268.5	0.08	287.6	0.08	337.2		
1800	0.12	270.4	0.07	223.8	0.08	155.6	0.07	180.4	0.1	266.7	0.05	67.9	0.07	64.8		
2150	0.07	246.8	0.08	44.6	0.1	65.7	0.07	66.4	0.1	65.3	0.16	65.3	0.09	24.8		
2200	0.05	0.7	0.04	357.7	0.04	91	0.05	22.4	0.07	18.7	0.07	20.9	0.07	17.1		
Sum	97		288		254		244		161		94		60			
Perc	0.63%		1.88%		1.66%		1.59%		1.05%		0.61%		0.39%			

	0.70	0.80	0.90	1.00	1.10	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.76	267.4	0.85	266.9	0.95	273.6
100	0.75	268.4	0.85	265.5	0.93	274.2
150	0.69	270.3	0.82	264.6	0.8	270.7
200	0.55	270.6	0.71	266.2	0.7	271.2
250	0.52	270.1	0.66	268	0.56	273.4
300	0.54	267.2	0.56	267	0.47	286
350	0.45	267.3	0.48	269.6	0.43	286.9
800	0.14	273.5	0.13	274.1	0.17	273.9
1200	0.06	85.5	0.11	315.5	0.14	250.3
1600	0.08	114.1	0.1	221	0.11	252.7
1800	0.11	43.2	0.11	266	0.13	110.1
2150	0.09	94.2	0.15	85.2	0.14	95.1
2200	0.07	20.1	0.06	21.5	0.04	113.6
Sum	31		18		15	1
Perc	0.20%		0.12%		0.10%	0.01%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **109 of 129**

Title: **METOCEAN DATA**

6.3.14 Current Profile (m/s) for Fatigue Analysis with WNW Direction at surface

	0.00		0.10		0.20		0.30		0.40		0.50		0.60	
	0.10		0.20		0.30		0.40		0.50		0.60		0.70	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.09	292.9	0.17	291.6	0.27	292	0.36	291.7	0.47	293.6	0.57	294.3	0.65	292
100	0.18	292.7	0.22	291.8	0.3	292.3	0.43	292.5	0.53	293.1	0.56	291.7	0.59	292.7
150	0.23	291.6	0.2	270.1	0.3	293.1	0.45	294	0.51	293.3	0.47	292.4	0.58	293.9
200	0.21	271.8	0.2	292.3	0.24	292.7	0.37	291.8	0.41	294	0.39	293.6	0.51	292.2
250	0.17	268.9	0.14	290.7	0.21	292	0.34	291.4	0.28	312.8	0.47	271.3	0.41	271.7
300	0.19	269.4	0.15	271.7	0.21	292.8	0.3	289.8	0.23	314.4	0.37	272.1	0.37	289.3
350	0.13	288.9	0.15	269.3	0.19	292.6	0.23	291.8	0.24	313.9	0.28	291.8	0.32	272.2
800	0.11	291.9	0.1	293.3	0.1	317.8	0.11	315.6	0.13	336.7	0.11	266	0.14	246.9
1200	0.08	227.1	0.11	248.5	0.08	291.9	0.1	289.6	0.05	289.1	0.05	20.7	0.09	67.7
1600	0.07	248	0.09	247	0.09	66.8	0.08	68.3	0.09	46.6	0.08	112.1	0.07	88.5
1800	0.1	271.3	0.07	158.6	0.09	157.1	0.11	90.5	0.05	158.6	0.05	67.9	0.07	161
2150	0.09	335.7	0.08	89.5	0.09	67.4	0.11	89	0.07	65.9	0.08	68.6	0.07	65
2200	0.04	18.2	0.05	21.3	0.04	66.7	0.04	43.2	0.04	66.7	0.03	44.6	0.04	46.6
Sum	84		255		261		182		142		105		68	
Perc	0.55%		1.67%		1.70%		1.19%		0.93%		0.69%		0.44%	

	0.70		0.80		0.90		1.00	
	0.80		0.90		1.00		1.10	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.76	296.2	0.86	296.4	0.96	291.6	1.06	285.7
100	0.77	294.2	0.84	295.6	0.9	290.5	0.9	282.2
150	0.69	289.1	0.75	294.2	0.73	289.8	0.81	276.2
200	0.56	296.3	0.65	293.6	0.62	292.6	0.66	279.3
250	0.37	313.7	0.58	292.6	0.58	290.1	0.6	274.8
300	0.4	297.4	0.5	290.2	0.55	286.1	0.56	277.7
350	0.45	295.8	0.47	290.8	0.49	278.2	0.48	275.6
800	0.17	244.9	0.16	293.7	0.18	295.6	0.11	313.7
1200	0.09	271.3	0.05	339.6	0.08	247.5	0.12	272.4
1600	0.12	73.2	0.05	338.6	0.08	268.9	0.11	225.2
1800	0.06	67.1	0.09	113.4	0.07	107.4	0.04	179.7
2150	0.06	44.9	0.1	89	0.12	88.9	0.04	87
2200	0.05	43.2	0.05	65.6	0.07	64.4	0.05	42
Sum	25		43		23		9	Tot.Dir 1197
Perc	0.16%		0.28%		0.15%		0.06%	7.82%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **110 of 129**

Title: **METOCEAN DATA**

6.3.15 Current Profile (m/s) for Fatigue Analysis with NW Direction at surface

	0.00	0.10	0.20	0.30	0.40	0.50	0.60		0.10	0.20	0.30	0.40	0.50	0.60	0.70	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.08	315.2	0.17	314.3	0.27	313.7	0.36	314.5	0.46	312.4	0.57	314.7	0.65	315.2		
100	0.14	294.8	0.17	314	0.31	314.6	0.39	314.6	0.47	313.3	0.56	314.6	0.61	314.5		
150	0.15	270.9	0.17	294.1	0.29	312.5	0.33	314.8	0.37	316.9	0.52	315.1	0.56	314.3		
200	0.17	270.8	0.18	294.9	0.27	314.6	0.3	315.4	0.36	314.5	0.42	314.7	0.46	314.5		
250	0.16	290.4	0.15	271.6	0.24	316.4	0.26	313.6	0.33	312.6	0.39	313.6	0.39	314		
300	0.13	268.5	0.12	292.4	0.22	314	0.26	313.9	0.3	313.6	0.36	314	0.3	309.9		
350	0.13	269.9	0.13	267.7	0.19	316.5	0.23	293.3	0.32	314.1	0.34	312.9	0.29	314.1		
800	0.07	67.5	0.09	291.9	0.12	338.7	0.11	335.9	0.13	292	0.12	313.9	0.15	293.8		
1200	0.08	271.6	0.07	246.6	0.08	336.7	0.09	294.1	0.12	268.1	0.09	270.2	0.09	44.2		
1600	0.09	112.9	0.12	68.4	0.09	88.8	0.07	90.5	0.11	109.9	0.1	87.8	0.12	108.4		
1800	0.06	289.8	0.07	157.4	0.07	155.6	0.12	111.7	0.09	160.4	0.08	89.7	0.13	109.4		
2150	0.08	68.8	0.07	111.1	0.08	91.9	0.1	69.7	0.12	68.1	0.11	86.9	0.13	90.3		
2200	0.04	24.1	0.04	47.1	0.04	64.4	0.05	67.5	0.05	46.3	0.05	46.2	0.06	88.3		
Sum	82		169		148		126		64		57		48			
Perc	0.54%		1.10%		0.97%		0.82%		0.42%		0.37%		0.31%			

	0.70	0.80	0.90	1.00		1.00	1.10	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.77	313.7	0.84	309.7	0.93	310.4	1.03	308.3
100	0.71	311.4	0.74	310.7	0.89	302.1	0.83	299.4
150	0.64	311.9	0.66	308.1	0.56	299.3	0.61	300.2
200	0.52	310.1	0.6	295.8	0.5	297.1	0.5	294.4
250	0.41	311.8	0.5	298.1	0.45	298.4	0.44	301.9
300	0.4	314	0.51	296.9	0.42	296.5	0.43	307.1
350	0.35	310.6	0.45	293.1	0.4	293	0.35	296.6
800	0.08	317	0.17	245.2	0.23	265.7	0.21	266.3
1200	0.17	42.8	0.07	293.5	0.11	218.8	0.14	208
1600	0.12	68.2	0.09	68.8	0.15	95.6	0.1	104.8
1800	0.1	134.6	0.06	109.3	0.13	107.9	0.11	138.2
2150	0.07	69.9	0.08	89	0.12	108.4	0.12	123.5
2200	0.04	70.7	0.04	93.2	0.05	42.7	0.05	78.7
Sum	29		20		8		3	Tot.Dir 754
Perc	0.19%		0.13%		0.05%		0.02%	4.92%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **111 of 129**

Title: **METOCEAN DATA**

6.3.16 Current Profile (m/s) for Fatigue Analysis with NNW Direction at surface

	0.00		0.10		0.20		0.30		0.40		0.50		0.60	
	0.10		0.20		0.30		0.40		0.50		0.60		0.70	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.08	337.7	0.18	337.5	0.27	337.1	0.37	335.9	0.47	337	0.55	340.6	0.66	334.2
100	0.13	316.6	0.17	337.2	0.25	316.8	0.38	334.1	0.43	337.1	0.55	337.4	0.5	337.4
150	0.18	314.2	0.18	336.6	0.28	316.2	0.28	319.5	0.37	337.1	0.42	334.7	0.48	338.7
200	0.18	246.6	0.16	339	0.3	314.6	0.27	336.7	0.33	356.3	0.38	339.4	0.48	335.5
250	0.14	291.5	0.13	359.9	0.33	292.6	0.22	337.5	0.28	338.9	0.32	339.4	0.32	337.8
300	0.13	291.6	0.12	357	0.19	314.6	0.23	336.1	0.26	318.8	0.31	334.7	0.22	318.4
350	0.1	0.2	0.12	338.7	0.13	338.2	0.2	314	0.23	314.5	0.25	358.4	0.26	337.9
800	0.09	90.6	0.09	337.5	0.07	314.7	0.16	335.3	0.15	1.6	0.15	359.3	0.12	336.3
1200	0.11	110.8	0.1	90.1	0.09	228.9	0.12	316.9	0.15	1.8	0.11	70.7	0.06	90.2
1600	0.08	71.2	0.09	67.4	0.1	68.6	0.11	67	0.12	112.1	0.13	91.8	0.14	93.4
1800	0.06	155.4	0.08	156.3	0.07	131.1	0.08	112.5	0.1	133.1	0.12	114.5	0.07	66.1
2150	0.08	48.1	0.08	23.8	0.11	90.8	0.09	88.5	0.1	89.2	0.12	112.8	0.1	65.1
2200	0.06	2.7	0.04	359.2	0.03	113.8	0.04	90.5	0.05	44.6	0.05	67.3	0.04	90.8
Sum	76		145		94		65		49		42		18	
Perc	0.50%		0.95%		0.61%		0.42%		0.32%		0.27%		0.12%	

	0.70		0.80		0.90	
	0.80		0.90		1.00	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.76	342	0.84	339.5	0.9	338.3
100	0.63	340.9	0.58	342.8	0.56	343
150	0.48	341.1	0.34	339.1	0.31	334.5
200	0.44	340.3	0.21	1.7	0.23	20.3
250	0.38	338.8	0.3	359.7	0.27	3.3
300	0.34	343.4	0.35	344	0.23	3.6
350	0.29	340.6	0.24	342.5	0.23	357.7
800	0.16	1	0.08	72.1	0.04	47.8
1200	0.16	93	0.17	308	0.15	80.1
1600	0.15	47.1	0.13	90	0.14	75.9
1800	0.12	110	0.11	97.8	0.06	117.6
2150	0.14	89.2	0.1	70.6	0.07	113.1
2200	0.06	46.9	0.04	31.3	0.02	79.7
Sum	27		12		1	Tot.Dir 529
Perc	0.18%		0.08%		0.01%	3.46%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **112 of 129**

Title: **METOCEAN DATA**

6.3.17 Current Profile (m/s) for Fatigue Analysis with N Direction at 800m

	0.05		0.10		0.15		0.20		0.25		0.30		0.35		
	0.10		0.15		0.20		0.25		0.30		0.35		0.40		
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	
50	0.41	358	0.25	0.1	0.19	132.4	0.49	315	0.28	293.8	0.2	266.9	0.22	294.9	
100	0.4	332.9	0.17	43.9	0.13	158.1	0.18	159.3	0.35	293.2	0.31	318.6	0.22	284.6	
150	0.19	319.8	0.36	331.8	0.25	130.9	0.2	313.1	0.2	315	0.14	293.9	0.12	298.6	
200	0.3	335.2	0.31	336.5	0.34	131.4	0.18	297	0.17	314.8	0.17	312.7	0.16	288.9	
250	0.29	340.2	0.27	341.2	0.33	115	0.22	93.1	0.17	315.8	0.17	315	0.12	317.4	
300	0.12	47.2	0.27	335.6	0.18	335.6	0.18	314.7	0.16	315.7	0.16	336.5	0.16	336.5	
350	0.11	357.3	0.27	338.5	0.34	115.3	0.16	316	0.16	316	0.16	337.8	0.18	338.6	
800	0.09	18.8	0.14	357.2	0.2	1.1	0.24	341.4	0.29	344.1	0.33	343.3	0.37	344.2	
1200	0.19	298.1	0.21	68.7	0.14	0.2	0.16	338	0.18	339.7	0.18	357.2	0.17	336.2	
1600	0.27	85.1	0.15	90.2	0.1	111.1	0.06	67.2	0.08	247.5	0.09	269.8	0.05	196.2	
1800	0.12	129.9	0.14	135	0.07	42.9	0.04	181	0.07	135.9	0.09	135.8	0.06	130.6	
2150	0.14	0.5	0.13	113.7	0.09	44.2	0.12	46.3	0.07	24.3	0.08	65.7	0.06	87.6	
2200	0.04	69.3	0.05	89.4	0.05	69.1	0.05	43.9	0.04	44	0.04	68.4	0.04	66.7	
Sum	11		18		39		94		86		50		4	Tot.Dir	302
Perc	0.07%		0.12%		0.25%		0.61%		0.56%		0.33%		0.03%		1.97%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.18 Current Profile (m/s) for Fatigue Analysis with NE Direction at 800m

	0.00		0.05		0.10		0.15		0.20		0.25		0.30	
	0.05		0.10		0.15		0.20		0.25		0.30		0.35	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.71	319.8	0.48	340.4	0.24	44.9	0.22	70.6	0.16	204.3	0.38	284.4		
100	0.43	316.2	0.39	335.5	0.24	64.8	0.24	65.8	0.15	221.8	0.38	273.4		
150	0.3	314.5	0.34	329.3	0.21	66.2	0.22	64.4	0.16	226.8	0.32	294.4		
200	0.19	335.3	0.34	333.9	0.21	68.5	0.23	45.3	0.13	201.5	0.27	312.6		
250	0.19	329.4	0.31	339.3	0.21	46.8	0.16	64	0.1	202.1	0.22	291.4		
300	0.3	331.7	0.3	332.6	0.19	46.2	0.16	62	0.12	202.3	0.2	248.7		
350	0.29	336.3	0.32	0	0.15	48.3	0.15	44.9	0.09	203.4	0.17	295.6		
800	0.04	55	0.09	29.7	0.14	39.3	0.2	41.9	0.22	44.2	0.26	48.3		
1200	0.18	62.6	0.2	78.3	0.22	67.4	0.22	87.1	0.11	67.7	0.11	74.7		
1600	0.12	62.3	0.25	88.5	0.11	88.1	0.11	63.4	0.06	41.4	0.04	40.4		
1800	0.03	29.5	0.12	116.9	0.11	153.6	0.09	111.8	0.06	154.9	0.04	337.7		
2150	0.04	43.4	0.1	110	0.1	136	0.1	90.5	0.07	68.3	0.06	44.6		
2200	0.04	12.7	0.04	97.3	0.05	90	0.05	69.6	0.04	63.5	0.03	47.3		
Sum	1		3		26		25		55		6	Tot.Dir	116	
Perc	0.01%		0.02%		0.17%		0.16%		0.36%		0.04%		0.76%	

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 113 of 129

Title: METOCEAN DATA

6.3.19 Current Profile (m/s) for Fatigue Analysis with E Direction at 800m

	0.00		0.05		0.10		0.15		0.20		0.25		0.30		
	0.05		0.10		0.15		0.20		0.25		0.30		0.35		
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	
50	0.05	161	0.3	184.1	0.33	181.3	0.41	157	0.45	160.8	0.35	308.9	0.28	281.5	
100	0.09	356.2	0.37	173.8	0.33	177.8	0.43	180.4	0.47	160.7	0.35	310	0.27	272.1	
150	0.03	273.5	0.36	217.7	0.29	158.7	0.47	177.4	0.39	157.4	0.33	298.1	0.34	298.4	
200	0.08	79.9	0.38	196.2	0.31	136.4	0.22	92.9	0.33	161.6	0.34	313.5	0.34	310.4	
250	0.06	15.3	0.25	203.5	0.31	136	0.18	88.6	0.32	201	0.29	314.8	0.24	303.6	
300	0.04	63	0.27	195.3	0.25	134.5	0.34	183.4	0.25	156.7	0.29	319.6	0.21	298.6	
350	0.01	112.8	0.19	176.5	0.17	133	0.25	155.1	0.23	111.4	0.25	319.2	0.16	299.8	
800	0.05	81	0.1	106.5	0.14	94.1	0.2	93.2	0.22	109.6	0.27	83.5	0.31	79.3	
1200	0.18	86.8	0.2	91.1	0.22	111.6	0.21	88	0.24	86.7	0.08	2.8	0.03	273.4	
1600	0.07	75.9	0.14	87.3	0.18	91.3	0.14	91.2	0.15	90.4	0.06	88.8	0.05	58.3	
1800	0.06	237.3	0.09	110.9	0.1	153.2	0.06	111	0.08	220.1	0.05	331.4	0.04	307.7	
2150	0.02	179.4	0.1	85.8	0.12	68.6	0.09	70.2	0.09	87.5	0.08	21.4	0.04	14.6	
2200	0.04	76	0.06	84.8	0.05	95.2	0.05	65.2	0.05	68.7	0.03	16.3	0.02	2.7	
Sum	1		11		32		41		24		6		1	Tot.Dir	116
Perc	0.01%		0.07%		0.21%		0.27%		0.16%		0.04%		0.01%		0.76%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.20 Current Profile (m/s) for Fatigue Analysis with SE Direction at 800m

	0.05		0.10		0.15		0.20		0.25		0.30		
	0.10		0.15		0.20		0.25		0.30		0.35		
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	
50	0.34	180.5	0.4	181.9	0.51	161.2	0.55	198.4	0.5	183	0.28	276.3	
100	0.46	207.5	0.29	161	0.36	156.4	0.52	181.8	0.4	178.8	0.12	261.7	
150	0.36	206.4	0.15	229	0.48	156.5	0.53	200.5	0.29	178.1	0.23	287.1	
200	0.44	198.8	0.42	182.1	0.41	158	0.47	201.5	0.25	158.8	0.24	276.5	
250	0.31	206.4	0.4	181.1	0.34	154.5	0.27	178.9	0.25	159.3	0.18	277	
300	0.3	202.3	0.4	182.9	0.29	156.8	0.26	157.5	0.24	159	0.17	266.1	
350	0.21	226.5	0.3	181.6	0.24	136.7	0.27	181	0.24	157	0.08	220.3	
800	0.1	134.4	0.14	117.5	0.2	136.7	0.24	135.6	0.28	141.7	0.32	154.1	
1200	0.19	112	0.19	108.8	0.19	111.5	0.17	112.2	0.17	117.3	0.16	145.7	
1600	0.15	85.2	0.16	111.2	0.16	90.4	0.14	69.4	0.17	94.7	0.1	247.2	
1800	0.12	274.6	0.1	111.9	0.11	114.5	0.1	111.2	0.1	133.9	0.08	252.3	
2150	0.08	85.9	0.1	88.7	0.09	67.9	0.11	87.7	0.11	111.8	0.06	56.9	
2200	0.04	25.5	0.05	110.7	0.05	89.3	0.05	65.3	0.05	134.4	0.01	315.2	
Sum	9		36		64		103		51		4	Tot.Dir	267
Perc	0.06%		0.24%		0.42%		0.67%		0.33%		0.03%		1.74%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 114 of 129

Title: METOCEAN DATA

6.3.21 Current Profile (m/s) for Fatigue Analysis with S Direction at 800m

	0.05		0.10		0.15		0.20		0.25	
	0.10		0.15		0.20		0.25		0.30	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.54	181.3	0.61	250	0.68	225.7	0.66	225.9	0.64	244.4
100	0.44	188.7	0.56	251	0.67	225.4	0.61	225.4	0.56	227.6
150	0.4	182.7	0.8	222	0.57	225.8	0.55	225.1	0.52	226.5
200	0.45	186.7	0.54	225	0.43	244.3	0.46	224.1	0.38	225.6
250	0.45	177.1	0.37	223.4	0.39	225.6	0.41	225.4	0.33	223.5
300	0.41	174.1	0.42	222.8	0.32	221.9	0.33	224.9	0.32	225.1
350	0.34	184.8	0.39	222	0.3	224.7	0.32	225.8	0.33	221.8
800	0.1	165	0.15	183.2	0.2	179.7	0.23	179.8	0.28	180
1200	0.2	270.8	0.24	153.8	0.3	178.5	0.29	178.4	0.27	179.9
1600	0.13	238.7	0.18	247.1	0.16	227.5	0.13	202.8	0.15	201.8
1800	0.1	131	0.19	143.1	0.11	202.5	0.13	246.7	0.08	248.6
2150	0.08	117.7	0.16	46.2	0.12	116.1	0.12	91.6	0.12	24.9
2200	0.04	110.4	0.04	352.4	0.04	359.4	0.03	0.9	0.06	21.5
Sum	2		22		64		181		111	
Perc	0.01%		0.14%		0.42%		1.18%		0.72%	

	0.30		0.35		0.40	
	0.35		0.40		0.45	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.86	225.4	0.85	226.2	0.85	229.4
100	0.81	225.7	0.78	228.7	0.79	227.5
150	0.72	226.7	0.56	223.1	0.67	226.8
200	0.61	226.5	0.58	228.9	0.56	223.8
250	0.49	225.6	0.48	224.1	0.52	222.4
300	0.23	180.1	0.45	222.1	0.42	217.3
350	0.4	223	0.21	177.1	0.42	211.3
800	0.34	164.8	0.37	179.9	0.44	187.9
1200	0.17	200.1	0.2	179.8	0.18	184.5
1600	0.1	248.4	0.16	218.1	0.11	240.7
1800	0.11	265.3	0.11	191.7	0.1	184.6
2150	0.09	294.7	0.11	286.3	0.15	265.7
2200	0.03	92.7	0.04	158.4	0.02	183.3
Sum	22		3		5	Tot.Dir 410
Perc	0.14%		0.02%		0.03%	2.68%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 115 of 129

Title: METOCEAN DATA

6.3.22 Current Profile (m/s) for Fatigue Analysis with SW Direction at 800m

Table with 15 columns (0.00 to 0.35) and 15 rows (Depth 50 to 2200). Includes Sum and Perc rows.

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.23 Current Profile (m/s) for Fatigue Analysis with W Direction at 800m

Table with 15 columns (0.00 to 0.35) and 15 rows (Depth 50 to 2200). Includes Sum and Perc rows.

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 116 of 129

Title: METOCEAN DATA

6.3.24 Current Profile (m/s) for Fatigue Analysis with NW Direction at 800m

	0.05		0.10		0.15		0.20		0.25		0.30		0.35	
	0.10		0.15		0.20		0.25		0.30		0.35		0.40	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.67	347.1	0.3	345	0.28	294.9	0.41	246.4	0.26	317.3	0.32	319.8	0.17	280.3
100	0.28	339.1	0.37	267	0.63	298	0.33	248.7	0.22	317.3	0.27	292.9	0.19	267.5
150	0.3	319.8	0.21	314.7	0.46	313	0.33	266.7	0.23	316.7	0.24	315.1	0.11	278.9
200	0.26	333.3	0.17	321	0.28	273	0.23	293.7	0.23	293.6	0.2	314.3	0.1	286.4
250	0.14	317.8	0.15	330.6	0.43	291.7	0.19	292	0.19	293.4	0.17	312.5	0.1	304.8
300	0.09	18.4	0.19	259.8	0.37	293.3	0.25	268.7	0.2	293.2	0.19	313.7	0.11	321.9
350	0.1	322.1	0.2	275.3	0.2	272.6	0.2	269.2	0.17	292.9	0.19	292.9	0.14	324.4
800	0.09	333.7	0.15	299.8	0.2	315.9	0.24	315.1	0.29	332.2	0.33	333.2	0.36	337
1200	0.22	314.8	0.2	18.5	0.14	319.7	0.15	336.4	0.19	340.2	0.19	340.7	0.17	343.4
1600	0.07	288.5	0.15	46.3	0.11	69.7	0.11	135.4	0.08	205	0.15	128.7	0.01	129.5
1800	0.13	117.2	0.09	145.6	0.17	112.4	0.11	114.9	0.12	157.1	0.09	156.9	0.04	101.9
2150	0.12	114.8	0.08	117	0.09	45.4	0.13	87.4	0.11	136.5	0.08	111	0.08	71.6
2200	0.04	90.7	0.06	74.4	0.04	110.6	0.07	66.8	0.04	67.2	0.05	68.5	0.04	93.2
Sum	9		4		20		81		87		34		1	Tot.Dir 236
Perc	0.06%		0.03%		0.13%		0.53%		0.57%		0.22%		0.01%	1.54%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 117 of 129

Title: METOCEAN DATA

6.3.25 Current Profile (m/s) for Fatigue Analysis with N Direction at 1800 m

	0.00		0.05		0.10		0.15	
	0.05		0.10		0.15		0.20	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.43	175.8	0.54	269.5	0.44	246.8	0.54	268.9
100	0.17	181.6	0.48	337.7	0.45	248.2	0.53	267.9
150	0.21	338.4	0.36	335.8	0.47	248.1	0.58	264
200	0.18	177.2	0.36	330.9	0.53	238.4	0.55	266.9
250	0.19	84.9	0.31	340.1	0.57	240.7	0.52	265
300	0.24	90.9	0.3	336.4	0.55	238.7	0.52	232.1
350	0.16	87.7	0.24	333.2	0.52	234.3	0.48	236
800	0.17	338	0.15	90	0.19	136	0.16	283.5
1200	0.11	92	0.14	113.1	0.07	318	0.06	337.5
1600	0.16	79.3	0.17	91	0.04	345.5	0.05	33
1800	0.04	14.7	0.08	16.4	0.15	2.7	0.16	9
2150	0.08	20.9	0.1	23.8	0.16	56	0.13	64
2200	0.06	26	0.04	107.5	0.07	18.5	0.05	19.3
Sum	7		9		6		2	Tot.Dir 24
Perc	0.05%		0.06%		0.04%		0.01%	0.16%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.26 Current Profile (m/s) for Fatigue Analysis with NE Direction at 1800 m

	0.00		0.05		0.10		0.15	
	0.05		0.10		0.15		0.20	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.45	181	0.43	335.9	0.36	246.2	0.55	276.5
100	0.36	344	0.48	338	0.43	337.9	0.58	275.1
150	0.26	338.3	0.38	340.6	0.32	247.5	0.47	269.5
200	0.25	182	0.37	358.6	0.31	3.6	0.41	251
250	0.28	180.8	0.31	358.9	0.24	246.8	0.32	261.3
300	0.23	180.1	0.3	332.8	0.19	7.6	0.18	273.7
350	0.18	180.7	0.25	355	0.19	41.9	0.17	283.6
800	0.14	136.6	0.13	47.4	0.15	38.8	0.11	0.5
1200	0.15	90.2	0.13	88.1	0.09	3.3	0.14	42.4
1600	0.18	93	0.18	88.7	0.17	67.7	0.18	66.4
1800	0.04	45.7	0.08	62.8	0.15	62.6	0.17	60.7
2150	0.09	45.4	0.11	47.2	0.15	46.2	0.17	45.1
2200	0.05	25.1	0.06	67	0.07	64.3	0.12	20.3
Sum	29		44		19		11	Tot.Dir 103
Perc	0.19%		0.29%		0.12%		0.07%	0.67%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 118 of 129

Title: METOCEAN DATA

6.3.27 Current Profile (m/s) for Fatigue Analysis with E Direction at 1800 m

	0.00		0.05		0.10		0.15		0.20	
	0.05		0.10		0.15		0.20		0.25	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.38	183.2	0.44	179.8	0.42	338.2	0.3	312.3	0.29	315.8
100	0.35	201.5	0.47	338.4	0.39	338.1	0.31	314.8	0.26	321.6
150	0.4	201.5	0.42	337.9	0.39	335.8	0.37	336.2	0.34	330.6
200	0.37	204.1	0.36	335.5	0.3	316.4	0.35	334.1	0.32	332.3
250	0.27	201.2	0.29	180.6	0.23	315.3	0.31	333.8	0.23	335.8
300	0.25	179.4	0.29	160.5	0.29	336.7	0.26	336.9	0.26	322.6
350	0.17	182.3	0.24	158.8	0.27	340.1	0.24	337.4	0.24	342.1
800	0.06	91.3	0.14	21.8	0.14	22.6	0.17	2	0.02	289.4
1200	0.13	68.4	0.14	92.3	0.12	69.6	0.14	157.3	0.15	161.6
1600	0.18	68.8	0.18	90.5	0.18	67.9	0.14	89.3	0.17	91.4
1800	0.04	89.1	0.08	90.6	0.13	89.6	0.17	107.1	0.23	106.4
2150	0.07	68.1	0.1	69.5	0.14	87.7	0.18	90.6	0.21	96.2
2200	0.06	66.9	0.06	67.2	0.07	67.7	0.07	89.4	0.09	85.5
Sum	35		143		119		57		2	Tot.Dir 356
Perc	0.23%		0.93%		0.78%		0.37%		0.01%	2.33%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.28 Current Profile (m/s) for Fatigue Analysis with SE Direction at 1800 m

	0.00		0.05		0.10		0.15		0.20	
	0.05		0.10		0.15		0.20		0.25	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.36	189.9	0.36	181.2	0.43	356.7	0.37	338.3	0.26	310.3
100	0.38	206.6	0.33	201.2	0.39	338	0.42	338.7	0.21	321.4
150	0.16	67.1	0.38	182.4	0.32	336	0.37	338.4	0.35	332
200	0.27	181.1	0.31	199.3	0.3	340.2	0.29	336.7	0.25	330.8
250	0.12	47.9	0.22	200.2	0.23	180.8	0.23	339.8	0.23	6.3
300	0.22	197.8	0.21	179.8	0.25	339.1	0.27	338.4	0.26	330.5
350	0.17	184.2	0.18	177.9	0.22	312.4	0.26	341.6	0.23	341.4
800	0.14	113.5	0.14	114.3	0.15	116.9	0.15	132	0.17	4.1
1200	0.12	92.1	0.14	89.5	0.16	88.5	0.13	45.7	0.17	152.9
1600	0.17	91.3	0.18	89.9	0.18	91.3	0.18	86.9	0.15	90.4
1800	0.04	116	0.09	132.5	0.13	133	0.16	120.4	0.21	113.5
2150	0.07	90.2	0.09	111	0.13	113.2	0.17	112.4	0.19	113.9
2200	0.05	73.6	0.06	67.3	0.04	89.2	0.06	112.6	0.06	115.4
Sum	15		87		45		30		3	Tot.Dir 180
Perc	0.10%		0.57%		0.29%		0.20%		0.02%	1.18%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: I-ET-3A36.00-1000-941-PPC-001 – Rev. F

Project: NORTHERN SANTOS BASIN PRE-SALT SYSTEMS

Sheet: 119 of 129

Title: METOCEAN DATA

6.3.29 Current Profile (m/s) for Fatigue Analysis with S Direction at 1800 m

	0.00		0.05		0.10		0.15		0.20		
	0.05		0.10		0.15		0.20		0.25		
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	
50	0.48	178.5	0.48	202.5	0.47	315.3	0.51	182.3	0.26	164.3	
100	0.36	194.6	0.47	200.2	0.5	311.5	0.34	181.2	0.21	178.5	
150	0.28	173	0.47	203.9	0.52	204.4	0.31	186	0.19	162	
200	0.32	188.3	0.36	200.7	0.48	316.7	0.27	181.5	0.18	148.4	
250	0.4	187.7	0.37	204.4	0.36	323	0.28	163.7	0.1	166.9	
300	0.24	202.3	0.15	245.7	0.41	316.4	0.25	156	0.11	139.9	
350	0.25	182.3	0.24	178.2	0.28	299.8	0.24	131.2	0.08	138.4	
800	0.1	116.5	0.14	114.6	0.15	289	0.13	153.6	0.17	155.7	
1200	0.13	93.7	0.1	91.1	0.16	69.9	0.1	180.5	0.08	190.3	
1600	0.19	75.5	0.16	114.1	0.22	85.3	0.12	109	0.07	246.3	
1800	0.04	184.8	0.09	182.4	0.13	161.3	0.17	177	0.2	194.9	
2150	0.03	100.2	0.06	179.1	0.11	153.4	0.14	157	0.19	190.1	
2200	0.04	1.7	0.05	67.8	0.05	133.3	0.05	158	0.04	211.3	
Sum	9		20		9		23		2	Tot.Dir	63
	0.06%		0.13%		0.06%		0.15%		0.01%		0.41%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.30 Current Profile (m/s) for Fatigue Analysis with SW Direction at 1800 m

	0.00		0.05		0.10		0.15		0.20		
	0.05		0.10		0.15		0.20		0.25		
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	
50	0.53	225	0.56	226.3	0.54	226.8	0.55	224.4	0.43	178.8	
100	0.05	51.4	0.27	202.5	0.31	247.9	0.52	225.4	0.33	164.6	
150	0.05	46.6	0.18	206.8	0.22	245.3	0.48	225	0.36	170.4	
200	0.35	204.6	0.41	206.2	0.5	227.7	0.44	225.7	0.4	158.4	
250	0.34	186.1	0.21	250.6	0.27	249.2	0.4	221.8	0.28	151.9	
300	0.24	92.3	0.31	274.9	0.36	227.2	0.36	220.9	0.18	153.5	
350	0.16	4.6	0.32	264.8	0.38	247.4	0.32	223.6	0.19	133	
800	0.19	358.5	0.12	248.3	0.15	256.1	0.16	179.6	0.14	172.2	
1200	0.07	130	0.12	202.5	0.15	242	0.13	203	0.11	134.2	
1600	0.17	113.2	0.16	223.1	0.19	229.4	0.14	225.2	0.1	199.8	
1800	0.05	209.6	0.09	223.3	0.15	244.3	0.17	225.7	0.25	228.8	
2150	0.12	169.3	0.09	241.8	0.14	244	0.14	204.1	0.18	226.4	
2200	0.02	48.2	0.05	316.2	0.07	318.9	0.07	242.4	0.05	267.6	
Sum	7		16		19		39		5	Tot.Dir	86
Perc	0.05%		0.10%		0.12%		0.25%		0.03%		0.56%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIWI 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **120 of 129**

Title: **METOCEAN DATA**

6.3.31 Current Profile (m/s) for Fatigue Analysis with W Direction at 1800 m

	0.00		0.05		0.10		0.15		0.20		0.25		
	0.05		0.10		0.15		0.20		0.25		0.30		
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	
50	0.35	176.4	0.51	231.1	0.19	248.2	0.56	228.7	0.55	246.8	0.54	246.2	
100	0.41	170.2	0.49	237.9	0.19	248.3	0.56	228.3	0.61	231.2	0.57	240.4	
150	0.3	182.4	0.4	225.1	0.22	248.2	0.45	245.9	0.59	222.6	0.61	224.4	
200	0.31	178.1	0.39	233.1	0.25	250.3	0.68	232.5	0.53	228.4	0.53	227.2	
250	0.27	166.1	0.29	225.4	0.26	247.8	0.55	227.6	0.48	219.3	0.51	220.7	
300	0.26	156.4	0.33	229.5	0.38	243.2	0.39	224.7	0.37	224.8	0.4	224.9	
350	0.17	157.7	0.31	225.6	0.43	245.2	0.28	222.3	0.28	229.2	0.31	225.7	
800	0.12	196.9	0.11	267.1	0.14	252	0.13	252.5	0.13	265.7	0.09	274.2	
1200	0.11	177.4	0.13	307.2	0.11	246.2	0.11	251.1	0.05	256	0.05	209	
1600	0.15	117.1	0.15	249	0.16	270.1	0.11	270.7	0.11	294	0.07	274	
1800	0.04	289	0.08	268.3	0.15	267.9	0.17	268.7	0.25	286	0.27	289.7	
2150	0.05	1.3	0.09	268.1	0.13	313	0.14	293	0.13	318	0.11	294	
2200	0.04	58.4	0.04	354.7	0.08	319.5	0.1	16.7	0.07	15	0.06	13.9	
Sum	4		8		30		39		3		4	Tot.Dir	88
Perc	0.03%		0.05%		0.20%		0.25%		0.02%		0.03%		0.57%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.32 Current Profile (m/s) for Fatigue Analysis with NW Direction at 1800 m

	0.00		0.05		0.10		0.15		0.20		
	0.05		0.10		0.15		0.20		0.25		
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	Int.	Dir.	
50	0.51	225.4	0.36	159.8	0.52	226.2	0.55	230	0.46	150.3	
100	0.5	223.2	0.34	163.2	0.56	225.8	0.57	229	0.48	239.9	
150	0.31	334.1	0.3	173.1	0.48	232.3	0.58	226.7	0.56	231.9	
200	0.27	180.5	0.25	183.6	0.49	229.8	0.5	205.1	0.52	234.6	
250	0.3	166.2	0.26	180.5	0.52	246.6	0.63	231.3	0.48	231.1	
300	0.24	163.4	0.18	185.9	0.27	197.5	0.53	229.2	0.38	227.9	
350	0.17	205.5	0.21	181.2	0.34	221.9	0.25	201.5	0.31	217.8	
800	0.06	230.6	0.17	131	0.18	149.4	0.11	247.7	0.15	155.9	
1200	0.15	7.9	0.16	98.8	0.15	269	0.16	133.9	0.17	155.3	
1600	0.15	118.3	0.17	265.8	0.17	251.4	0.09	241.9	0.08	251	
1800	0.04	331.3	0.07	330.9	0.15	297.8	0.19	297	0.23	296.7	
2150	0.06	3.8	0.1	3.2	0.12	315.2	0.16	315.5	0.19	314.5	
2200	0.04	69.9	0.06	24.3	0.05	1.7	0.1	15.2	0.09	353.9	
Sum	7		7		6		15		4	Tot.Dir	39
Perc	0.05%		0.05%		0.04%		0.10%		0.03%		0.25%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

E:\W1 2022-02-07T18:22:29



PETROBRAS

6.3.33 Current Profile (m/s) for Fatigue Analysis with N Direction at 2150 m

	0.10		0.15	
	0.15		0.20	
Depth	Int.	Dir.	Int.	Dir.
50	0.2	198.7	0.19	356.8
100	0.18	222.3	0.18	357
150	0.18	224.4	0.36	224.7
200	0.2	227.2	0.24	225.3
250	0.15	226.8	0.11	4.2
300	0.16	248.7	0.14	270.4
350	0.13	245.4	0.23	252.6
800	0.07	155.9	0.07	359.6
1200	0.07	135.1	0.12	289.4
1600	0.07	271.3	0.06	4.3
1800	0.11	339.4	0.11	83
2150	0.14	359.2	0.19	18
2200	0.06	21.4	0.09	18
Sum	48		6	Tot.Dir 54
Perc	0.31%		0.04%	0.35%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.34 Current Profile (m/s) for Fatigue Analysis with NE Direction at 2150 m

	0.10		0.15		0.20	
	0.15		0.20		0.25	
Depth	Int.	Dir.	Int.	Dir.	Int.	Dir.
50	0.22	23.7	0.21	22.1	0.2	20.4
100	0.22	23.2	0.21	22.6	0.22	22.9
150	0.19	1.3	0.24	22	0.18	342.3
200	0.17	22.1	0.14	293.2	0.19	335.1
250	0.15	23.7	0.15	0.2	0.15	334.1
300	0.11	336.3	0.19	270.4	0.1	338.3
350	0.11	336.8	0.11	357.8	0.06	333.8
800	0.08	24.2	0.07	340.5	0.05	273.1
1200	0.05	224	0.07	243.3	0.08	138.6
1600	0.1	67.4	0.09	45.3	0.06	138.6
1800	0.11	68.7	0.11	66.9	0.12	62.3
2150	0.14	45.8	0.18	47.5	0.22	39.8
2200	0.06	90	0.07	90.2	0.07	89.9
Sum	146		70		11	Tot.Dir 227
Perc	0.95%		0.46%		0.07%	1.48%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

6.3.35 Current Profile (m/s) for Fatigue Analysis with E Direction at 2150 m

	0.10		0.15	
	0.15		0.20	
Depth	Int.	Dir.	Int.	Dir.
50	0.22	227.1	0.24	228.7
100	0.18	338.2	0.3	229.1
150	0.16	339.3	0.27	245.2
200	0.17	25	0.23	246.5
250	0.17	273.9	0.26	248.9
300	0.15	358.1	0.28	92.3
350	0.23	87.6	0.19	200.8
800	0.11	359	0.14	353.9
1200	0.12	88.3	0.14	39.6
1600	0.12	90.2	0.11	95.6
1800	0.11	90.8	0.14	91
2150	0.13	89.4	0.16	91.7
2200	0.05	69.8	0.06	87.5
Sum	82		12	Tot.Dir 94
Perc	0.54%		0.08%	0.61%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.36 Current Profile (m/s) for Fatigue Analysis with SE Direction at 2150 m

	0.10		0.15	
	0.15		0.20	
Depth	Int.	Dir.	Int.	Dir.
50	0.23	289	0.17	334.2
100	0.29	269.4	0.24	334.7
150	0.23	248.9	0.22	342.2
200	0.13	291.5	0.23	345
250	0.33	132.4	0.18	318
300	0.2	314.1	0.12	314.3
350	0.2	314.6	0.14	333.7
800	0.14	3.4	0.09	261.5
1200	0.14	44.9	0.09	277.1
1600	0.13	89.2	0.07	97.7
1800	0.14	136.5	0.14	131.2
2150	0.14	133.3	0.16	122.2
2200	0.05	114.7	0.06	117.1
Sum	35		1	Tot.Dir 36
Perc	0.23%		0.01%	0.24%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29

6.3.37 Current Profile (m/s) for Fatigue Analysis with S Direction at 2150 m

	0.10	
	0.15	
Depth	Int.	Dir.
50	0.21	242.5
100	0.12	266.7
150	0.13	288.3
200	0.32	244.9
250	0.21	263.6
300	0.28	221.4
350	0.32	206.9
800	0.1	332.5
1200	0.07	248.8
1600	0.12	225.1
1800	0.11	247.7
2150	0.14	198.6
2200	0.03	264.2
Sum	10	Tot.Dir 10
Perc	0.07%	0.07%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.38 Current Profile (m/s) for Fatigue Analysis with SW Direction at 2150 m

	0.10		0.15	
	0.15		0.20	
Depth	Int.	Dir.	Int.	Dir.
50	0.18	41.7	0.24	239
100	0.13	16.6	0.18	251.6
150	0.14	248.2	0.16	249.3
200	0.19	241.3	0.17	232.5
250	0.19	254.3	0.18	257.1
300	0.11	341.1	0.17	229.7
350	0.37	246.3	0.16	226.6
800	0.05	145.7	0.05	359
1200	0.07	342.6	0.05	315
1600	0.07	316	0.09	295
1800	0.1	225.1	0.1	228
2150	0.13	243.5	0.16	225
2200	0.03	199.8	0.03	221.2
Sum	9		2	Tot.Dir 11
Perc	0.06%		0.01%	0.07%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

6.3.39 Current Profile (m/s) for Fatigue Analysis with W Direction at 2150 m

	0.10		0.15	
	0.15		0.20	
Depth	Int.	Dir.	Int.	Dir.
50	0.2	266.4	0.23	303.8
100	0.17	251.1	0.13	272.3
150	0.21	247.9	0.11	197.6
200	0.2	244.5	0.09	80.3
250	0.26	254.5	0.12	26.3
300	0.26	251.8	0.08	68.1
350	0.18	252.8	0.1	51
800	0.1	227.3	0.03	339.9
1200	0.07	273	0.04	216.1
1600	0.11	290	0.06	263.6
1800	0.12	249	0.09	262
2150	0.13	271.5	0.17	288.6
2200	0.1	316.5	0.07	329.6
Sum	14		1	Tot.Dir 15
Perc	0.09%		0.01%	0.10%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

6.3.40 Current Profile (m/s) for Fatigue Analysis with NW Direction at 2150 m

	0.10		0.15	
	0.15		0.20	
Depth	Int.	Dir.	Int.	Dir.
50	0.23	247.2	0.24	325.9
100	0.23	232.4	0.28	237.4
150	0.2	226.3	0.28	230.6
200	0.21	224.1	0.22	222.7
250	0.29	244.3	0.19	228.8
300	0.33	248.4	0.17	266.3
350	0.36	244.4	0.26	245.6
800	0.15	163.6	0.17	186.2
1200	0.1	245.1	0.12	122.5
1600	0.08	251.9	0.1	255.2
1800	0.09	271.4	0.15	293.4
2150	0.14	314.9	0.17	335
2200	0.07	331.8	0.02	25.7
Sum	19		3	Tot.Dir 22
Perc	0.12%		0.02%	0.14%

SOURCE: PETROBRAS Propriety Metocean Data
The complete data set covers 15311 hourly profiles (1.75 years).

EIW1 2022-02-07T18:22:29



PETROBRAS

7. SEA WATER CHARACTERISTICS

7.1 Table with Vertical Distribution of Sea Water Temperature

Depth (m)	Tmin	p5	Tavg	p95	Tmax
5	20.76	21.67	24.33	27.45	29.25
20	20.10	21.71	24.31	27.22	28.78
40	19.85	21.64	24.04	26.88	28.67
60	19.15	21.28	23.20	26.06	28.58
80	18.39	20.17	22.29	24.85	26.97
100	17.11	19.05	21.44	23.90	25.88
125	14.96	17.80	20.39	23.08	24.42
150	13.89	16.76	19.34	21.97	23.91
200	12.91	15.21	17.38	19.77	21.76
250	12.13	14.10	15.82	17.73	21.50
300	11.71	12.99	14.64	16.22	17.58
400	9.50	11.54	13.05	14.11	15.01
500	7.65	8.92	10.40	11.79	13.71
600	5.62	6.82	8.07	9.22	10.92
700	4.58	5.51	6.23	7.01	8.18
800	4.23	4.82	5.36	5.89	6.46
900	3.84	4.12	4.48	4.78	5.18
1000	3.46	3.69	3.92	4.15	4.24
1200	3.19	3.33	3.41	3.48	3.70
1400	3.19	3.47	3.60	3.72	3.79
1600	3.49	3.77	3.86	3.94	4.01
1800	3.78	3.84	3.91	3.97	4.07
2000	3.53	3.64	3.72	3.78	3.87
2200	2.82	2.97	3.11	3.27	3.48

Where: Tmin = Temperature lowest value (°C)

P5 = Percentile 5% Temperature (°C)

Tavg = Temperature average (°C)

P95 = Percentile 95% Temperature (°C)

Tmax = Temperature highest value (°C)

SOURCE: PETROBRAS Metocean Database (Engineering measurement program – moorings and CTD profiles on Santos Basin Area) and Ocean Modeling Results.

EIWI 2022-02-07T18:22:29

7.2 Table with Vertical Distribution of Sea Water Salinity

Depth (m)	Smin	p5	Savg	p95	Smax
5	35.30	36.19	36.82	37.24	37.29
20	35.56	36.43	36.87	37.18	37.29
40	36.13	36.61	36.90	37.19	37.29
60	36.31	36.64	36.92	37.19	37.29
80	35.99	36.45	36.86	37.17	37.26
100	35.75	36.24	36.78	37.08	37.24
120	35.63	36.00	36.65	36.97	37.15
150	35.49	35.72	36.39	36.84	36.94
200	35.34	35.52	35.94	36.34	36.82
250	35.24	35.37	35.64	35.84	36.16
300	35.10	35.25	35.44	35.59	35.78
400	34.83	35.00	35.18	35.32	35.40
500	34.59	34.72	34.91	35.04	35.32
600	34.31	34.48	34.64	34.75	34.95
700	34.26	34.35	34.43	34.53	34.64
800	34.23	34.26	34.33	34.39	34.45
900	34.19	34.25	34.32	34.36	34.40
1000	34.21	34.27	34.35	34.41	34.44
1200	34.34	34.38	34.47	34.54	34.58
1400	34.49	34.54	34.65	34.72	34.77
1600	34.65	34.71	34.80	34.86	34.90
1800	34.76	34.81	34.89	34.95	34.96
2000	34.79	34.85	34.93	34.98	34.99
2100	34.81	34.86	34.93	34.99	35.00
2200	34.85	34.85	34.92	34.99	34.99

Where: Smin = Salinity lowest value
P5 = Percentile 5% Salinity
Savg = Salinity average
P95 = Percentile 95% Salinity
Smax = Salinity highest value

SOURCE: PETROBRAS Metocean Database (Engineering measurement program – moorings and CTD profiles on Santos Basin Area)

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **127 of 129**

Title: **METOCEAN DATA**

7.3 Vertical Profile of Marine Fouling (mm)

DEPTH (m)	MARINE FOULING THICKNESS (mm)
+ 1.3	20
0.0	20
- 10	80
- 20	80
- 30	80
- 40	80
- 50	60
- 60	45
- 70	30
- 80	28
- 90	26
- 100	24
- 110	22
- 120	20
- 130	0
Bottom	0

SOURCE: PETROBRAS – Vertical Profile of Marine Fouling (mm) for Campos Basin (RT/MC 113 /2003).

EIW1 2022-02-07T18:22:29

7.4 Table with Vertical Distribution of Sea Water Density

Depth (m)	Dmin	p5	Davg	p95	Dmax
5	1023.4	1024.1	1024.9	1025.5	1025.6
20	1023.9	1024.2	1025.0	1025.6	1025.7
40	1024.0	1024.4	1025.2	1025.7	1025.8
60	1024.1	1024.7	1025.4	1025.9	1026.0
80	1024.7	1025.2	1025.7	1026.0	1026.4
100	1025.1	1025.6	1025.9	1026.3	1026.7
120	1025.6	1025.8	1026.1	1026.6	1026.9
150	1025.9	1026.0	1026.4	1026.8	1027.1
200	1026.3	1026.6	1026.9	1027.2	1027.4
250	1026.9	1027.1	1027.3	1027.5	1027.7
300	1027.3	1027.5	1027.6	1027.9	1028.1
400	1028.0	1028.2	1028.3	1028.5	1028.6
500	1028.7	1028.8	1028.9	1029.1	1029.3
600	1029.3	1029.5	1029.6	1029.7	1029.9
700	1030.0	1030.1	1030.2	1030.3	1030.5
800	1030.6	1030.7	1030.8	1030.9	1031.0
900	1031.2	1031.3	1031.4	1031.5	1031.6
1000	1031.8	1031.8	1031.9	1032.0	1032.1
1200	1032.8	1032.9	1033.0	1033.1	1033.2
1400	1033.9	1034.0	1034.0	1034.1	1034.2
1600	1034.9	1035.0	1035.0	1035.1	1035.2
1800	1035.9	1035.9	1036.0	1036.1	1036.1
2000	1036.9	1036.9	1037.0	1037.1	1037.1
2100	1037.4	1037.4	1037.5	1037.6	1037.6
2200	1037.9	1037.9	1038.0	1038.1	1038.1

Unit: kg/m³ (Density was calculated from T,S,P data using UNESCO standards)

Where: Dmin = Density lowest value
P5 = Percentile 5% Density
Davg = Average Density
P95 = Percentile 95% Density
Dmax = Density highest value

SOURCE: PETROBRAS Metocean Database (Engineering measurement program – moorings and CTD profiles on Santos Basin Area)

EIW1 2022-02-07T18:22:29



PETROBRAS

TECHNICAL SPECIFICATION

No.: **I-ET-3A36.00-1000-941-PPC-001 – Rev. F**

Project: **NORTHERN SANTOS BASIN PRE-SALT SYSTEMS**

Sheet: **129 of 129**

Title: **METOCEAN DATA**

Data Processing and Contribution to Document Execution

Authors (Version 0):

Guisela S. Grossmann Matheson - CENPES/PDEP/TEO (Current profiles. Fatigue profiles. Sea Water Characteristics)

Jose A M Lima – CENPES/PDEP/ TEO (Current profiles)

Eric O Ribeiro – CENPES/PDEP/ TEO (Wave)

Luiz Claudio R. Antunes – Tetrattech (Wind)

Document Review (Version 0):

Jose A M Lima – CENPES/PDEP/ TEO

Text Layout (Version 0):

Guisela S. Grossmann Matheson - CENPES/PDEP/TEO

Data Processing and Contribution to Document Execution

Authors (Version A):

Eric O Ribeiro – CENPES/PDEP/ TEO (Wave)

Guisela S. Grossmann Matheson - CENPES/PDEP/TEO (Sea Water Characteristics)

Jose A M Lima – CENPES/PDEP/ TEO (Sea Water Characteristics. Wave)

Data Processing and Contribution to Document Execution

Authors (Version B):

Wellington Ceccopieri Belo, Jose A M Lima - CENPES/PDDP/TEO (Current profiles, Scatter tables)

Gabriela Fonseca Medeiros, Eric O. Ribeiro - CENPES/PDDP/TEO (Fatigue profiles)

Document Review (Version B):

Jose A M Lima, Wellington Ceccopieri Belo – CENPES/PDDP/ TEO

Text Layout (Version B):

Gilmara Furtado - CENPES/PDEP/TEO

Data Processing and Contribution to Document Execution

Authors (Version C):

Jose A M Lima - CENPES/PDDP/TEO (Simultaneous extreme wind, wave and surface currents)

Document Review (Version C):

Eric O. Ribeiro – CENPES/PDDP/ TEO

Text Layout (Version C):

Anderson S. Rodrigues - TIC/CPSOL/APNEG/PDES

Authors (Version D):

Wellington Ceccopieri Belo (included property notice provided by Law Department)

Document Review (Version D):

Jose A M Lima – CENPES/PDDP/TEO – CENPES/PDDP/TEO

Authors (Version E):

Jose A.M. Lima - CENPES/PDIDP/ESUP/TEO

Document Review (Version E):

Luis M.P. Nunes – CENPES/PDIDP/ESUP/TEO

Authors (Version F):

Andre L. T. Mendes – CENPES/PDIDP/ESUP/TEO

Document Review (Version F):

Wellington C. Belo – CENPES/PDIDP/ESUP/TEO

Document Version 0: I-ET-3A36.00-1000-941-PPC-001.doc - 15/July/2013

Document Version A: I-ET-3A36.00-1000-941-PPC-001_RevA.doc - 10/November/2014

Document Version B: I-ET-3A36.00-1000-941-PPC-001_RevB.doc - 19/June/2017

Document Version C: I-ET-3A36.00-1000-941-PPC-001_RevC.doc - 20/April/2018

Document Version D: I-ET-3A36.00-1000-941-PPC-001_RevD.doc - 12/July/2018

Document Version E: I-ET-3A36.00-1000-941-PPC-001_RevE.doc - 25/September/2020

Document Version F: I-ET-3A36.00-1000-941-PPC-001_RevF.doc - 21/July/2021

EIWI 2022-02-07T18:22:29